



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: IF SAW Filter 325 MHz(SMD 7.0X5.0mm)

TST Parts No.:TB0457A

Customer Parts No.:_____

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Kazuma Lee

Approval by:_____ Francis Chen

Date:_____ 2008/01/28



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

IF SAW Filter 325 MHz SMD 7X5mm

MODEL NO.: TB0457A

Rev No.1

A. MAXIMUM RATING:

1. Operating Temperature: -40 °C ~ +85 (C
2. Storage Temperature: -40 (C ~ +85 (C
3. Input Power Level: 10 dBm

RoHS Compliant
Lead free
Lead-free soldering


B. Characteristics :

1. Ambient Temperature: 25 (C
2. Optimal Source Impedance(Balanced): 200 ohm
3. Optimal Load Impedance(Balanced): 200 ohm

Characteristics	Value			Note
	Min.	Typ.	Max.	
Center frequency FC MHz	-	325	-	-
Minimum Insertion Loss dB	-	18.6	20	-
1dB Bandwidth MHz	6.3	6.4	-	-
3dB Bandwidth MHz	-	6.7	6.9	-
Passband Ripple (Fc±3MHz) dB	-	0.9	1.5	-
Amplitude Ripple at any 26.875kHz adjacent segment within 6 MHz dB	-0.1	±0.07	0.1	-
Amplitude Ripple at any 24.6875kHz adjacent segment within 6 MHz dB	-0.1	±0.06	0.1	
Phase Linearity at any 26.875kHz adjacent segment within 6 MHz Deg.	-1.5	±1.0	1.5	
Phase Linearity at any 24.6875kHz adjacent segment within 6 MHz Deg.	-1.5	±1.0	1.5	
Attenuation:(Reference level from minimum insertion loss)				dB
1) Fc±3.5MHz dB	-	2.5	-	-
2) Fc±4MHz dB	10	13.5	-	-
3) Fc±5MHz dB	33	42	-	-
4) 288MHz ~ 320 MHz dB	34	39	-	-
5) 330MHz ~ 362 MHz dB	36	40	-	-
Temp Coefficient ppm/° C ²	-0.036			


C. Measurement Circuit:

(1) Single end 50 ohm to Single end 50 ohm

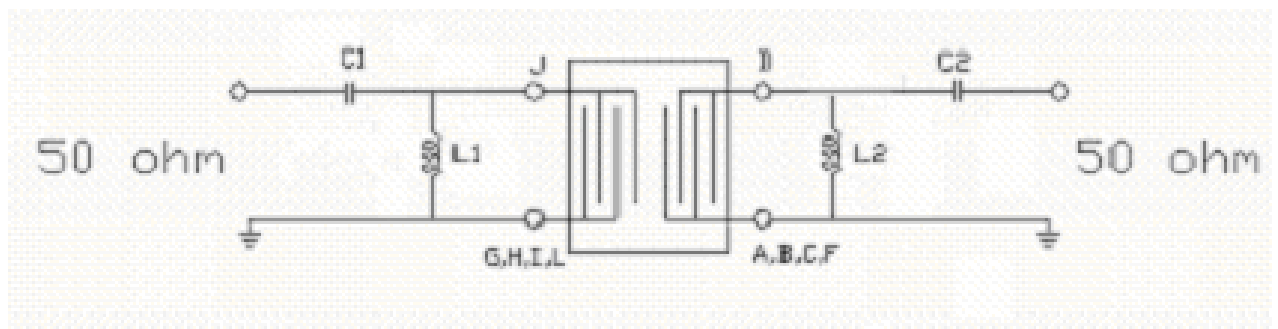


$L1=27\text{nH}$ $C1=2\text{pF}$ $L2=28\text{nH}$ $C2=1.8\text{pF}$

(2) Balanced 200 ohm to Balanced 200 ohm

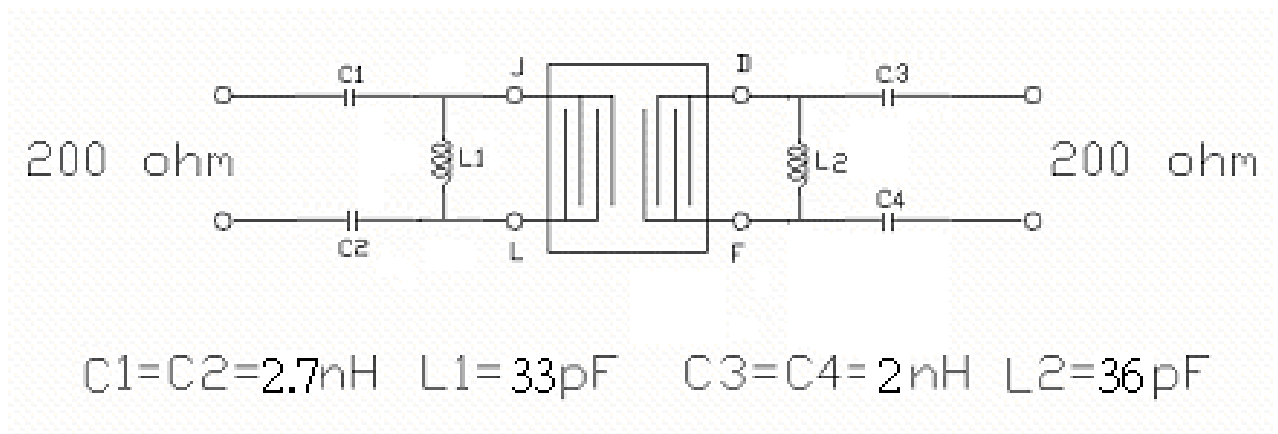

$C1=C2=2.7\text{nH}$ $L1=33\text{pF}$ $C3=C4=2\text{nH}$ $L2=36\text{pF}$

D. PCB FOOTPRINT:

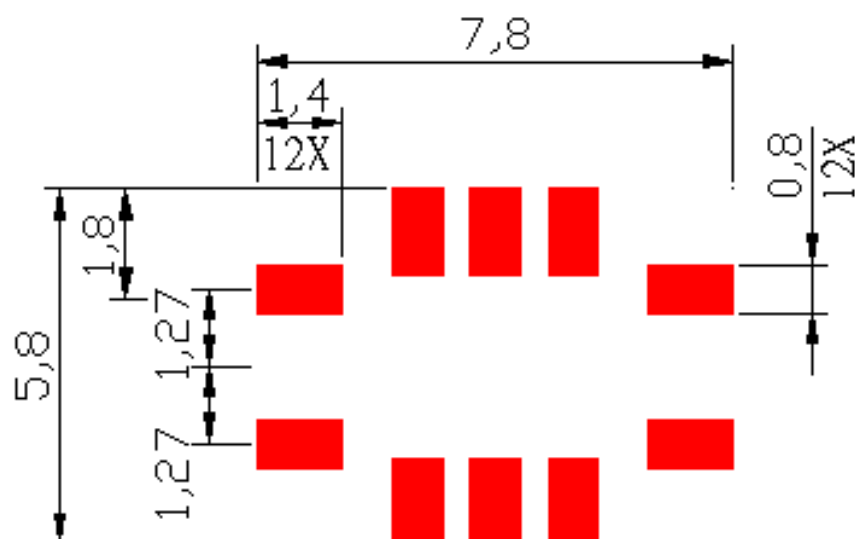

E. Frequency Characteristics :

(1) S21 Response

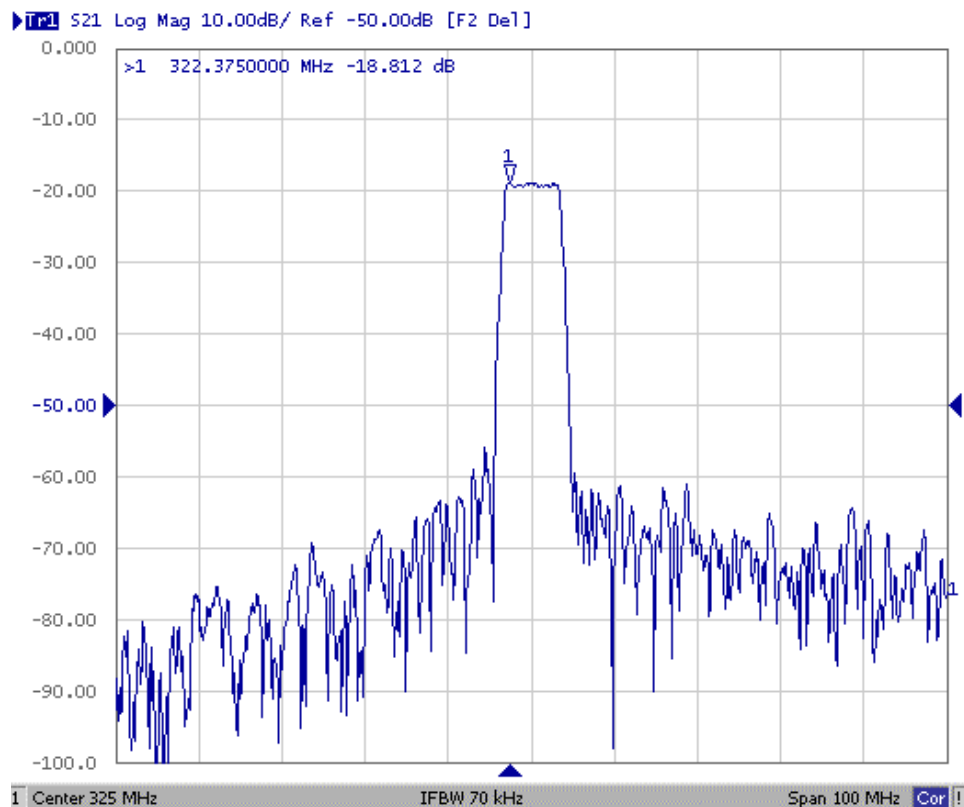


Fig1. Horizontal: 10MHz/Div Vertical: 10dB/Div

(2) Passband Ripple & Group Delay ripple


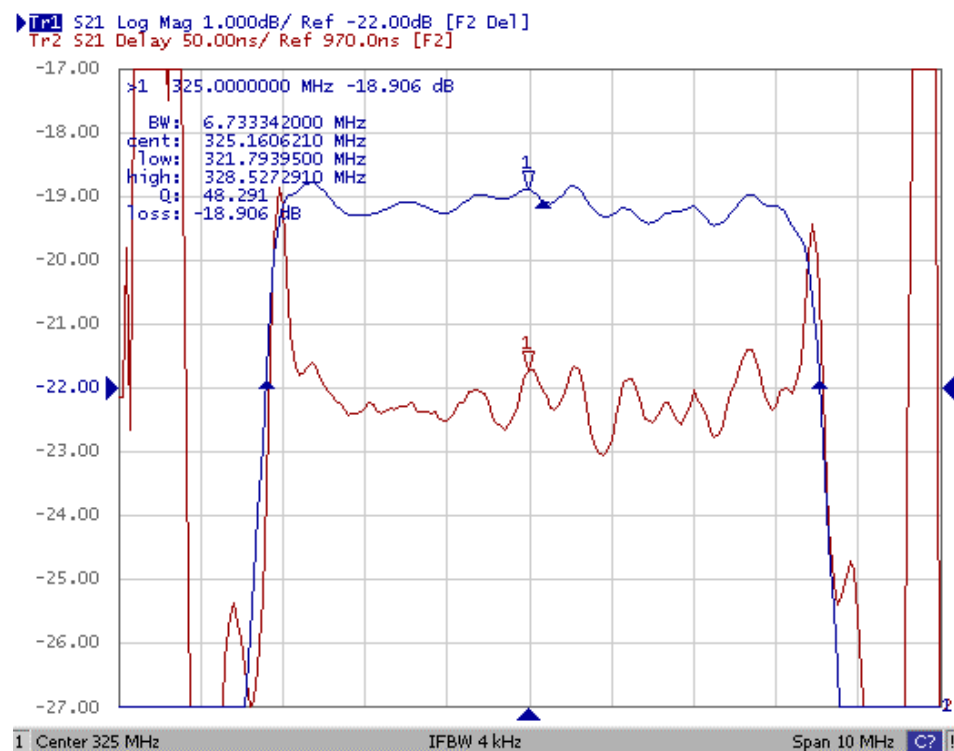


Fig2. Horizontal: 1MHz/Div Vertical: 1dB/Div
1MHz/Div Vertical: 50nS/Div


F. Outline Drawing:

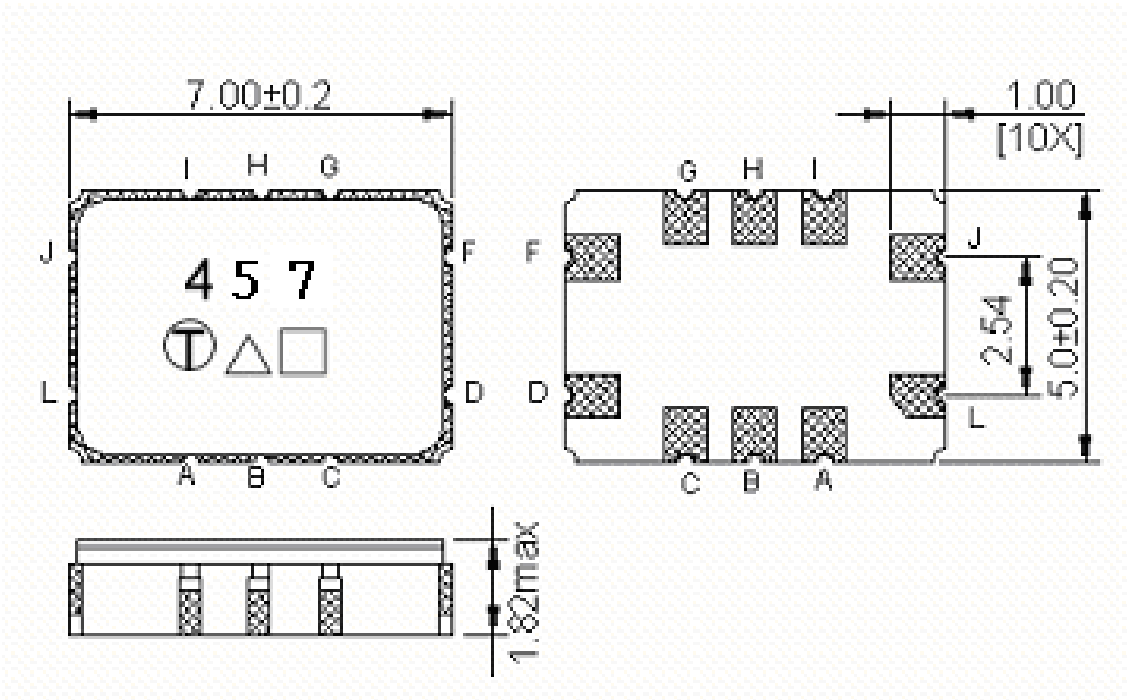

- Pin J,L : Balanced Input
Pin F,D : Balanced Output
Pin A,B ,C ,I,H,G : To be Ground
□ : Week Code (Follow the table from planner each year)
Unit : mm
△ : Product / Year Code


Year	2005 2009	2006 2010	2007 2011	2008 2012
Product Code	B	b	<u>B</u>	<u>b</u>

G. Footprint:

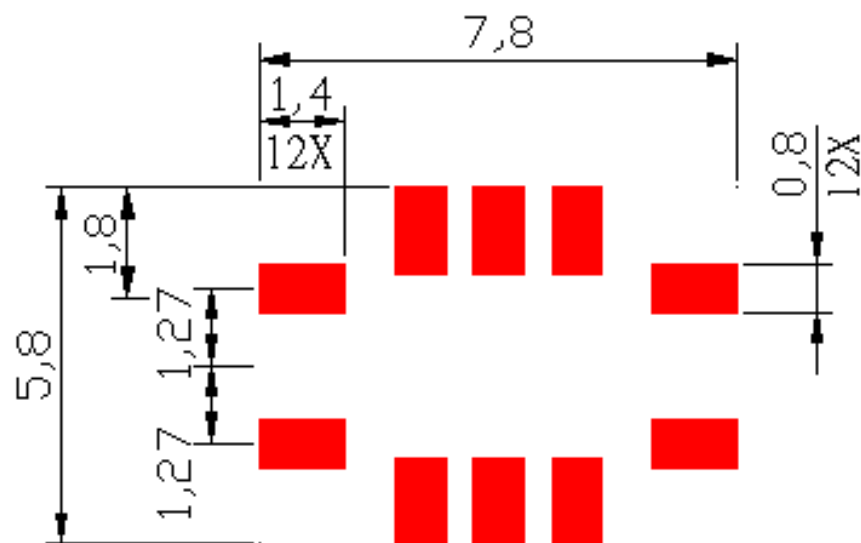

H. PACKING:

1. REEL DIMENSION

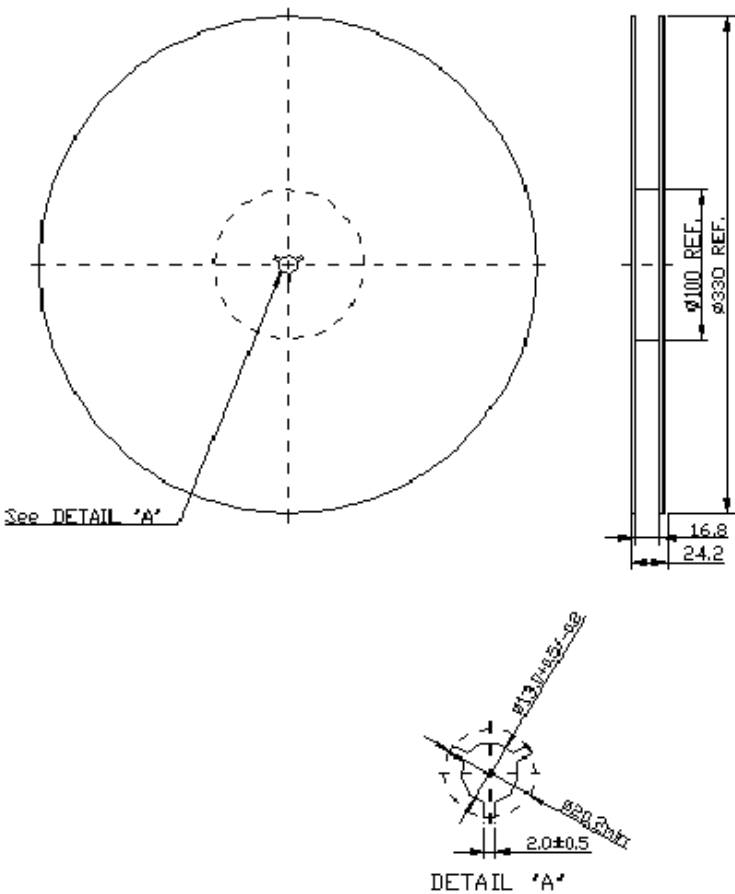

2. TAPE DIMENSION

