



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Issued Date: Oct, 24, 2013

Product Name: SAW Filter 918.6 MHz SMD 3.0x3.0 mm (BW=3.8MHz)

TST Parts No.:TA1628A

Customer Parts No.:_____

Company:_____
Division:_____
Approved by :_____
Date:_____

Checked by:_____ Paul Ni *Paul Ni*

Approval by:_____ Bob Chau *Bob Chau*

Date:_____ 10, 24, 2013

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 918.6 MHz

MODEL NO.:TA1628A

REV. NO : 1.0

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 6V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device


B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	918.6	-
3dB BW	MHz	-	5.0	-
Minimum insertion loss IL (min)				
Incl. loss of matching elements (Q=82) *1)	dB	-	2.7	4.2
Exclude loss in matching elements *2)	dB	-	2.5	4.0
Passband (relative to IL _{min}) *1)				
916.70 ~ 920.50 MHz	dB	-	1.2	3.0
Attenuation (relative to IL _{min}) *1)				
10.000 ~ 710.00 MHz	dB	45	52	-
710.00 ~ 850.00 MHz	dB	35	40	-
850.00 ~ 910.00 MHz	dB	20	27	-
910.00 ~ 914.00 MHz	dB	10	15	-
914.00 ~ 915.00 MHz	dB	5	12	-
923.00 ~ 930.00 MHz	dB	5	19	-
930.00 ~ 960.00 MHz	dB	17	29	-
960.00 ~ 1000.0 MHz	dB	28	35	-
1000.0 ~ 2500.0 MHz	dB	30	41	-
Turnover To	Deg.C	-	70	-
Temperature coefficient (TCf)	ppm/c*2	-	0.047	-
Impedance at Fc, Input Zin = Rin//Cin Zs	Ω	62 Ω//1.35pF		
Impedance at Fc, Output Zout = Rout//Cout ZL	Ω	58 Ω//1.44pF		

*1) : The matching circuit is real by actual passive components.
0805 Coilcraft CS series chip conductor is used for inductor.
0402 muRata GRM series is used for capacitor.


*2) : The matching circuit is ideal by simulation.

C. Frequency Characteristics :

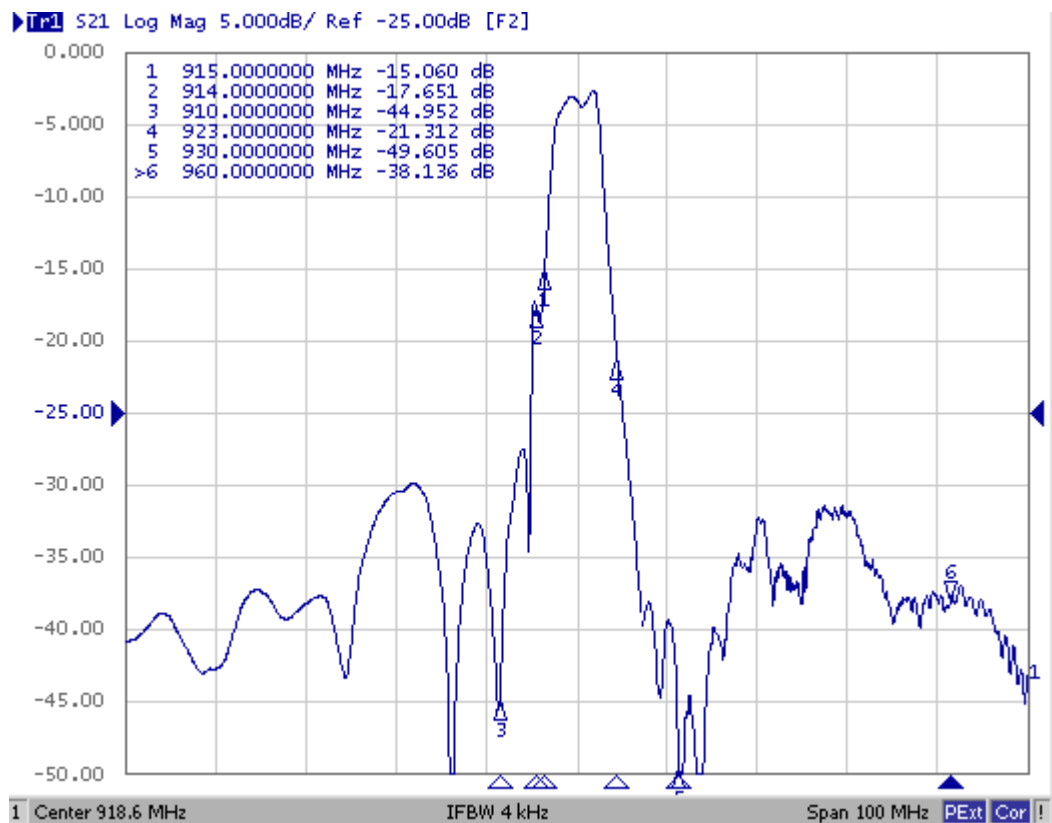


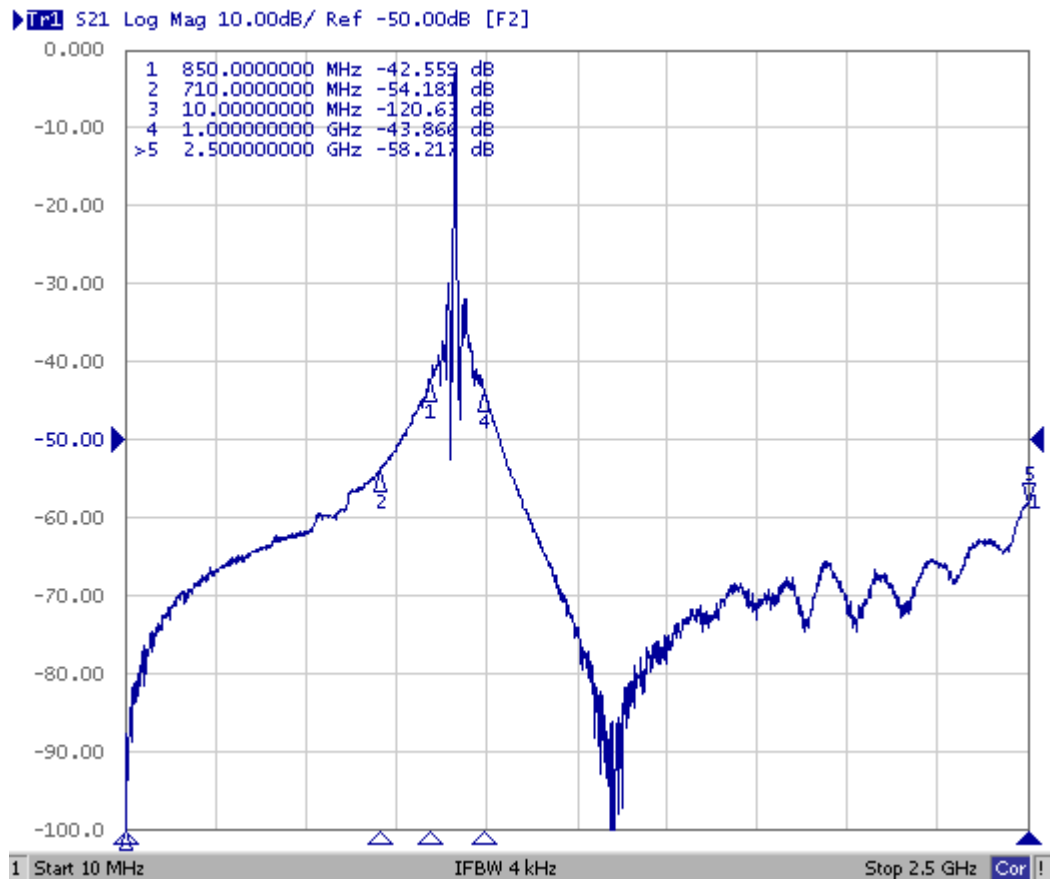

Smith Chart S11 :

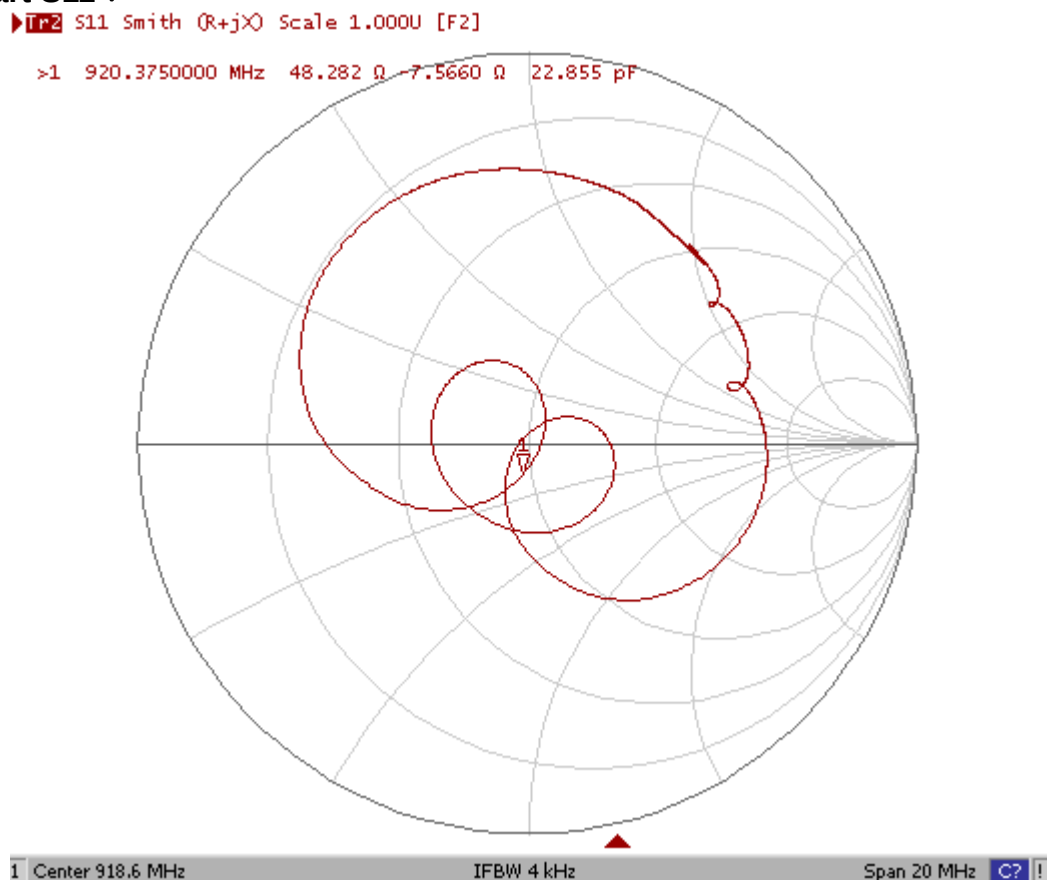


Smith Chart S22 :

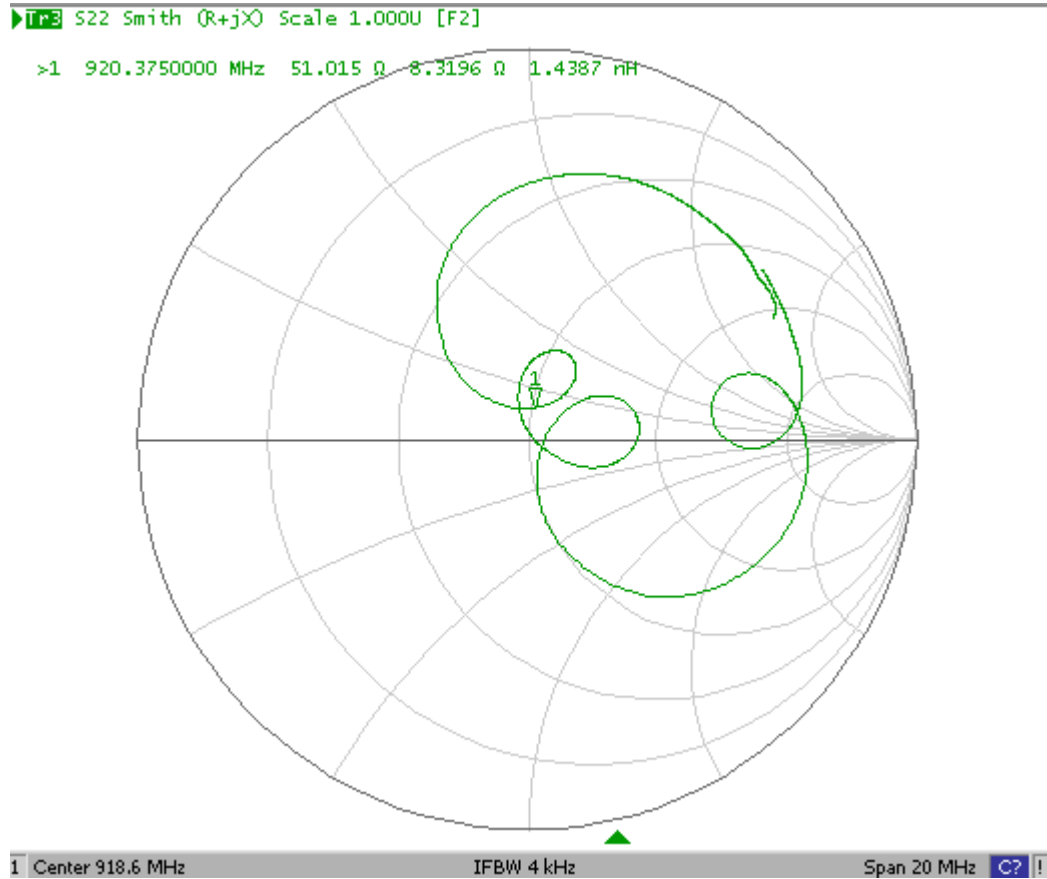

D. MEASUREMENT CIRCUIT:

The matching circuit is real by actual passive components.

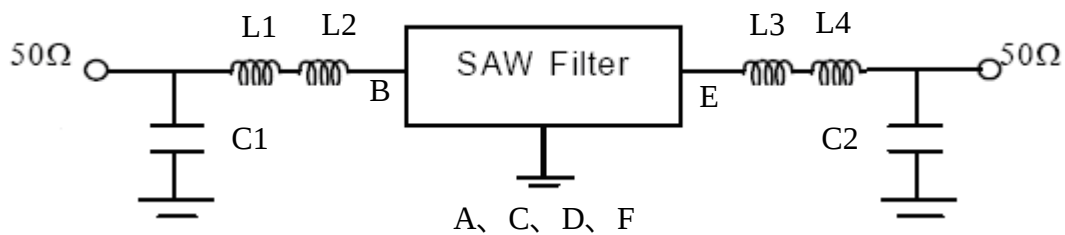


L1 : 10nH , L2 : 8.2nH , L3 : 8.2nH , L4 : 10nH

L1+L2=18.2nH ; L3+L4=18.2nH

C1 : 4.7 pF , C2 : 4.0pF

E.OUTLINE DRAWING:

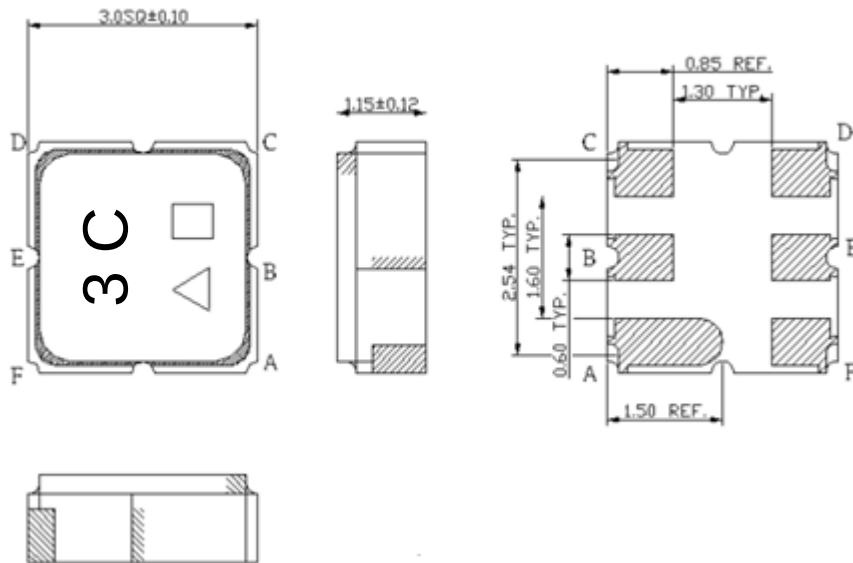

A : Input ground (recommended) or Input
 B : Input (recommended) or Input ground
 D : Output ground (recommended) or Output
 E : Output (recommended) or Output ground
 C、F: Case Ground

Δ : Year Code


$\square$: Data Code(Follow the table provided by planer each year)

Unit : mm

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

*3) The recommended pin configuration offers better suppression of electrical crosstalk.


F. PCB Footprint:

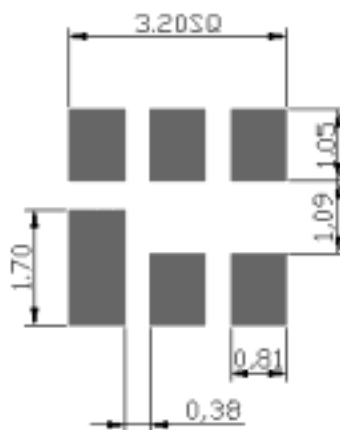


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

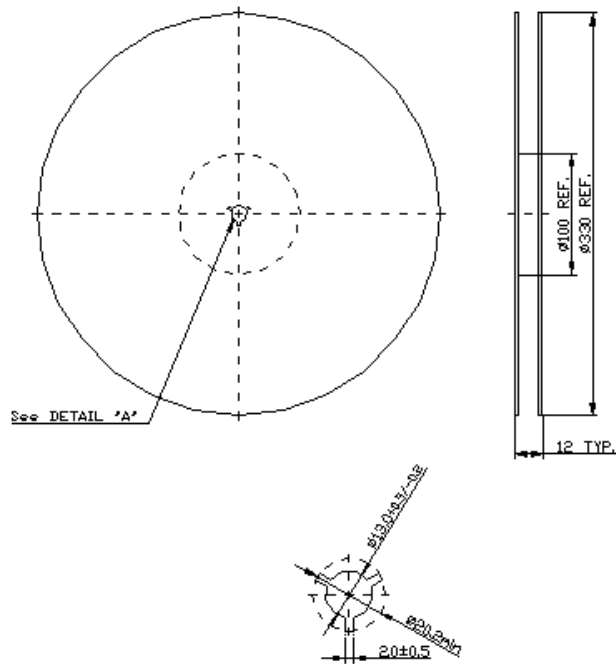

2. TAPE DIMENSION

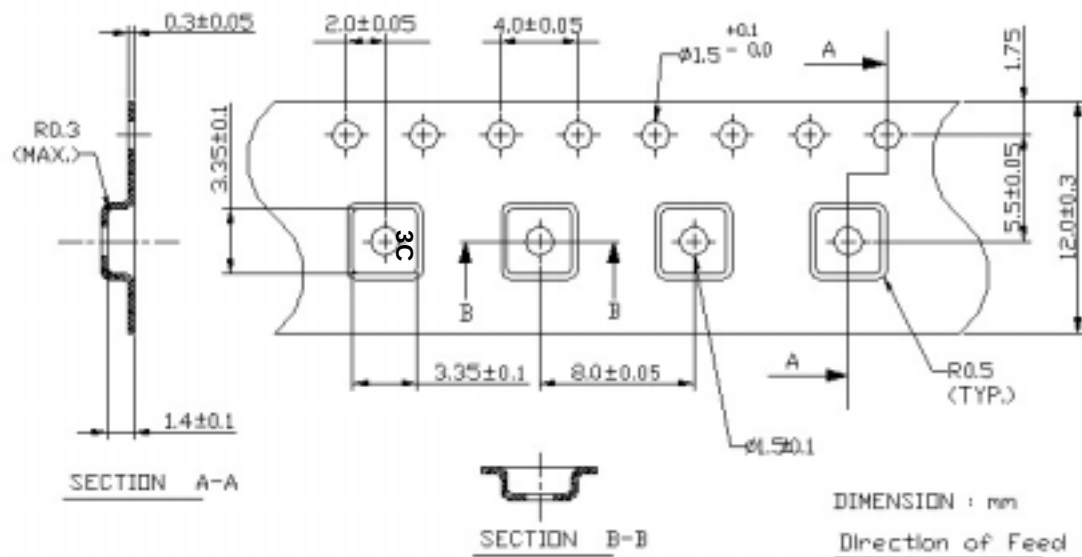

H. RECOMMENDED REFLOW PROFILE :

