
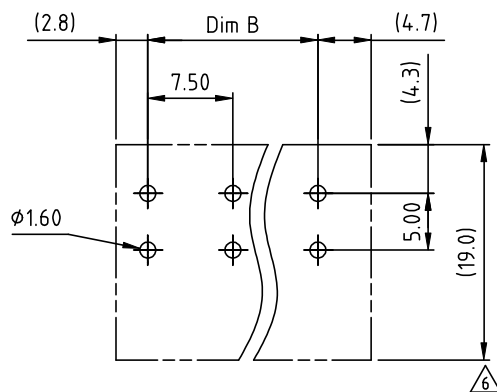
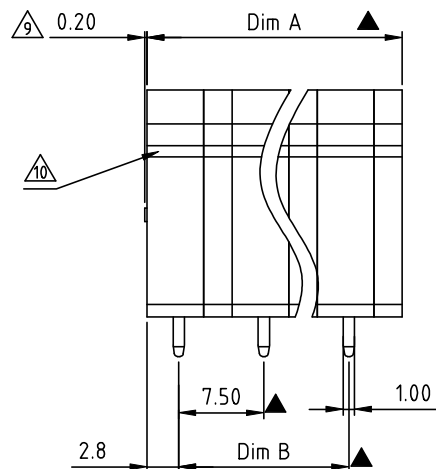


RoHS Compliant

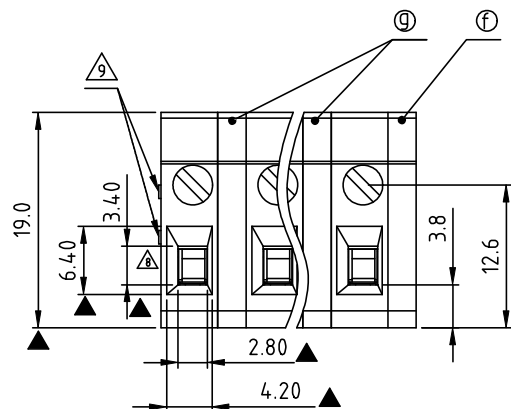


P.C.B LAYOUT

TR xx 25 x 0 xxxx G

02 2Poles
03 3Poles
...
16 16Poles

Color

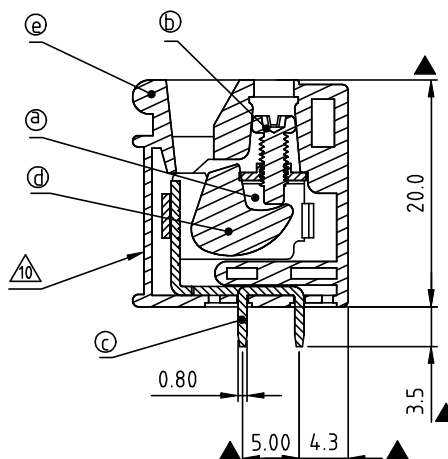0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
C Green(RAL 6018/U)G RoHS compliant
(lead<4%)
In copper Alloy0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

N = Number of poles

Dim A=Nx7.5

Dim B=(N-1)x7.5

	Dim A	Dim B
2-6p	±0.20	±0.20
7-12p	±0.30	±0.30
13-16p	±0.40	±0.40

REV	SIGN	DATE	DESCRIPTION	APPROVER
C	△	11.01'05	Standard spec is changed.	Marivn
D	△	02/01'07	Soldering temperature is changed from 245°C to250°C	Marivn
E	△	04/15'10	12Poles to 16Poles	Tason
F	△	08/25'10	Add the tolerance table	Tason
	△	08/25'10	Operating tem. changed from -30° +105° to -40° +115°	Tason
	△	08/25'10	Dim 15.2 TO 19.0	Tason
	△	08/25'10	Add the Measuring Symbol	Tason
G	△	03/29'10	The wire inlet is changed.	Tason
H	△	07/12-18	Add two cylinder	Chen Bo
	△	07/12-18	Change the view	Chen Bo
	△	07/12-18	Add RoHS Compliant	Chen Bo
	△	07/12-18	Some text content has been modified	Chen Bo
	△	07/12-18	Change the symbol of critical dimension	Chen Bo

△2 Material

- Item① Clamp: steel Zinc plating
- Item② Terminal screw: Steel Zinc plating "-" slot type
- Item③ Terminal: Brass,Tin plated
- Item④ Clampage:Steel Zinc plated
- Item⑤ Terminal (housing): Thermoplastic (UL94V-0)
- Item⑥ Cover: Thermoplastic (UL94V-0)
- Item⑦ Terminal (Board): Thermoplastic (UL94V-0)

△1 Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 2.4
- Screw: M2.5
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ▲

Amphenol
ANYTEK**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TR 7.5 Series Vertical (90D wire inlet)				
PART NO.		TRxx25x0xxxxG		DWG NO.	8TR0102	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Chen Bo 07/12-18	Chen Bo 07/12-18		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	REV.: H
						X.XX ±0.10
						X° ±1°