
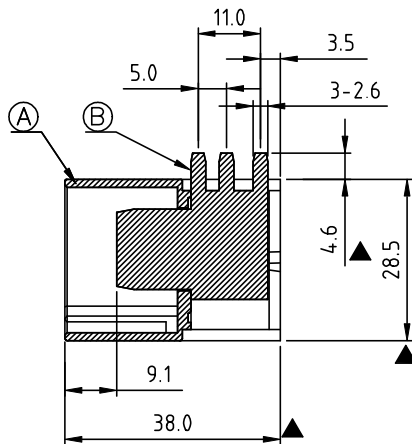
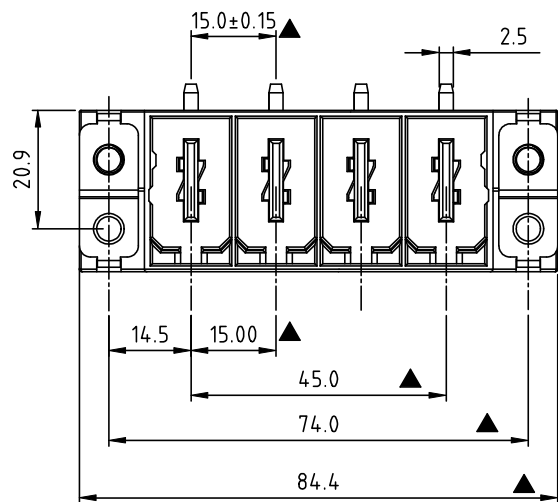
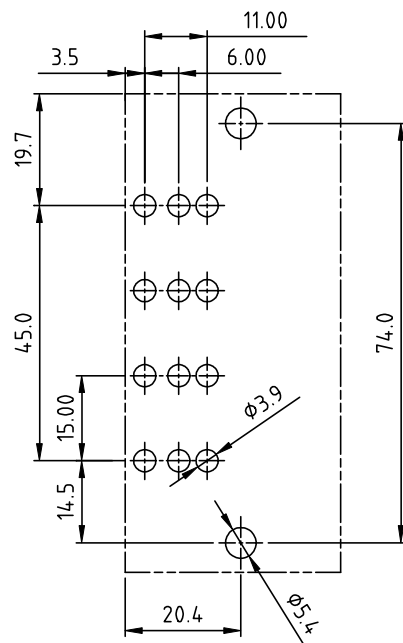


RoHS Compliant

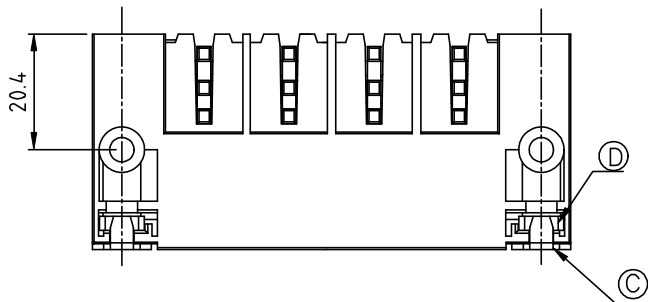

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		05/03-11	Initial release	Runner
C	△	05/13-20	Add RoHS Compliant, and Amphenol Logo	Chen Bo
	△	05/13-20	Change the symbol of critical dimension	Chen Bo
	△	05/13-20	add cULus safety certification mark	Chen Bo
	△	05/13-20	add the colour code,	Chen Bo
	△	05/13-20	update the wave soldering temperature	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal housing: PBT (UL94V-0)
- Item ② Male contact : Copper. Gold plated.
- Item ③ Contact : Brass ,Tin Plated.
- Item ④ With flange nut: Steel zinc plated.

Electrical: cULus

- Voltage rating: 600 V
- Current rating: 115 A
- Withstanding Voltage: 2.2 KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec



● APPROVAL: cULus

● Critical dimension: ▲

KU 04 C 2 x 1 xxxx G

No. OF POLES
04: 4 POLESG RoHS compliant
(lead<4%)
In copper Alloy

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

0000: "@ Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.**Amphenol
ANYTEK****CUSTOMER COPY**ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		KU 15.0mm Body Series (Right angle) W/F and shield feed-through on the inside of the device			
PART NO.	KU04C2x1xxxxG			DWG NO.	8KU0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 05/13-20	Chen Bo 05/13-20		Tolerance
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: C	X° ±1°