
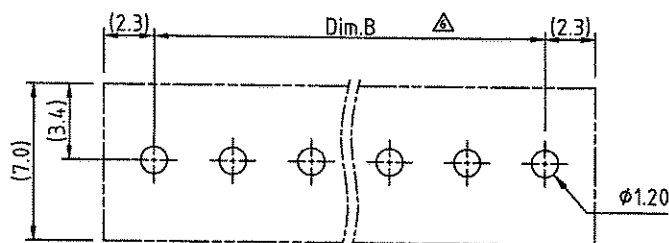
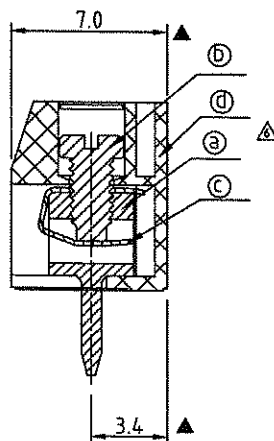
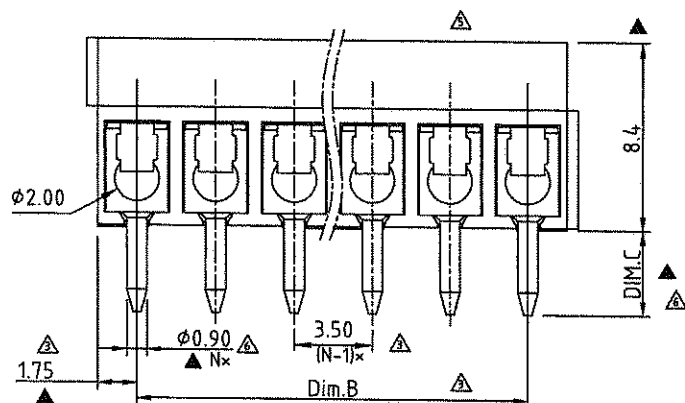


RoHS Compliant

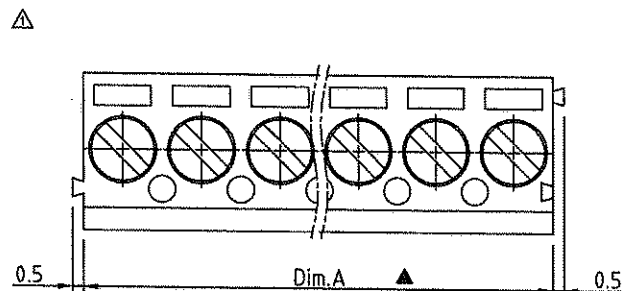

P.C.B. LAYOUT
TOP VIEW

POLE		4	5	6	7	8	9	10	11	12		
Dim.A		14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00		
Dim.B		10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50		
Tol.		±0.10				±0.15						
POLE	13	14	15	16	17	18	19	20	21	22	23	24
Dim.A	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00
Dim.B	42.00	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50
Tol.		±0.20						±0.30				

REV.	SIGN	DATE	DESCRIPTION	APPROVER
	△	2018.08.10	Add the RoHS Compliant, Replace the drawing frame.	Guoxue
	△	2018.08.10	Add the UL&CSA, Add the critical dimension	Guoxue
	△	2018.08.10	Add the dimension.	Guoxue
	△	2018.08.10	Add "Wave Soldering temperature is change from 245°C±10°C/5 Sec to 260°C±5°C/5 Sec	Guoxue
	△	2018.08.10	Delete the dimension.	Guoxue
	△	2018.08.10	Update the drawing	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Terminal body (metal housing): Brass (CuZn), Tin plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Wire guard: stainless steel
- Item ④ Insulator (housing): Thermoplastic (UL94V-0)

Electrical UL / CSA

- Voltage rating: 125V/125V
- Current rating: 10A/10A
- Wire range:
- Solid wire (AWG): 16-26 / 16-26
- Stranded wire (AWG): 16-26 / 16-26
- Torque: 1.7Lb-In/4kgf.cm
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.25KV/1.25KV
- Operating temperature: -40°C to +115°C
- Wave Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: △



TE xx 0 1 x x xxxx G

No. OF POLES
04: 4 POLES
24: 24 POLES

Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
C Green (RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

DIM C
3: 4.4mm
4: 3.8mm
5: 3.5mm

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TE 3.5mm Solid block series "-" Screw													
PART NO.	TExx01xxxxxxG						DWG NO.	8TE0103						
APPROVED	CHECKED		DESIGNED		DRAWN		CUST NO.							
			Guoxue		Guoxue			UNIT: mm		Tolerance				
	2018.08.10		2018.08.10					SCALE: NONE		X.X ±0.50		X.XX ±0.30		
								REV.: C		X* ±1*				
SHEET: 01/01														