
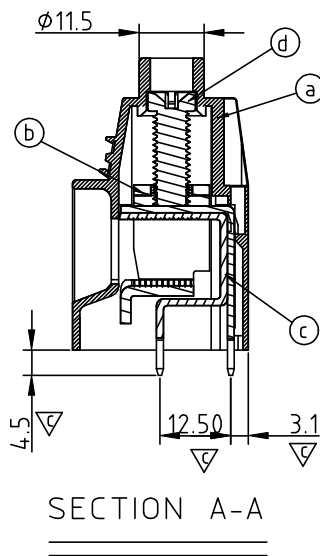
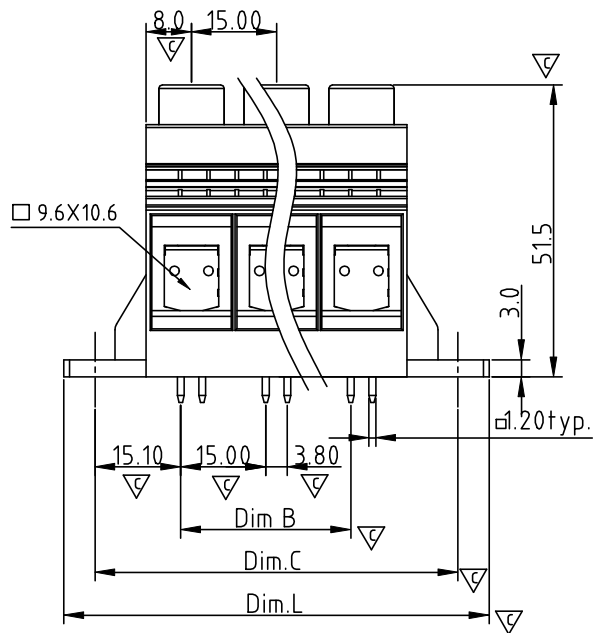
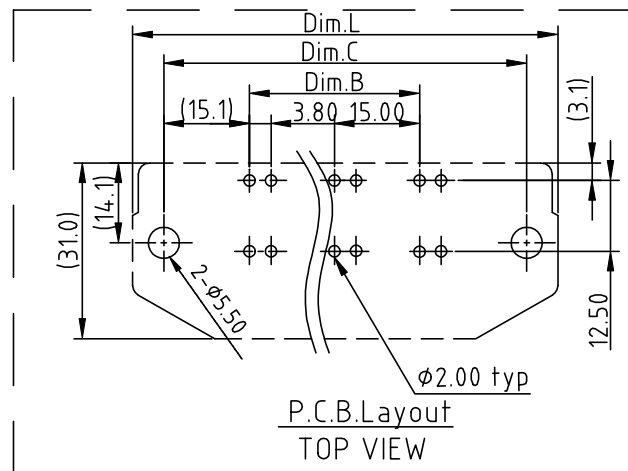


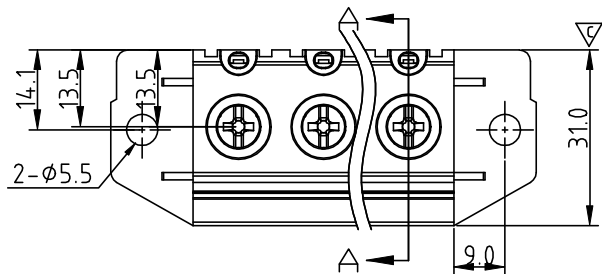

Dimension L&B&C

DIM B	(N-1)×15.0
DIM C	(N-1)×15.0+34.0
DIM L	(N-1)×15.0+45.0

N=Number of poles

Poles	L&B Tolerance
1P-2P	±0.30
2P-4P	±0.50
5P-10P	±0.80

SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal housing :Thermoplastic (UL 94V-0)
- Item ② Clamp : Steel Stamping , Zinc plated
- Item ③ Wire guard solder pin : Copper , Tin plated
- Item ④ Terminal screw: Steel Zinc plating "+/-" slot type
- Electrical Use group B&C Use group D
- Voltage rating: 600V 600V
- Current rating: 127A 5A
- Wire range: 1-20
- Torque: Lb-In (N.m): 34-36.5 (3.8-4.1)
- Screw: M6
- Wire strip length: 19-20mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40° C to +115° C
- Soldering temperature: 260° C±5° C/5 Sec
- Safety Approval: CE, RoHS
- Critical dimension: ∇

K9 xx C3 x 31 xxx G

POLES
01 01 POLES
02 02 POLES
03 03 POLES
...
10 10 POLES

0 Black
2.Red
3.Orange
4.Yellow
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7004/P)
9 White
C: Green(RAL 6018/U)

000:"@ "Logo (Standard)
00A:"ANYTEK"Logo
Any special item by
customer request,
please contact sales
department.

G RoHS compliant
(lead<4%)
In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K9 15.0 Series With flange (Double-handed)" + "/" slot type						
PART NO.	K9xxC3x31xxxG			DWG NO.	8K90006		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2014.03.10	Guoxue 2014.03.10		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
							X.XX ±0.10
				SHEET: 01/01		REV.: B	X* ±1*