
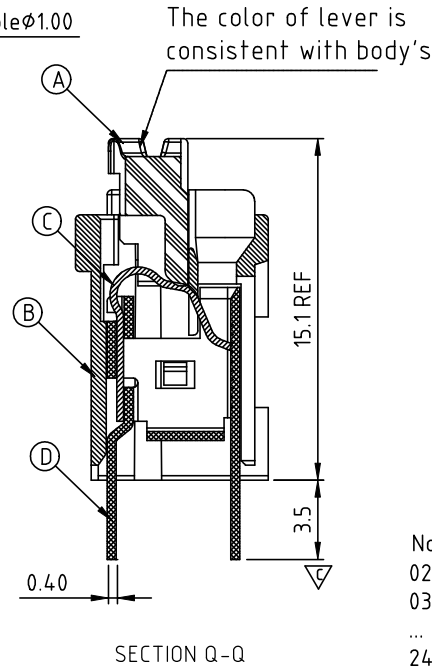
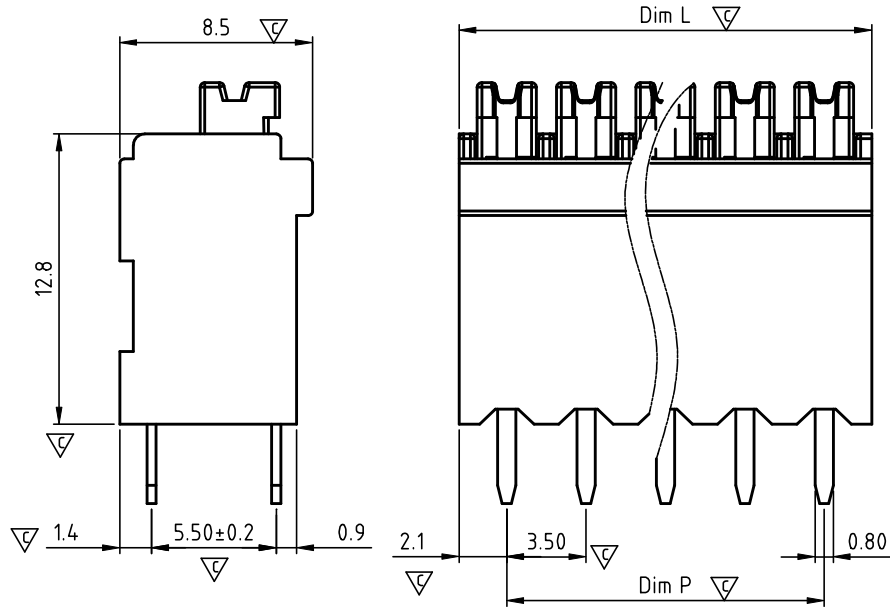


SIGN	DATE	DESCRIPTION	APPROVER
△	01/21/13	change the electrical specification	Da cheng
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

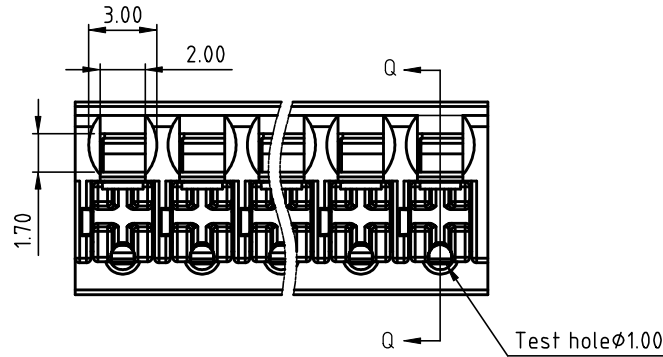

Material:

- Item ① Lever: Thermoplastic (UL 94V-0)
- Item ② Terminal housing: Thermoplastic (UL 94V-0)
- Item ③ Wire guard: Stainless steel
- Item ④ Solder Pin: Brass.Tin plated


- △ Electrical: cULus
- Voltage rating: 300 V
 - Current rating(SOL): 7 A
 - Current rating(STR): 10 A
 - Wire range:
 - Solid wire(AWG): 18-24
 - Stranded wire(AWG): 16-22
 - Wire strip length: 12-13 mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval:
 - Critical dimension:

NM xx 1 0 x 0 Axxx G

No. OF POLES
02 2 CONTACTS
03 3 CONTACTS
...
24 24 CONTACTS

Color
0 Black (RAL9005)
3: Orange (RAL 2011/P)
5: GREEN (RAL 6018/T)
6: Blue (RAL5015/A)
8: GREY (RAL 7004/P)

RoHS compliant
(lead<4%)
In copper Alloy
A000: "@" Logo (Standard
A00A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

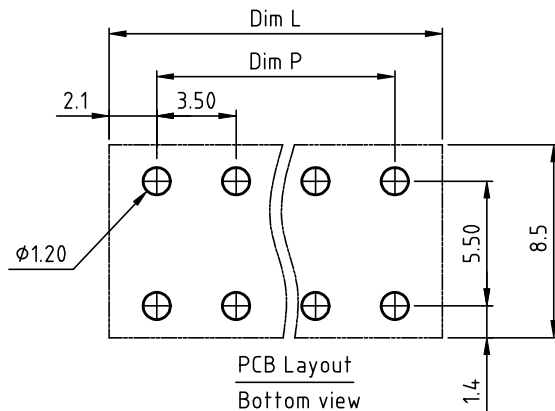

N=NUMBER OF CONTACTS

DIM		TOL			
		2P--6P	7P--12P	13P--18P	19P--24P
Dim L	N×3.5+0.70	±0.15	±0.20	±0.30	±0.40
Dim P	(N-1)×3.5	±0.15	±0.20	±0.30	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NM 3.5 Series Vertical 90° wire inlet			
PART NO.	NMxx10x0AxxxG			DWG NO.	8NM0101
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Da cheng 2013.01.21	Da cheng 2013.01.21		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
				SHEET: 01/01	REV.: B