



5NM70A-U2

Preliminary

Power MOSFET

5A, 700V N-CHANNEL SUPER-JUNCTION MOSFET



■ DESCRIPTION

The UTC **5NM70A-U2** is a Super Junction MOSFET Structure and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and high rugged avalanche characteristics. This power MOSFET is usually used in high speed switching applications at power supplies, PWM motor controls, high efficient AC to DC converters and bridge circuits.

■ FEATURES

- * $R_{DS(ON)} \leq 1.8 \Omega$ @ $V_{GS} = 10V$, $I_D = 2.5A$
- * Fast Switching Capability
- * Improved dv/dt Capability, High Ruggedness

■ SYMBOL

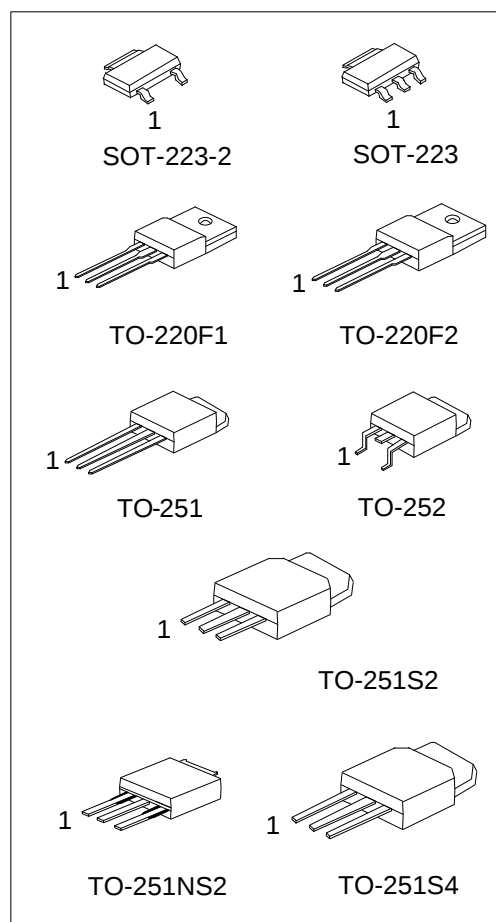

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
5NM70AL-AA2-R	5NM70AG-AA2-R	SOT-223-2	G	D	S	Tape Reel
5NM70AL-AA3-R	5NM70AG-AA3-R	SOT-223	G	D	S	Tape Reel
5NM70AL-TF1-T	5NM70AG-TF1-T	TO-220F1	G	D	S	Tube
5NM70AL-TF2-T	5NM70AG-TF2-T	TO-220F2	G	D	S	Tube
5NM70AL-TM3-T	5NM70AG-TM3-T	TO-251	G	D	S	Tube
5NM70AL-TMS2-T	5NM70AG-TMS2-T	TO-251S2	G	D	S	Tube
5NM70AL-TMS4-T	5NM70AG-TMS4-T	TO-251S4	G	D	S	Tube
5NM70AL-TMN2-T	5NM70AG-TMN2-T	TO-251NS2	G	D	S	Tube
5NM70AL-TN3-R	5NM70AG-TN3-R	TO-252	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

5NM70AG-AA2-R (1) Packing Type (2) Package Type (3) Green Package	(1) T: Tube, R: Tape Reel (2) AA2: SOT-223-2, AA3: SOT-223, TF1: TO-220F1, TF2: TO-220F2, TM3: TO-251, TMS2: TO-251S2, TMS4: TO-251S4, TN3: TO-252, TMN2: TO-251NS2 (3) G: Halogen Free and Lead Free, L: Lead Free
---	--

■ MARKING

SOT-223-2 / SOT-223	TO-220F1 / TO-220F2 / TO-251 / TO-251S2 / TO-251S4 / TO-252 / TO-251NS2

■ **ABSOLUTE MAXIMUM RATINGS** ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT
Drain-Source Voltage			V _{DSS}	700	V
Gate-Source Voltage			V _{GSS}	±30	V
Drain Current	Continuous	T _C =25°C	I _D	5.0	A
		T _C =100°C		3.4	A
	Pulsed (Note 2)		I _{DM}	20	A
Avalanche Energy	Single Pulsed (Note 3)		E _{AS}	116	mJ
Peak Diode Recovery dv/dt (Note 4)			dv/dt	3.0	V/ns
Power Dissipation	SOT-223-2/SOT-223		P _D	8	W
	TO-220F1/TO-220F2			30	W
	TO-251/TO-251S2			48	W
	TO-251S4/TO-251NS2 TO-252				
Junction Temperature			T _J	+150	°C
Storage Temperature			T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by maximum junction temperature.

3. $L=144\text{mH}$, $I_{AS}=1.27\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\ \Omega$, Starting $T_J = 25^\circ\text{C}$

4. $I_{SD}\leq 5.0\text{A}$, $di/dt\leq 200\text{A}/\mu\text{s}$, $V_{DD}\leq BV_{DSS}$, Starting $T_J = 25^\circ\text{C}$

■ **THERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223-2/SOT-223	θ_{JA}	150	$^\circ\text{C/W}$
	TO-220F1/TO-220F2		62.5	$^\circ\text{C/W}$
	TO-251/TO-251S2		110	$^\circ\text{C/W}$
	TO-251S4/TO-251NS2			
	TO-252			
Junction to Case	SOT-223-2/SOT-223	θ_{JC}	15.6	$^\circ\text{C/W}$
	TO-220F1/TO-220F2		4.17	$^\circ\text{C/W}$
	TO-251/TO-251S2		2.6	$^\circ\text{C/W}$
	TO-251S4/TO-251NS2			
	TO-252			


■ **ELECTRICAL CHARACTERISTICS** ($T_J = 25^\circ\text{C}$ unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	V _{GS} =0V, I _D =250μA	700			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =700V, V _{GS} =0V			1	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =30V, V _{DS} =0V			100	nA
	Reverse		V _{GS} =-30V, V _{DS} =0V			-100	
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2.5		4.5	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =2.5A			1.8	Ω
DYNAMIC CHARACTERISTICS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1.0MHz		250		pF
Output Capacitance		C _{OSS}			150		pF
Reverse Transfer Capacitance		C _{RSS}			14		pF
SWITCHING CHARACTERISTICS							
Total Gate Charge (Note 1)		Q _G	V _{DS} =50V, V _{GS} =10V, I _D =1.3A , I _G =100μA (Note 1, 2)		24		nC
Gate to Source Charge		Q _{GS}			3		nC
Gate to Drain Charge		Q _{GD}			7		nC
Turn-ON Delay Time (Note 1)		t _{D(ON)}	V _{DD} =30V, V _{GS} =10V, I _D =0.5A, R _G =25Ω (Note 1, 2)		40		ns
Rise Time		t _R			55		ns
Turn-OFF Delay Time		t _{D(OFF)}			120		ns
Fall-Time		t _F			30		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S				5	A
Maximum Body-Diode Pulsed Current		I _{SM}				20	A
Drain-Source Diode Forward Voltage (Note 1)		V _{SD}	I _S =5.0A, V _{GS} =0V			1.4	V
Body Diode Reverse Recovery Time (Note 1)		t _{rr}	I _S =5.0A, V _{GS} =0V,		310		ns
Body Diode Reverse Recovery Charge		Q _{rr}	dl _F /dt=100A/μs		3		μC


Notes: 1. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

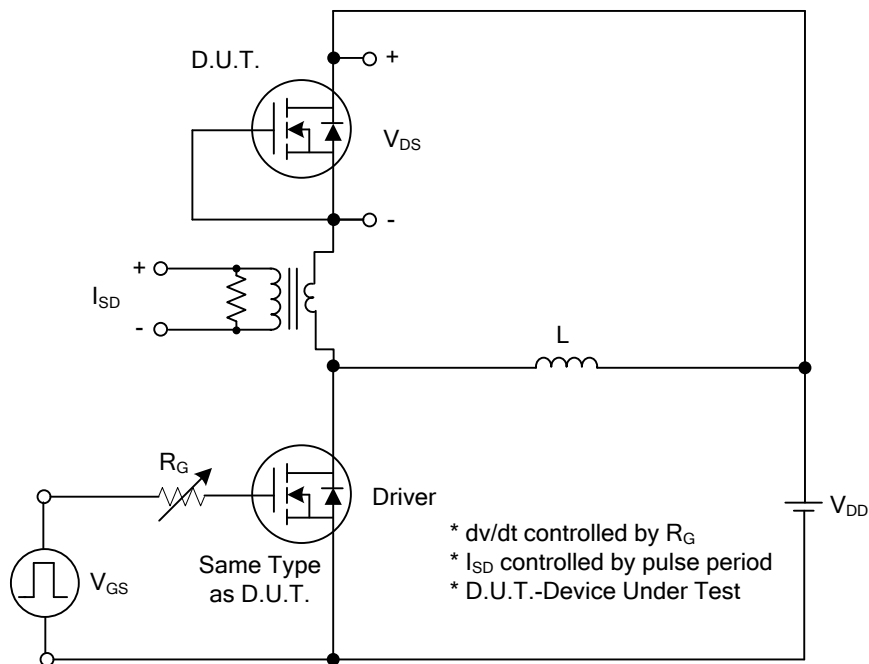


Peak Diode Recovery dv/dt Test Circuit

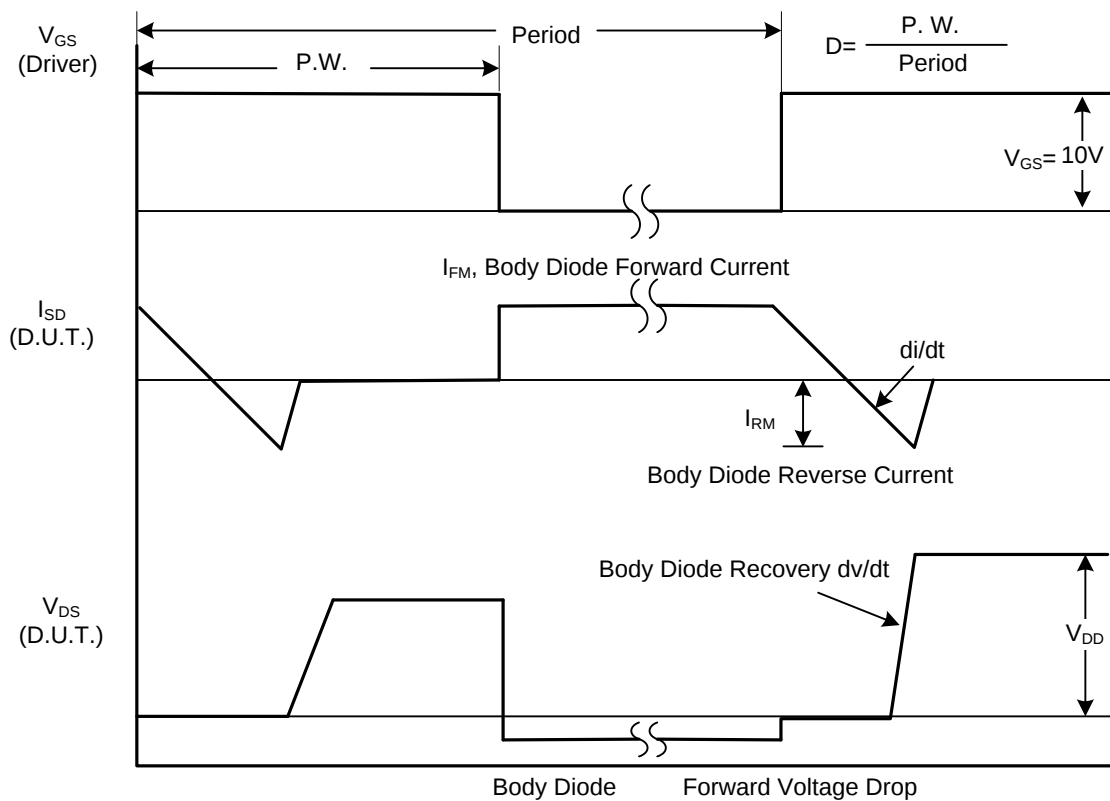


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS

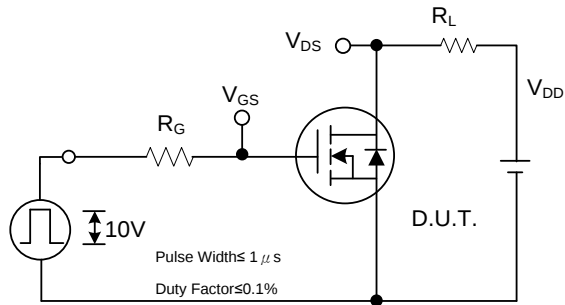


Switching Test Circuit

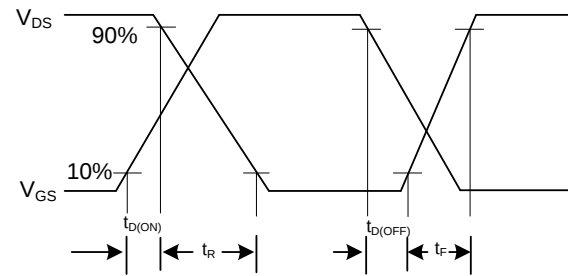


Switching Waveforms

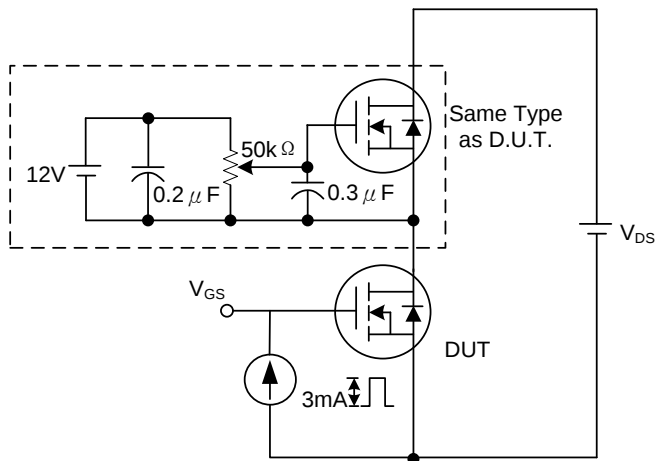


Gate Charge Test Circuit

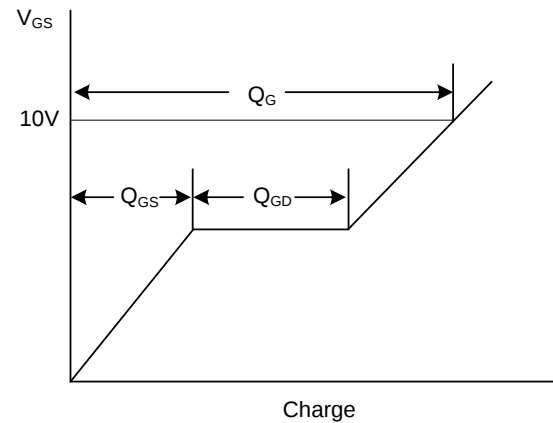

Gate Charge Waveform

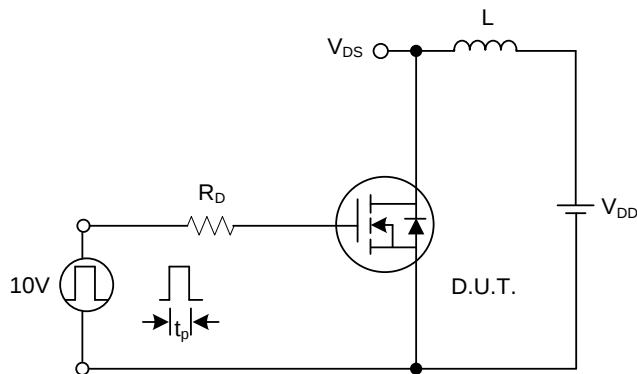

Unclamped Inductive Switching Test Circuit

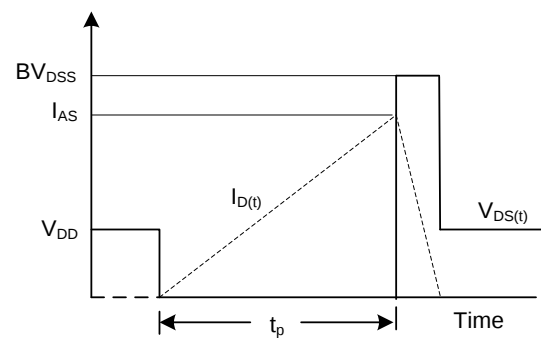

Unclamped Inductive Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.