

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/19/09'		

NOTES:

1. SPECIFICATIONS:

- 1.0 CONTACT RESISTANCE: 30mΩ max.
- 1.1 INSULATOR RESISTANCE: 1000MΩ min.AT DC 500V.
- 1.2 CURRENT RATING: 1.5A.
- 1.3 VOLTAGE RATING: 30V AC/DC.
- 1.4 DIELECTRIC STRENGTH: AC 500V FOR 1 Minute.

2. MATERIALS:

- 2.0 HOUSING: PBT+30% GLASS FIBER(UL 94-0).
- 2.1 CONTACT: COPPER ALLOY
- 2.2 SHELL: COPPER ALLOY.

3. PRODUCT NUMBER CODE:

DS1095-03-X X X X

CONTACT PLATING

- 0: Selective gold flash
- 03: Selective gold 3u"
- 30: Selective gold 30u"

MOUNTING TYPE




R: R/A

SHELL PLATING:

- N: Nickel
- 6: Tin

COLOR OF HOUSING:

- W: WHITE
- B: Black

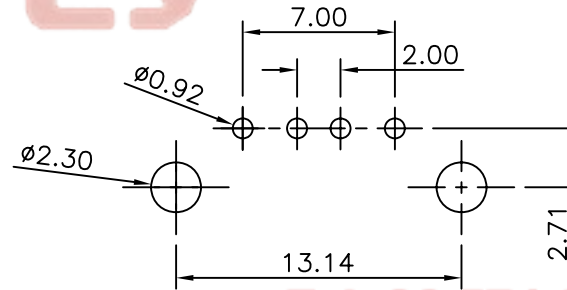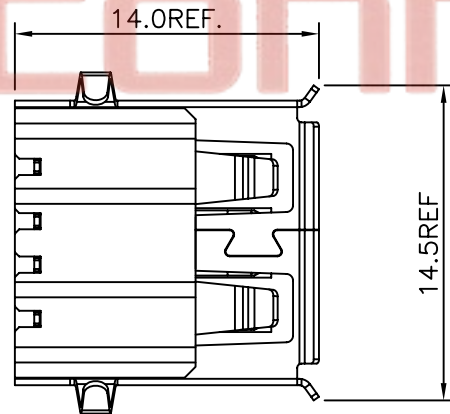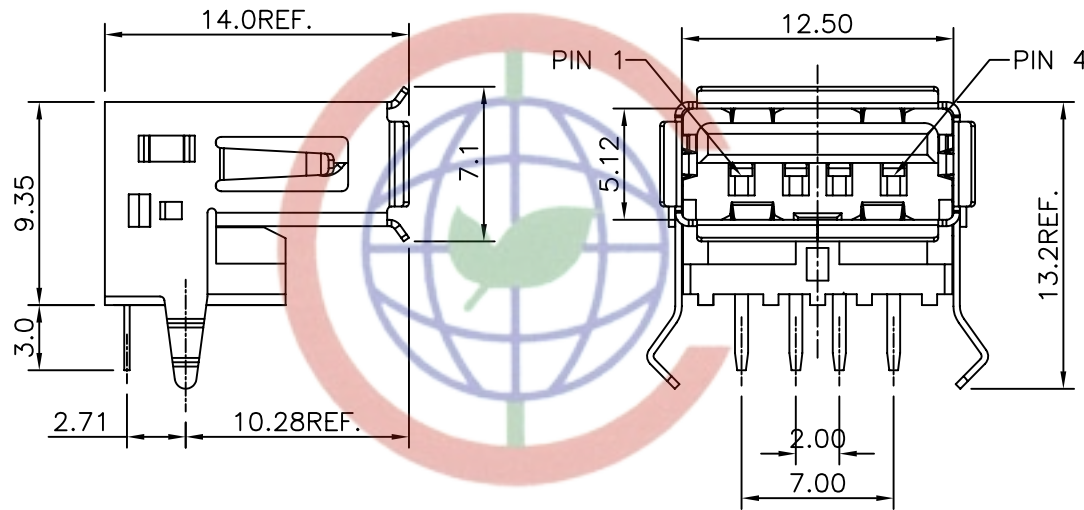

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB A TYPE FEMALE
X.	±0.60	X.	±5°	UNITS	mm		R/A H=9.35mm
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1095-03 SERIES
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1095-03-XXXX						



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD