


RoHS Compliant






Dimension A&B

DIM A	N×5.08
DIM B	(N-1)×5.08

N=Number of Poles



Poles	Dim.A Tol.
2P-8P	±0.15
9P-14P	±0.25
15P-20P	±0.35
21P-24P	±0.40

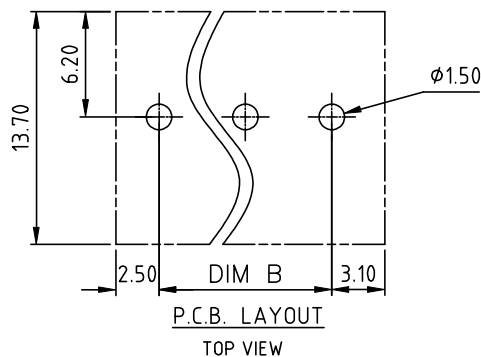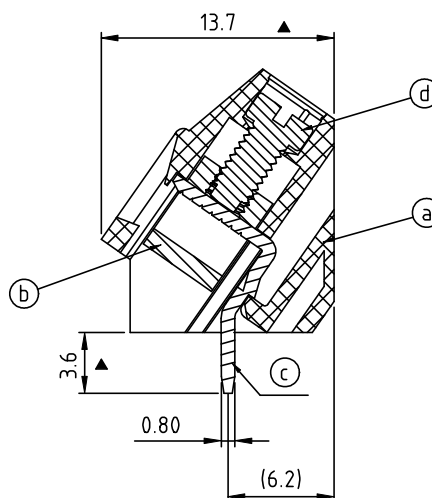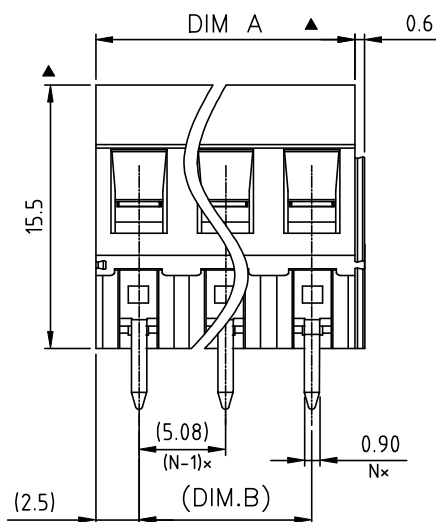

Material: ● Item① Terminal housing :Thermoplastic (UL 94V-0)
● Item② Clamp : Brass , Ni plated
● Item③ Wire guard solder pin : Brass , Tin plated
● Item④ Terminal screw: Steel Zinc plating"-slot type

Electrical UL

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Wave Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval Defa:

● Critical dimension: ▲

▲ ● Reference dimension: (×)The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

		T2 xx 2 1 x 1		xxxx G		
02	2 POLES	Color		0000:"@Logo (Standard)		RoHS compliant (lead<4%) In copper Alloy
03	3 POLES	0 Black (RAL9005)		000A:"ANYTEK"Logo		
...	...	2 Red (RAL3001/D)		Any special item by		
...	...	3 Orange(RAL2011/P)		customer request,		
24	24 POLES	4 Yellow(RAL1018/A)		please contact sales		
		5 Green(RAL6018/T)		department.		
		6 Blue (RAL5015/A)				
		8 Grey(RAL7035/D)				
		9 White(RAL1102)				
		C Green(RAL6018/U)				

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	T2 5.08 SERIES (2P-24P) Solid block						
PART NO.	T2xx21x1xxxxG 			DWG NO.	8T20201		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2020.09.08	Guoxue 2020.09.08		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
				SHEET: 01/01	REV: E		X.XX ±0.10
							X° ±1°