


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/26/16'	~	

NOTES:

- Electrical characteristics:
 - Contact resistance: 50mΩ Max.
 - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - Insulation resistance: 1000MΩ Min.
 - Current rating:1A.
- Environment characteristics:
 - Temperature: -20°C~+85°C.
- Materials
 - Contact material: Copper alloy.
 - Contact plating: Selective gold
 - Insulator materials: Thermoplastic,Black.
- Product Number Code:

DS1131-03 - X X X X X

Housing Materials
P:PBT
N:Nylon
Contact Plating
8:Gold Flash
Housing Color
B:Black
No.Of Contacts
8:8p8c
Connector Type
S:Socket

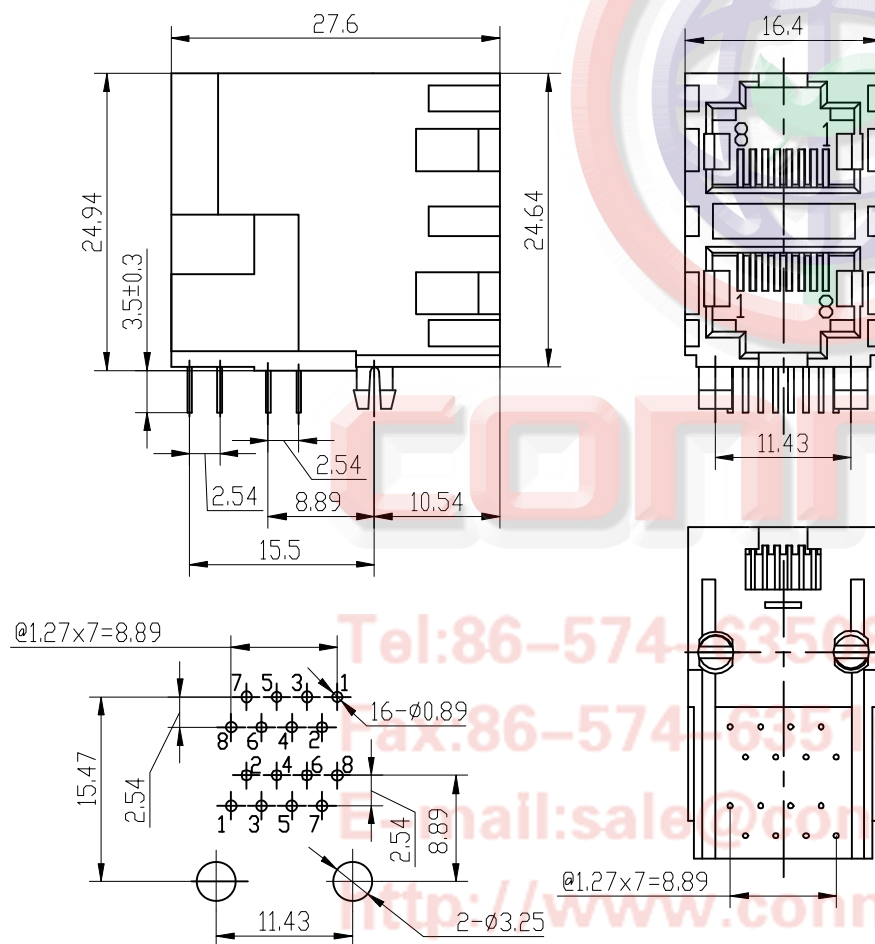

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	PCB Jack 8 Positions 2*1 Port W/O Shell Type	
X.	±0.60	X.	±5°	mm				
.X	±0.38	.X	±3°					
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		SHEET SIZE		SERIES		DS1131-03 SERIES
SCALE		1:1	SHEET	A4				
DRAWING NO.		C-DS1131-03-XXXXX-A						

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD