



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 781.5 MHz SMD 3.8X3.8 mm

TST Part No.: TA1017B

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 8, 4, 2009

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 781.5 MHz

MODEL NO.:TA1017B

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: 0°C to +60°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	781.5	-	-
Insertion loss (775~788 MHz) IL	dB	-	1.8	4	-
Bandwidth	MHz	13	28	-	-
Amplitude Ripple (775 ~ 788 MHz)	dB	-	0.3	1	-
Attenuation (Reference level from 0 dB)					
300 ~ 700 MHz	dB	28	59	-	-
728 ~ 757 MHz	dB	30	48	-	-
880 ~ 1050 MHz	dB	28	62	-	-
Temperature Coefficient of Frequency	Ppm/°C	-	-36	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

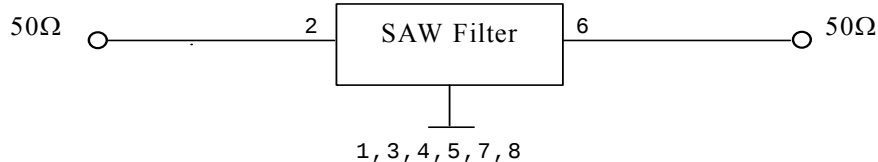

D.OUTLINE DRAWING:

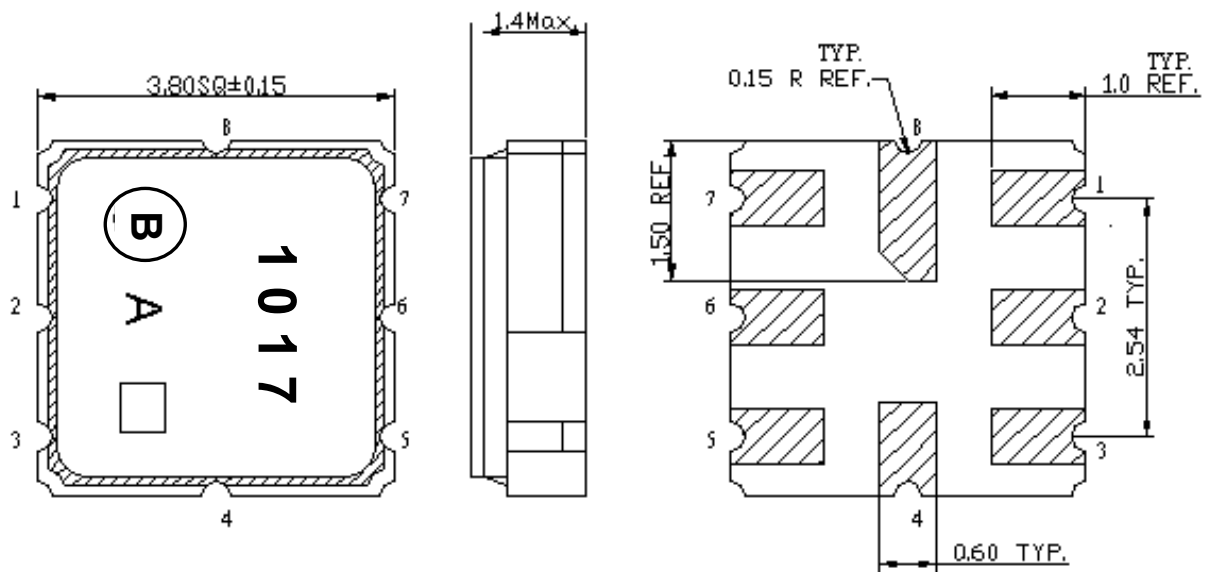

2 : Input


6: Output

1,3,4,5,7,8: Ground



□ : Date Code (W01->A, W02->B,...W52->z)

Unit: mm

E. PCB Footprint:

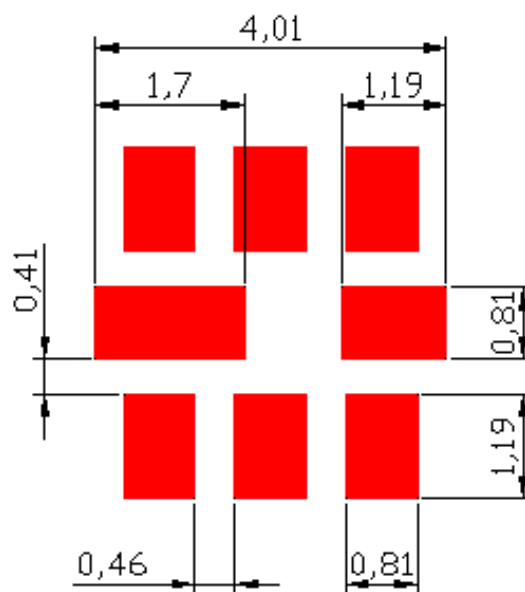


F. Frequency Characteristics :

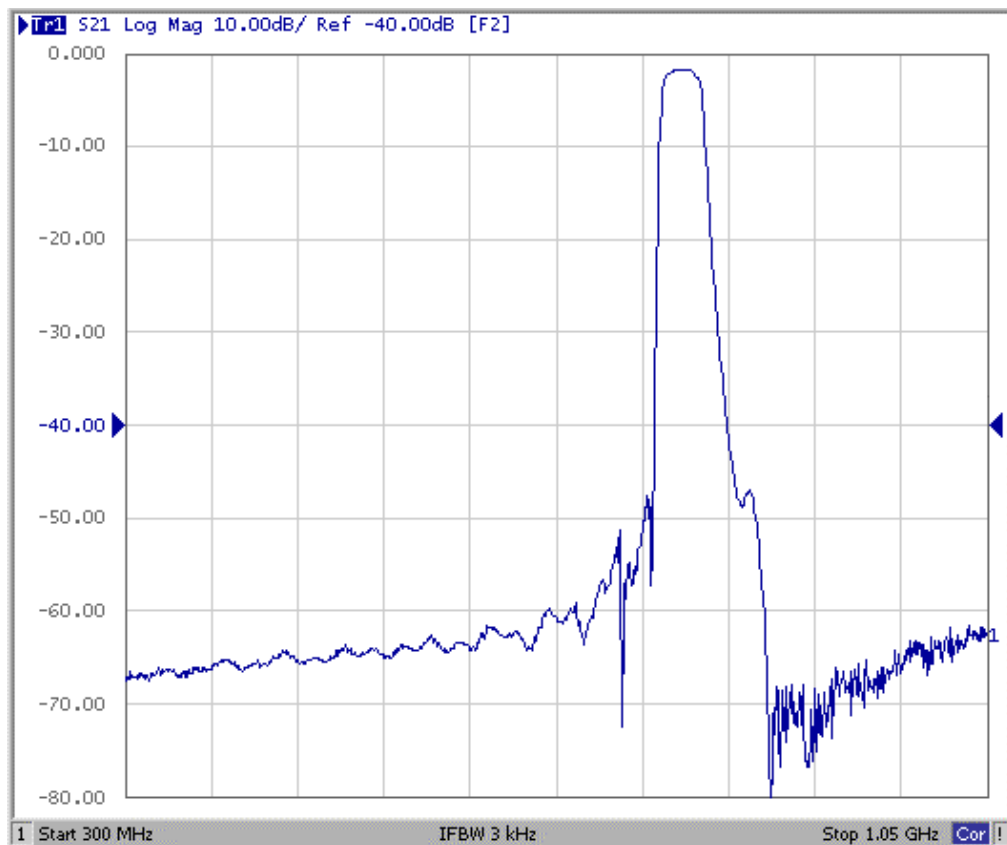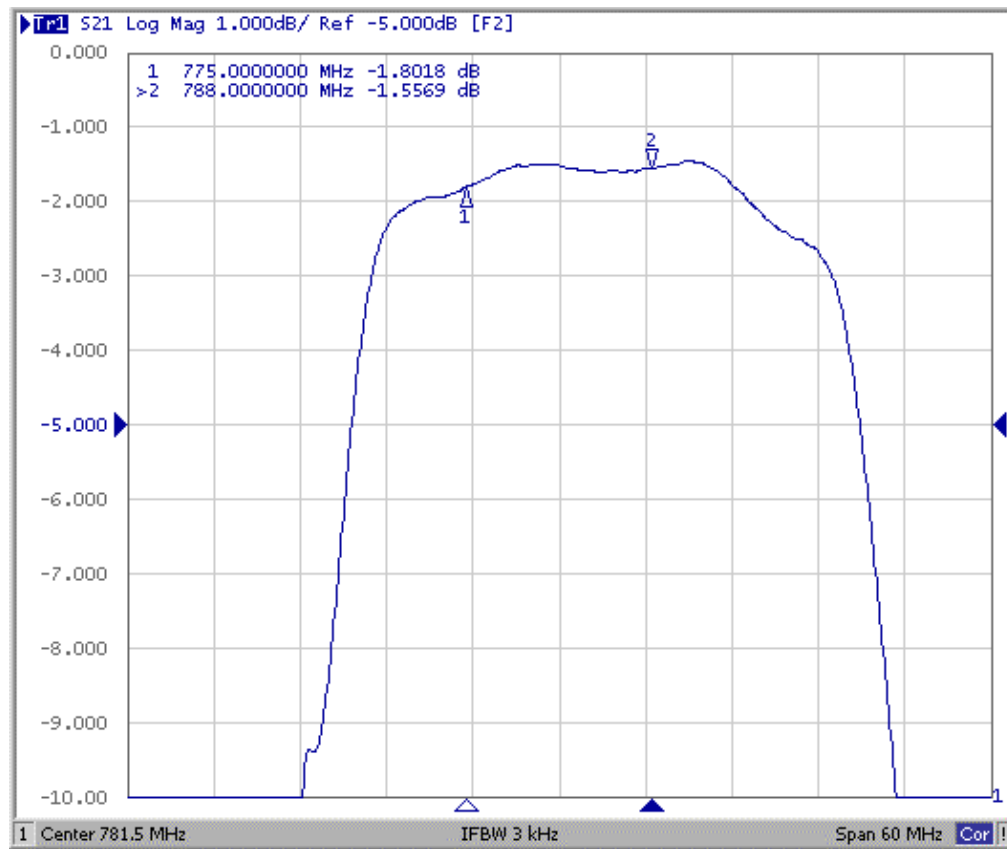


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7''=1000 ; 13''=3000)

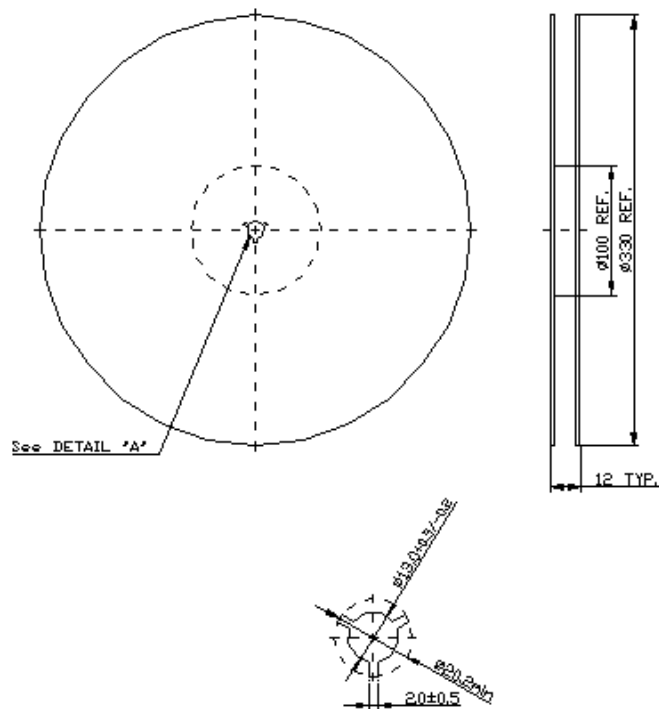

2.TAPE DIMENSION

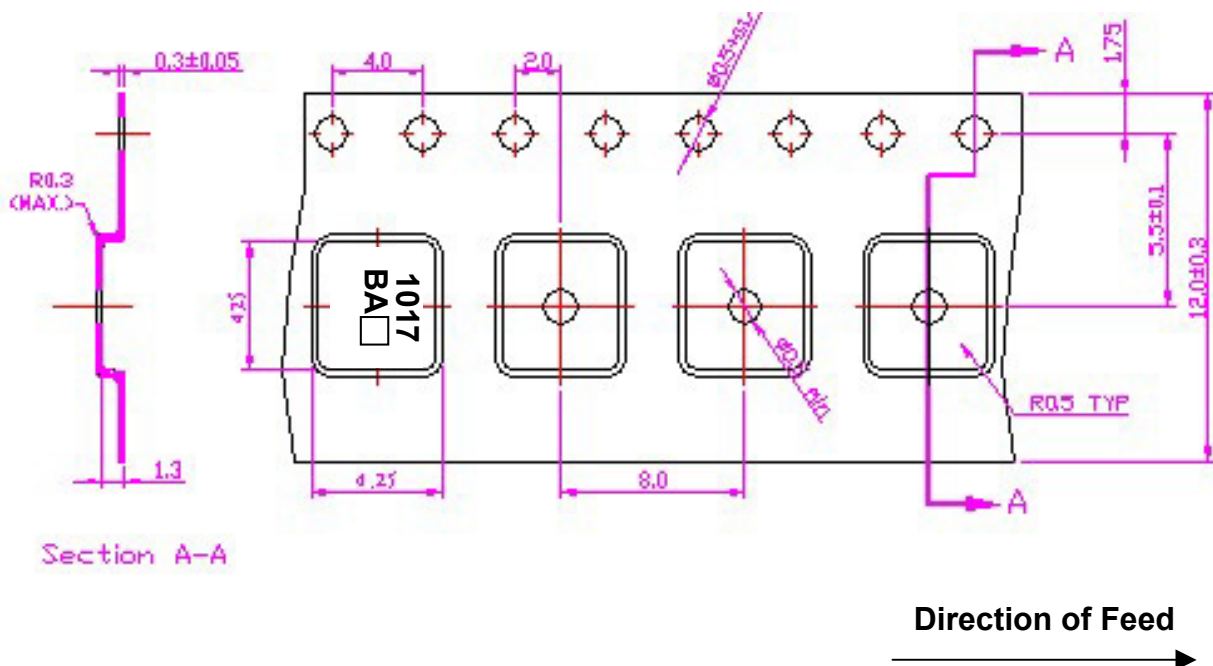

H. RECOMMENDED REFLOW PROFILE :

