



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 1246 MHz SMD 3.0X3.0 mm

TST Part No.: TA1034A

Customer Part No.: _____


Customer signature required


Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 5, 13, 2010

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1246 MHz

MODEL NO.:TA1034A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C

RoHS Compliant
Lead free
Lead-free soldering


B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance (differential) : $Z_s = 200 \ \Omega \ // \ 30nH$

Terminating load impedance (differential) : $Z_L = 200 \ \Omega \ // \ 30nH$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1246	-	-
Bandwidth at -3 dB	MHz	-	47	-	-
Insertion Loss in 1241~1251 MHz	dB	-	2.2	4	-
Amplitude ripple (1241 MHz ~ 1251 MHz)	dB	-	0.4	2	-
Group delay variation (1241 MHz ~ 1251 MHz)	ns	-	8	15	-
I/O Return Loss (1241 MHz ~ 1251 MHz)	dB	8	12	-	-
Attenuation (reference level from 0 dB)					
10 ~ 930 MHz	dB	45	50	-	-
1400 ~ 2000 MHz	dB	44	50	-	-
2000 ~ 2400 MHz	dB	38	50	-	-


C.OUTLINE DRAWING:

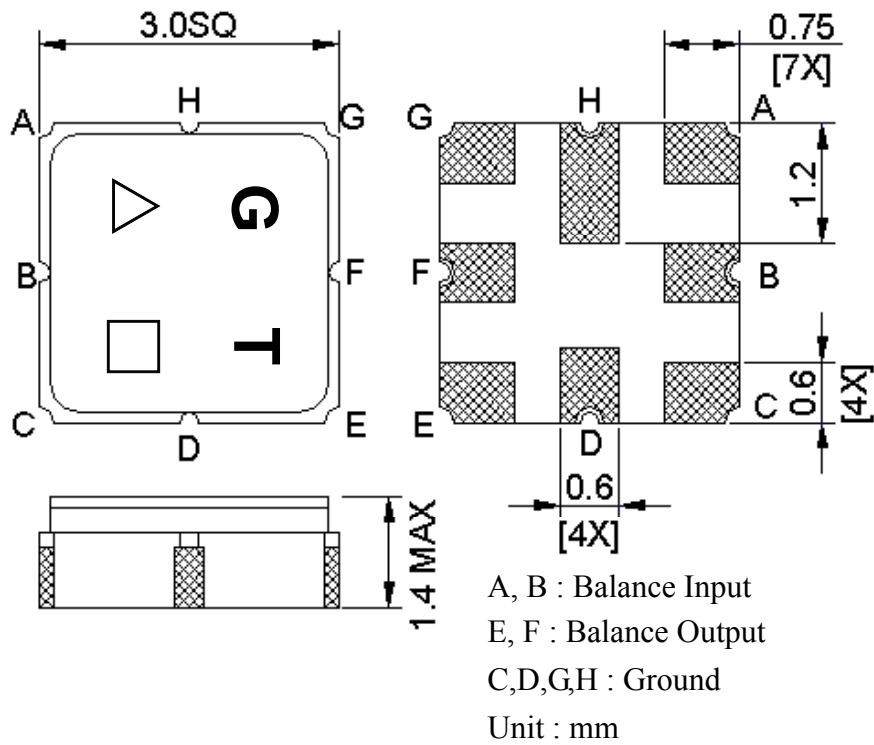


△ : Year Code (2006->6, ..., 2009->9)

□ : Date Code (W01->A,...W26->Z,...W52->z)



D. MEASUREMENT CIRCUIT:

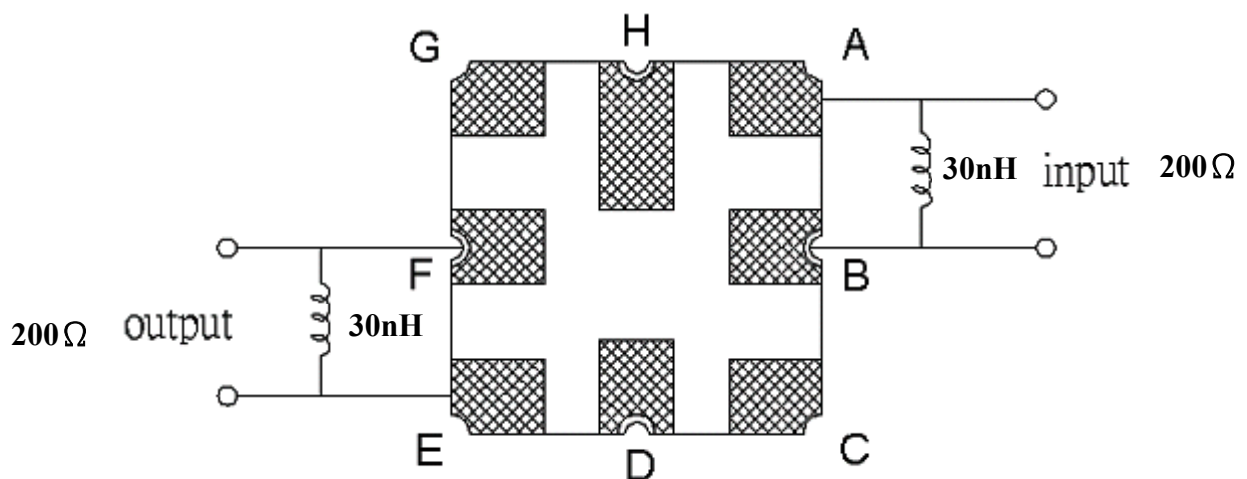


E. PCB Footprint:

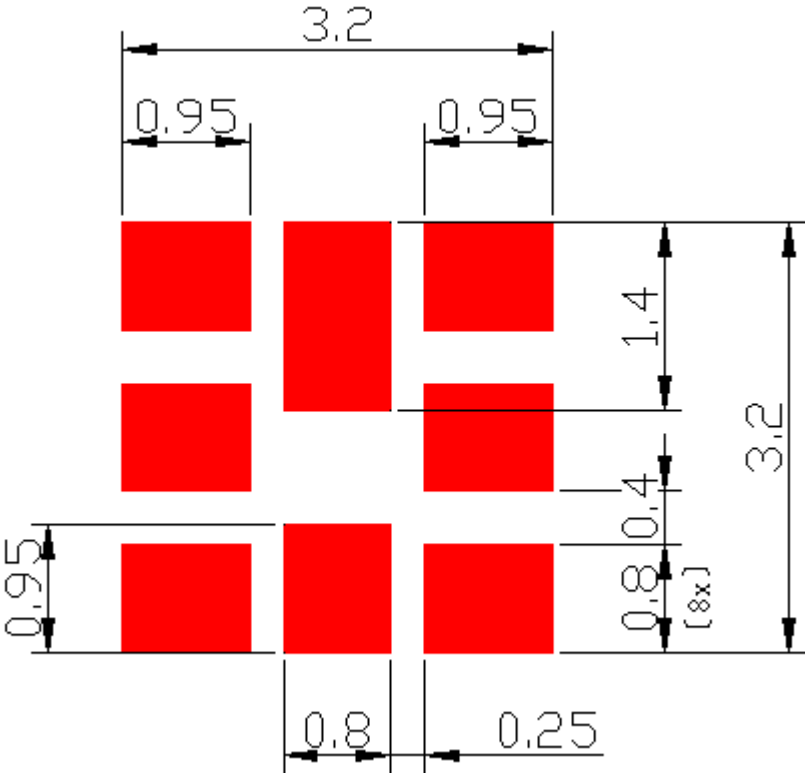


F. Frequency Characteristics :

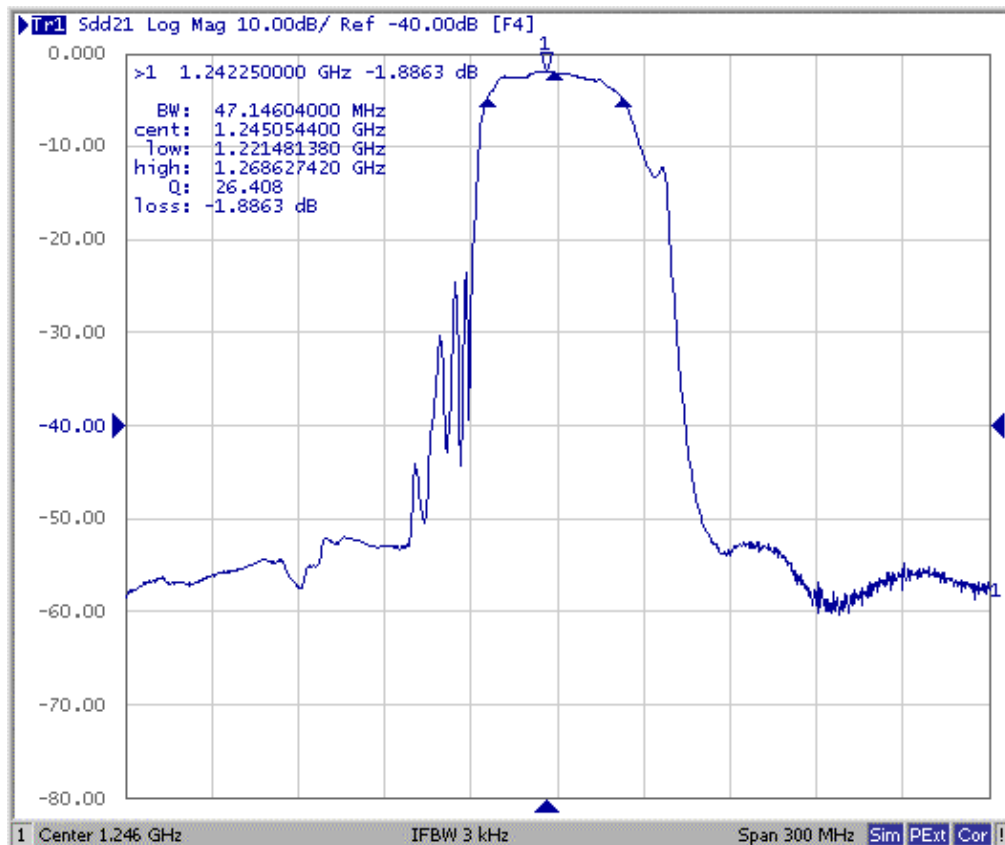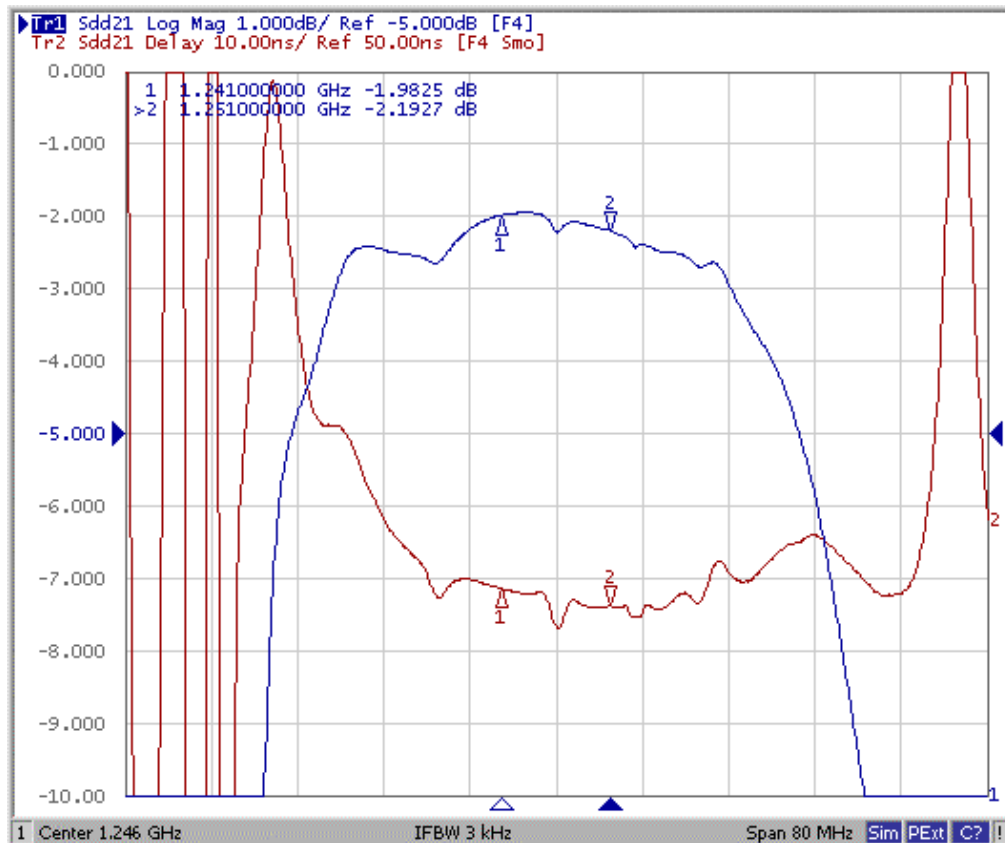

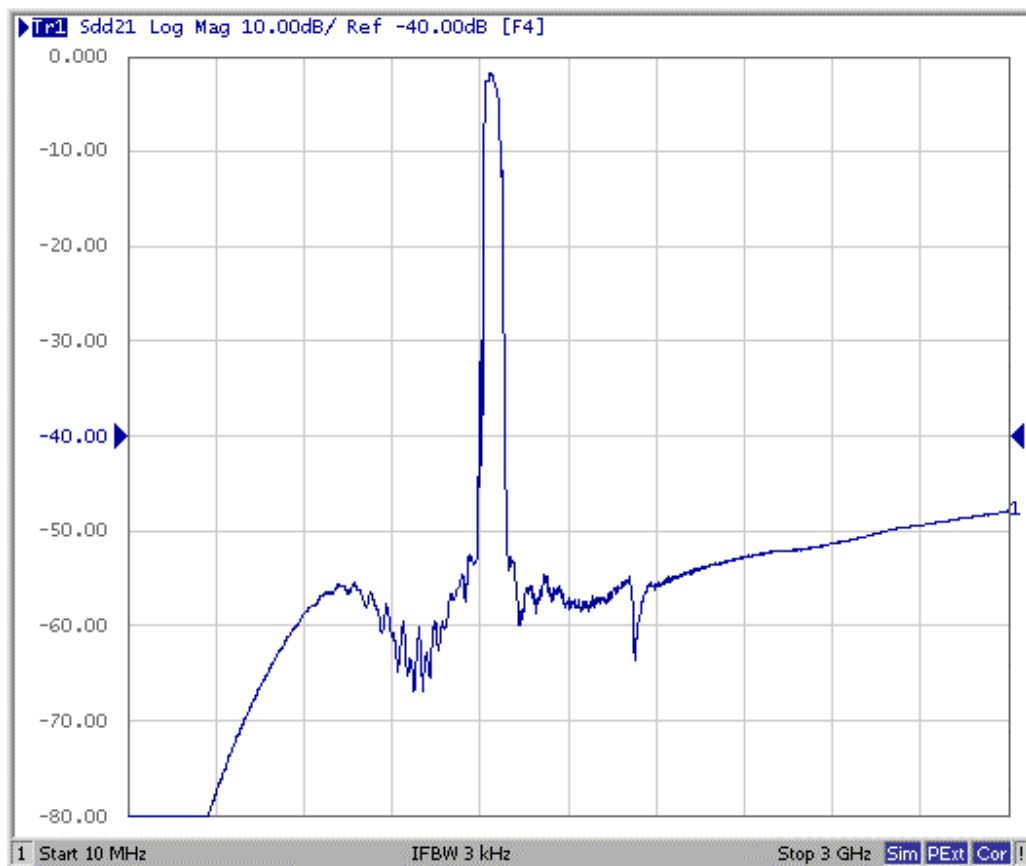


Reflection Functions :

S11

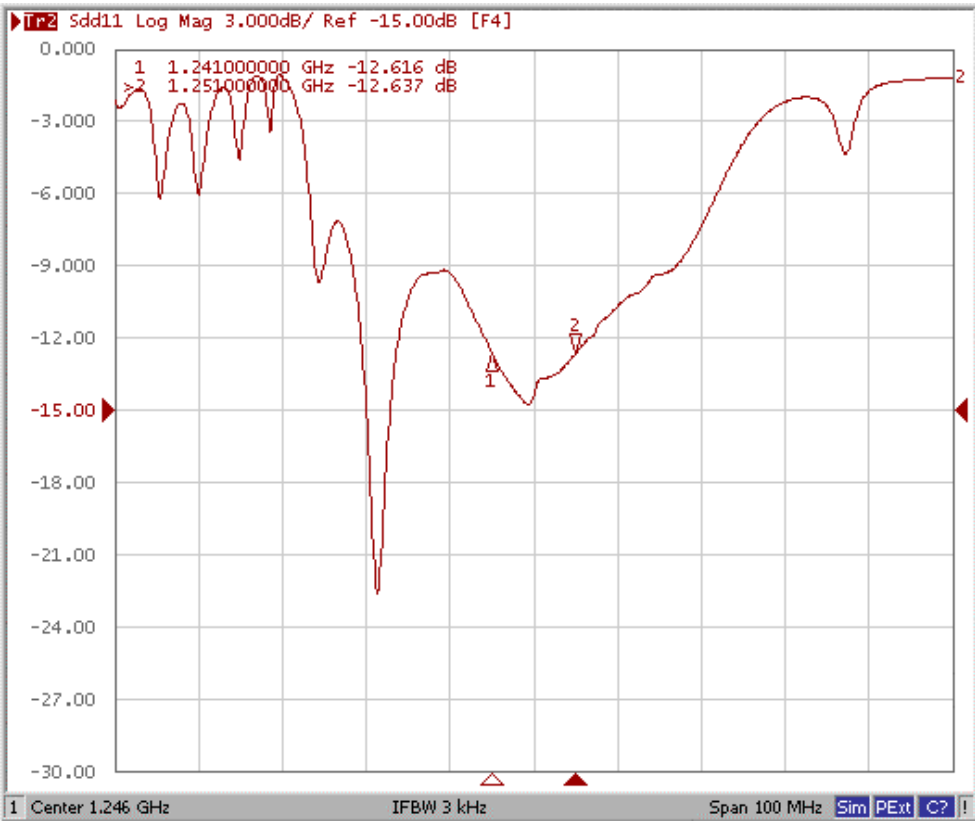


S22

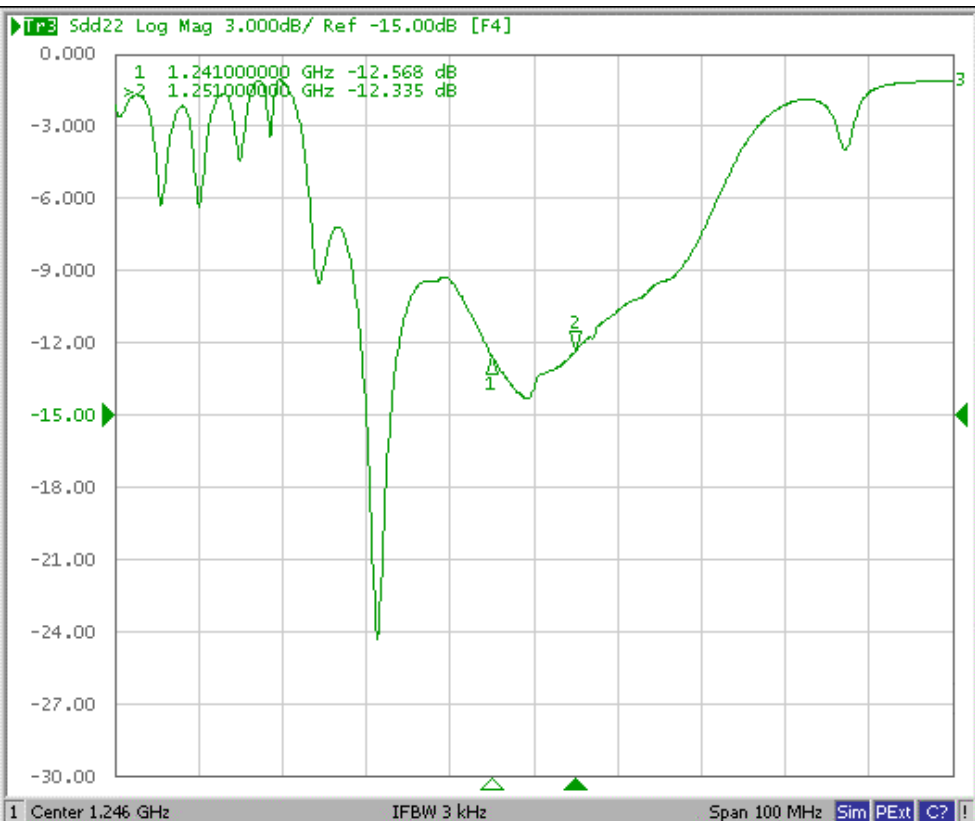


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7''=1000 ; 13''=3000)

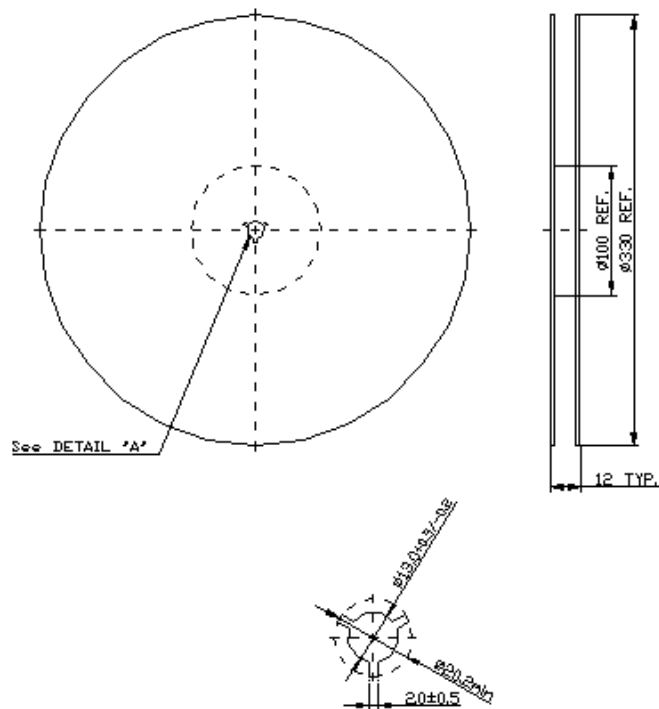

2.TAPE DIMENSION

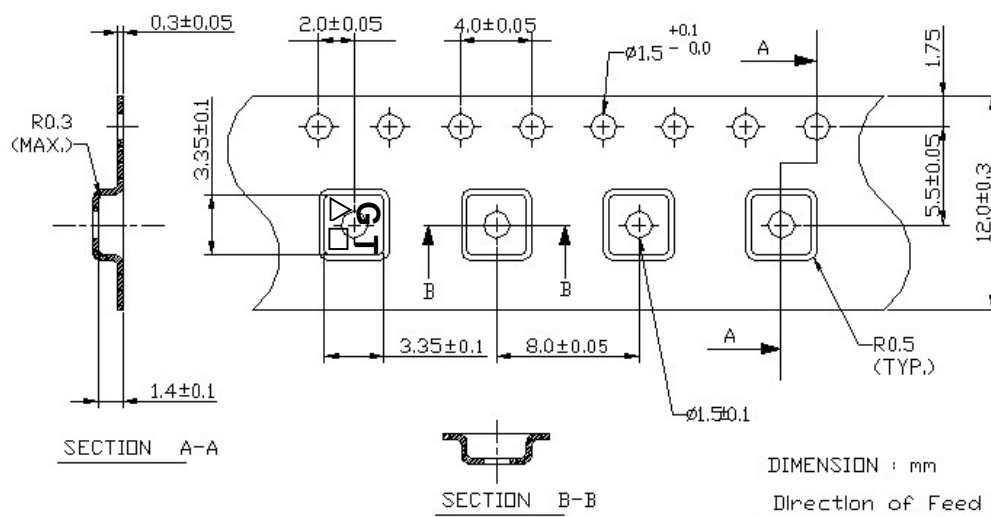

H. RECOMMENDED REFLOW PROFILE :

