



MJE13003-XS

NPN SILICON TRANSISTOR

NPN SILICON POWER TRANSISTOR

DESCRIPTION


These devices are designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. They are particularly suited for 115V and 220V applications in switch mode.

FEATURES

* 700V blocking capability

APPLICATIONS

- * Switching regulator's, inverters
- * Motor controls
- * Solenoid/relay drivers
- * Deflection circuits

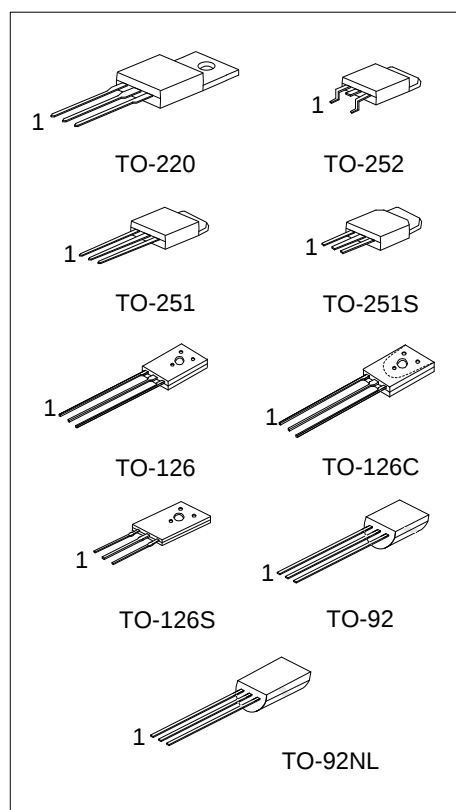

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen-Free		1	2	3	
MJE13003L-XS-TA3-T	MJE13003G-XS-TA3-T	TO-220	B	C	E	Tube
MJE13003L-XS-TM3-T	MJE13003G-XS-TM3-T	TO-251	B	C	E	Tube
MJE13003L-XS-TMS-T	MJE13003G-XS-TMS-T	TO-251S	B	C	E	Tube
MJE13003L-XS-TN3-R	MJE13003G-XS-TN3-R	TO-252	B	C	E	Tape Reel
MJE13003L-XS-T60-F-K	MJE13003G-XS-T60-F-K	TO-126	B	C	E	Bulk
MJE13003L-XS-T6C-A-K	MJE13003G-XS-T6C-A-K	TO-126C	E	C	B	Bulk
MJE13003L-XS-T6C-F-K	MJE13003G-XS-T6C-F-K	TO-126C	B	C	E	Bulk
MJE13003L-XS-T6S-F-K	MJE13003G-XS-T6S-F-K	TO-126S	B	C	E	Bulk
MJE13003L-XS-T92-A-B	MJE13003G-XS-T92-A-B	TO-92	E	C	B	Tape Box
MJE13003L-XS-T92-A-K	MJE13003G-XS-T92-A-K	TO-92	E	C	B	Bulk
MJE13003L-XS-T92-F-B	MJE13003G-XS-T92-F-B	TO-92	B	C	E	Tape Box
MJE13003L-XS-T92-F-K	MJE13003G-XS-T92-F-K	TO-92	B	C	E	Bulk
MJE13003L-XS-T9N-B	MJE13003G-XS-T9N-B	TO-92NL	E	C	B	Tape Box
MJE13003L-XS-T9N-K	MJE13003G-XS-T9N-K	TO-92NL	E	C	B	Bulk

Note: Pin Assignment: B: Base C: Collector E: Emitter

MJE13003G-XS-T60-F-K (1)Packing Type (2)Pin Assignment (3)Package Type (4)Green Package		(1) K: Bulk, B: Tape Box, R: Tape Reel, T: Tube (2) refer to Pin Assignment (3) TA3: TO-220, TM3: TO-251, TMS: TO-251S, TN3: TO-252, T60: TO-126, T6C: TO-126C, T6S: TO-126S, T92: TO-92, T9N: TO-92NL (4) G: Halogen Free and Lead Free, L: Lead Free
---	--	---

MJE13003-XS

NPN SILICON TRANSISTOR

■ MARKING

TO-220 / TO-251 / TO-251S / TO-252	TO-126 / TO-126C / TO-126S
UTC MJE13003 Lot Code 1 Date Code L: Lead Free G: Halogen Free	UTC Pin Code Date Code 13003 Lot Code L: Lead Free G: Halogen Free
TO-92	TO-92NL
UTC MJE 13003 Lot Code Pin Code 1 Date Code L: Lead Free G: Halogen Free	UTC MJE13003 Lot Code Date Code L: Lead Free G: Halogen Free

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT		
Collector-Emitter Voltage			V _{CEO(SUS)}	400	V		
Collector-Base Voltage			V _{CBO}	700	V		
Collector-Emitter Voltage (V _{BE} =0)			V _{CES}	700	V		
Emitter Base Voltage			V _{EBO}	9	V		
Collector Current		Continuous	I _C	1	A		
		Peak (1)	I _{CM}	2	A		
Power Dissipation (Note 2)	T _A =25°C	TO-126/TO-126C TO-126S	P _D	1.4	W		
		TO-92/TO-92NL		1.1	W		
		TO-220		2	W		
		TO-251/TO-251S TO-252		1.56	W		
	T _C =25°C	TO-126/TO-126C TO-126S		20	W		
		TO-92/TO-92NL		1.5	W		
		TO-220		40	W		
		TO-251/TO-251S TO-252		25	W		
		Junction Temperature			T _J	+150	°C
	Storage Temperature			T _{STG}	-55 ~ +150	°C	

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.







2. Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square pad.

■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS (Note)						
Collector-Emitter Sustaining Voltage	V _{CEO(SUS)}	I _C =10mA, I _B =0	700			V
Collector Cutoff Current	I _{CBO}	V _{CB} =700V, I _E =0			10	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} =9.0V, I _C =0			10	μA
ON CHARACTERISTICS (Note)						
DC Current Gain	h _{FE}	V _{CE} =5V, I _C =200mA	15		30	
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _C =500mA, I _B =100mA			0.5	V
Base-Emitter Saturation Voltage	V _{BE(SAT)}	I _C =500mA, I _B =250mA			1.2	V
DYNAMIC CHARACTERISTICS						
Current-Gain-Bandwidth Product	f _T	V _{CE} =10V, I _C =0.1A, f=1MHz	5			MHz
Output Capacitance	C _{OB}	V _{CB} =10V, I _E =0, f=0.1MHz		16		pF
SWITCHING CHARACTERISTICS						
Storage Time	t _S	I _C =0.25A	1.5		4.0	μs

Note: Pulse Test: P_W = 300μs, Duty Cycle ≤ 2%.

■ TYPICAL CHARACTERISTICS

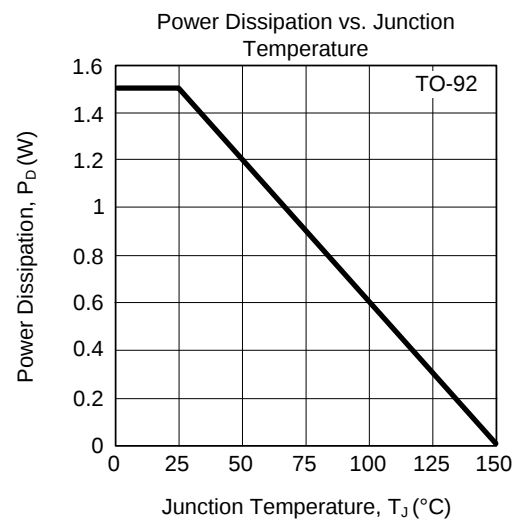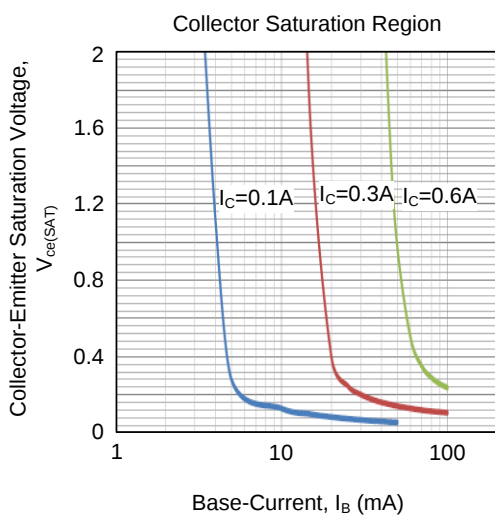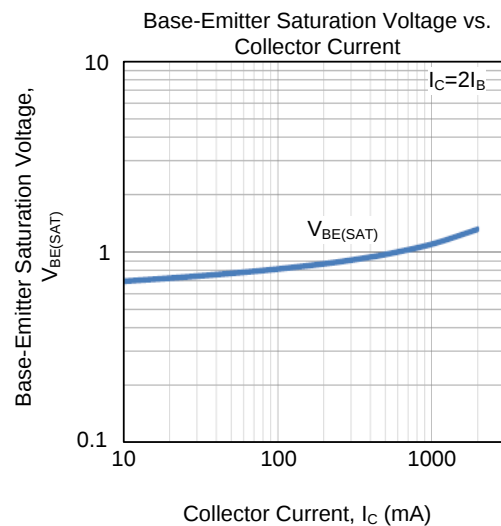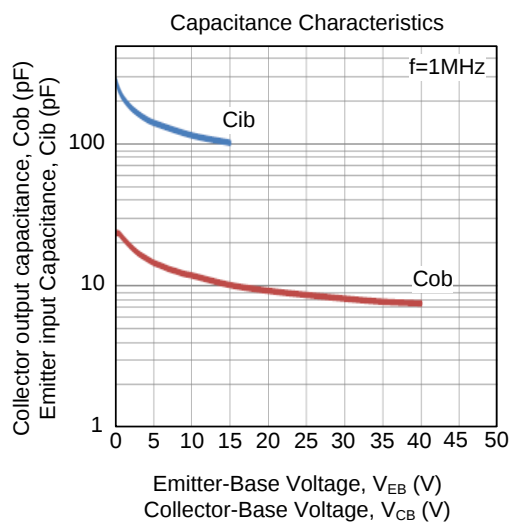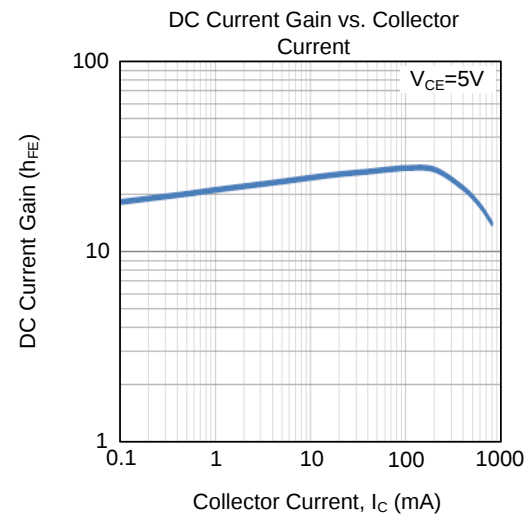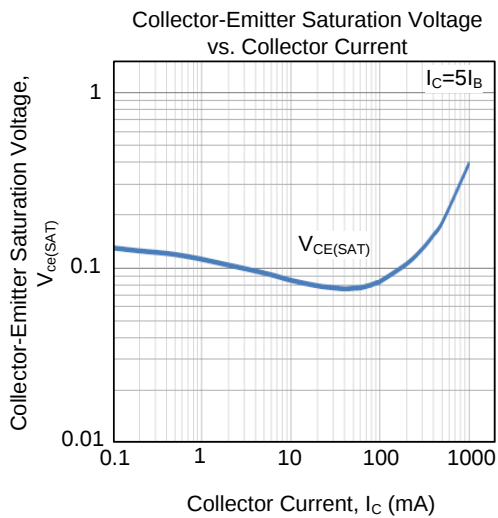

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.