


**B5819WS****DIODE****1A SCHOTTKY BARRIER
RECTIFIER****■ DESCRIPTION**

The UTC **B5819WS** is a schottky barrier rectifier, it uses UTC's advanced technology to provide customers with low forward voltage drop, etc.

The UTC **B5819WS** is suitable for low voltage and high frequency inverters.



■ FEATURES

- * Low forward voltage drop
- * High surge current capability

■ SYMBOL**■ ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
B5819WSL-CB2-R	B5819WSG-CB2-R	SOD-323	K	A	Tape Reel

Note: Pin Assignment: K: Cathode A: Anode

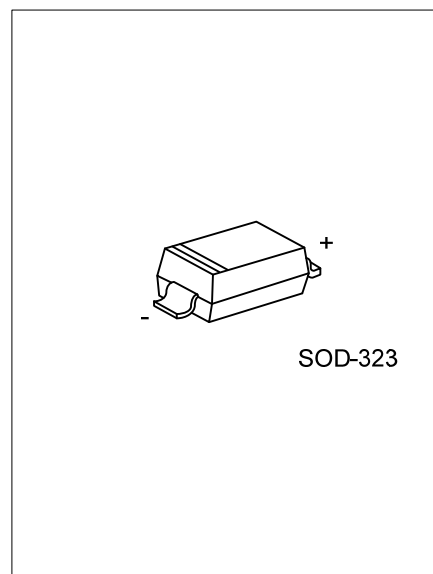■ MARKING

SOD-323

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Recurrent Peak Reverse Voltage	V_{RRM}	40	V
RMS Voltage	V_{RMS}	28	V
DC Blocking Voltage	V_{DC}	40	V
Average Forward Current $T_C=90^{\circ}\text{C}$	$I_{F(AV)}$	1.0	A
Peak Forward Surge Current 8.3ms Half Sine	I_{FSM}	10	A
Storage Temperature	T_{STG}	-65 ~ +150	$^{\circ}\text{C}$
Operating Temperature	T_{OPR}	-65 ~ +125	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA




PARAMETER	SYMBOL	RATINGS	UNIT
Junction To Ambient	θ_{JA}	500	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Instantaneous Forward Voltage	V_F	$I_{FM}=1.0\text{A}$, $T_J=25^{\circ}\text{C}$ (Note 1)			0.60	V
		$I_{FM}=3\text{A}$, $T_J=25^{\circ}\text{C}$ (Note 1)			0.90	V
DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_A=25^{\circ}\text{C}$			1	mA
Junction Capacitance	C_J	Measured at 1.0MHz, $V_R=4.0\text{V}$		120		pF

Note: Pulse Test: Pulse width 300 μs , Duty cycle 2%.

■ TYPICAL CHARACTERISTICS

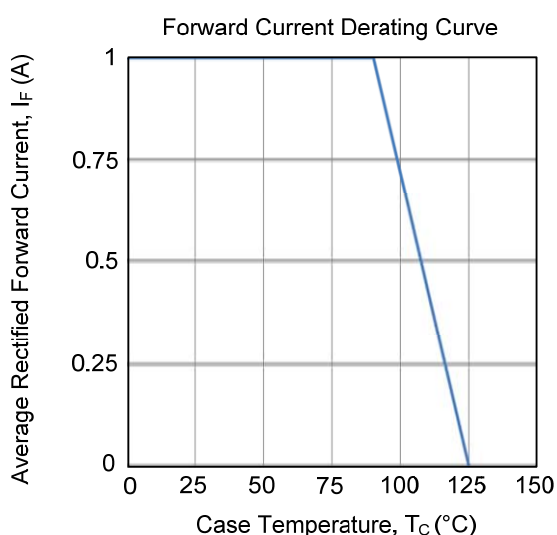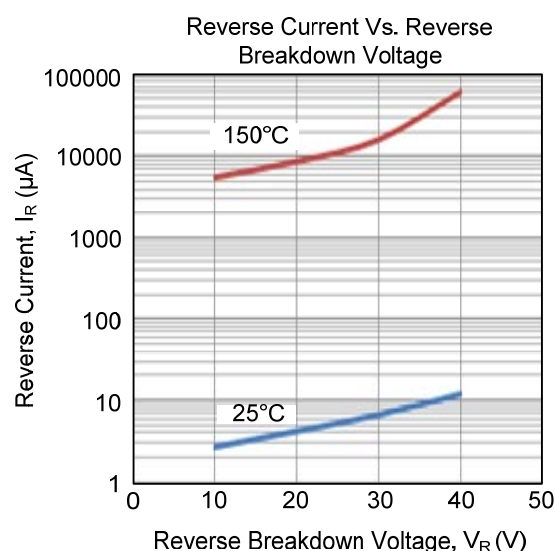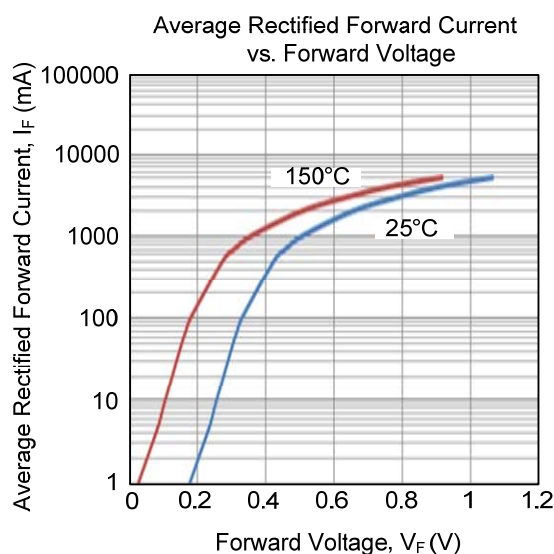

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.