


**UTM2054****Power MOSFET****N-CHANNEL ENHANCEMENT
MODE****DESCRIPTION**

The **UTM2054** uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

FEATURES


- * $R_{DS(ON)} \leq 40m\Omega$ @ $V_{GS}=10V$, $I_D=5.0A$
- * $R_{DS(ON)} \leq 54m\Omega$ @ $V_{GS}=4.5V$, $I_D=3.5A$
- * $R_{DS(ON)} \leq 130m\Omega$ @ $V_{GS}=2.5V$, $I_D=2.5A$
- * Ultra low gate charge (typical 11.5 nC)
- * Low reverse transfer capacitance (C_{RSS} = typical 60 pF)
- * Fast switching capability
- * Avalanche energy specified
- * Improved dv/dt capability, high ruggedness

SYMBOL**ORDERING INFORMATION**



Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTM2054L-AB3-R	UTM2054G-AB3-R	SOT-89	G	D	S	Tape Reel
UTM2054L-AE3-R	UTM2054G-AE3-R	SOT-23	G	S	D	Tape Reel

Note: Pin Assignment: G: Gate S: Source D: Drain

UTM2054G-AB3-R		(1)Packing Type	(1) R: Tape Reel
		(2)Package Type	(2) AB3: SOT-89, AE3: SOT-23
		(3)Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free

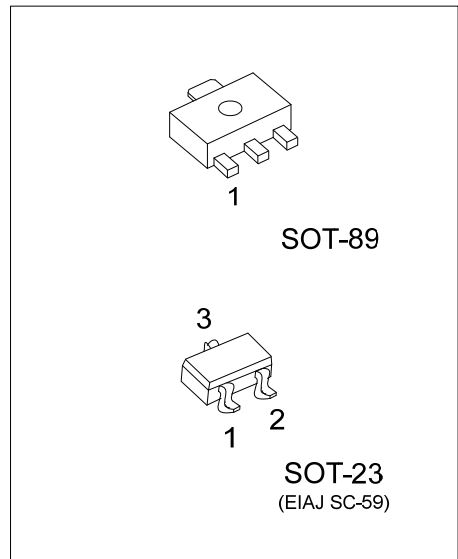

MARKING

SOT-23	SOT-89
 M054 L: Lead Free G: Halogen Free	 UTM2054 1 Date Code L: Lead Free G: Halogen Free

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 16	V
Drain Current ($V_{GS}=10\text{V}$)	Continuous	5	A
	Pulsed	20	
Diode Continuous Forward Current	I_S	3	A
Power Dissipation	SOT-89	1.47	W
	SOT-23	1.25	W
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	$-55 \sim +150$	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	20			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =16V, V _{GS} =0V			1	μA
Gate-Source Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±16V			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	0.6	0.9	1.5	V
Static Drain-Source On-State Resistance (Note)	R _{DS(ON)}	V _{GS} =10V, I _D =5A		35	40	mΩ
		V _{GS} =4.5V, I _D =3.5A		45	54	
		V _{GS} =2.5V, I _D =2.5A		110	130	
DYNAMIC CHARACTERISTICS						
Input Capacitance	C _{ISS}	V _{DS} =15V, V _{GS} =0V, f=1.0MHz		450		pF
Output Capacitance	C _{OSS}			100		pF
Reverse Transfer Capacitance	C _{RSS}			60		pF
Gate resistance	R _G	V _{GS} =0V, V _{DS} =0V, f=1MHz		2.5		Ω
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{D(ON)}	V _{DD} =10V, R _L =10Ω, I _{DS} =1A, V _{GEN} =4.5V, R _G =6Ω		7	10	ns
Turn-On Rise Time	t _R			15	25	ns
Turn-Off Delay Time	t _{D(OFF)}			19	26	ns
Turn-Off Fall Time	t _F			6	7	ns
Total Gate Charge	Q _G	V _{DS} =10V, V _{GS} =4.5V, I _{DS} =5 A		11.5	15	nC
Gate-Source Charge	Q _{GS}			3.8		nC
Gate-Drain Charge	Q _{DD}			5.2		nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Diode Forward Voltage (Note)	V _{SD}	I _{SD} =3A, V _{GS} =0V		0.7	1.3	V

Note: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.