



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 1905 MHz (BW 50MHz) SMD 1.1X0.9mm

TST Parts No.:TA2569A

Customer Parts No.:_____

Customer signature required

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Michael Yang *Michael*

Approval by:_____ Andy Yu *Andy Yu*

Date:_____ 2021/08/02

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1905 MHz (BW 40Hz) SMD 1.1x0.9x0.55mm

MODEL NO.:TA2569A

REV. NO.:3.0

A. MAXIMUM RATING:

1. Input Power Level: 26 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +105°C
5. Moisture Sensitivity Level: MSL3




Electrostatic Sensitive Device (ESD)


B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Type.	Max.	Note
Center Frequency Fc	MHz	-	1905	-	-
Insertion Loss (1880~1930 MHz) IL	dB	-	1.4	2.5	-
VSWR (1880~1930 MHz)		-	1.4	2.5	
Amplitude ripple (1880~1930 MHz)	dB	-	0.5	1.4	-
Attenuation					-
10 ~ 1710 MHz	dB	30	35	-	
1710 ~ 1805 MHz	dB	32	36	-	-
1805 ~ 1840 MHz	dB	25	30	-	-
1840 ~ 1850 MHz	dB	10	13	-	23 ~ 27°C-
1960 ~ 1970 MHz	dB	10	13	-	23 ~ 27°C-
1970 MHz	dB	28	33	-	-
2110 ~ 2200 MHz	dB	30	35	-	-
2200 ~ 4000 MHz	dB	28	31	-	-
4000 ~ 6000 MHz	dB	27	34	-	-
Temperature coefficient	ppm/°C	-36			
Package size	mm	SMD 1.1x0.9			


C.FREQUENCY CHARACTERISTICS:
S21 response: (span 360MHz)

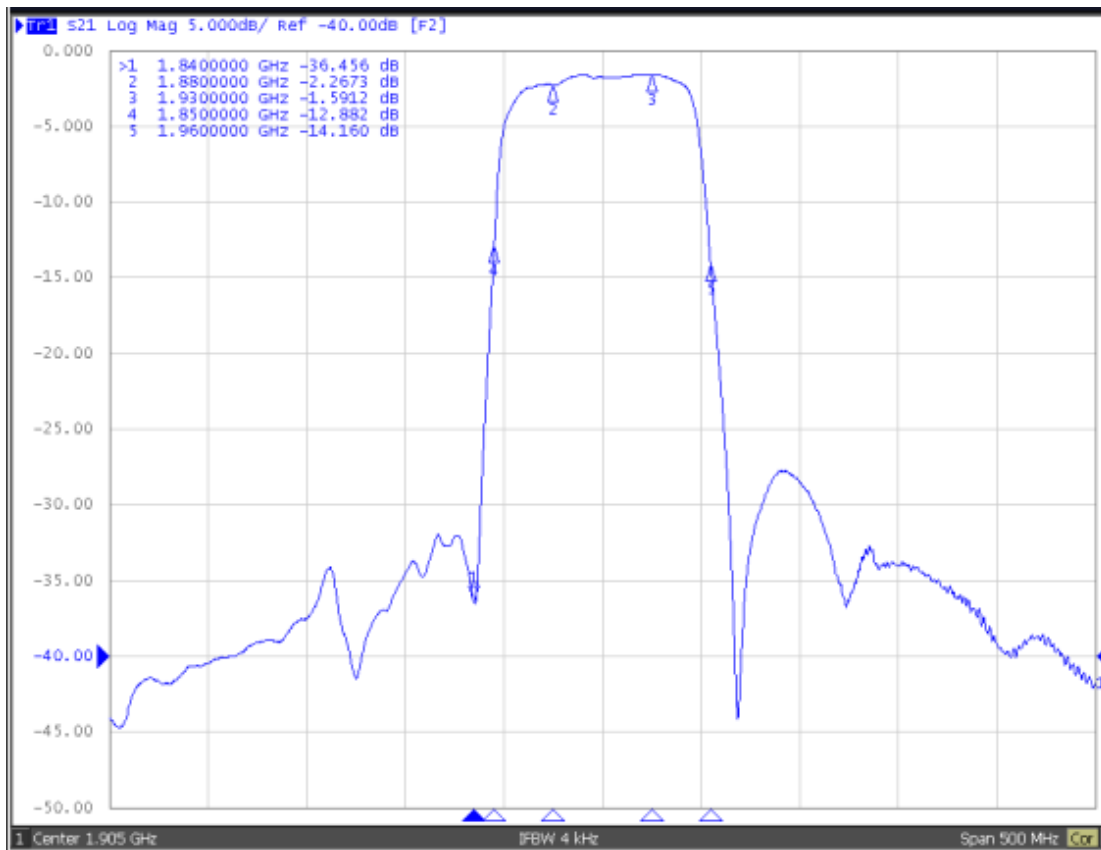



S21 response: (span 200MHz)

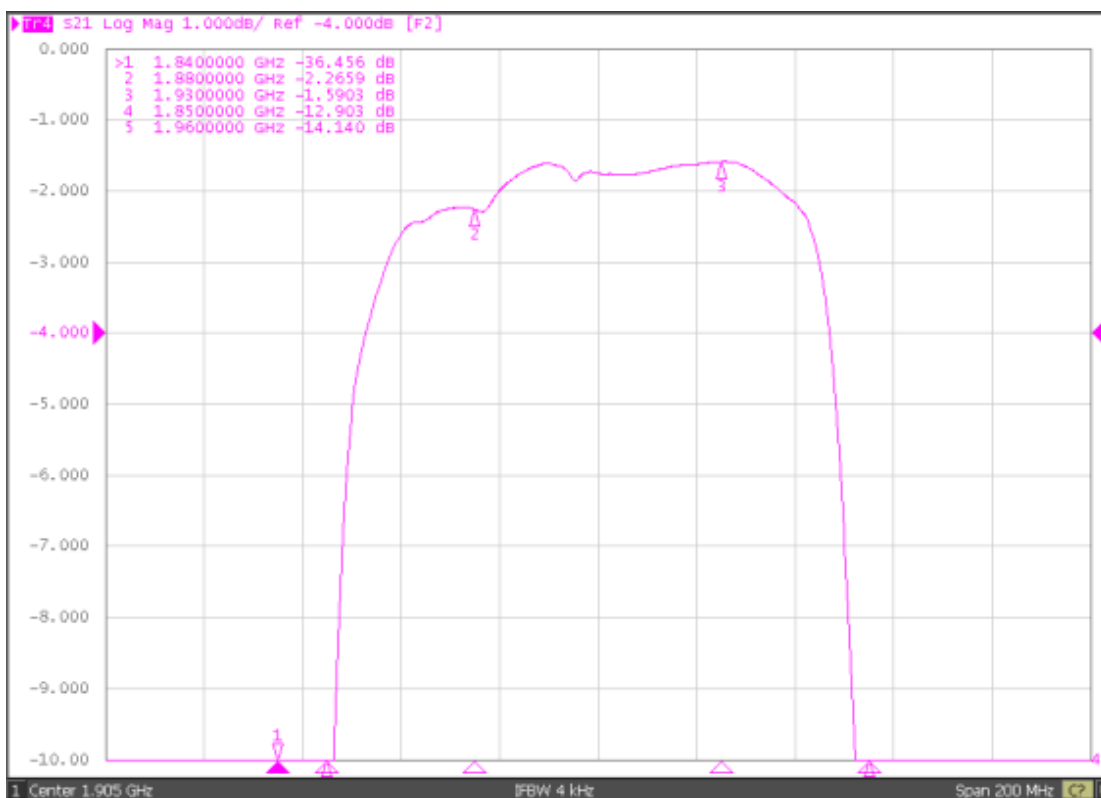



S21 response: (span 3GHz)

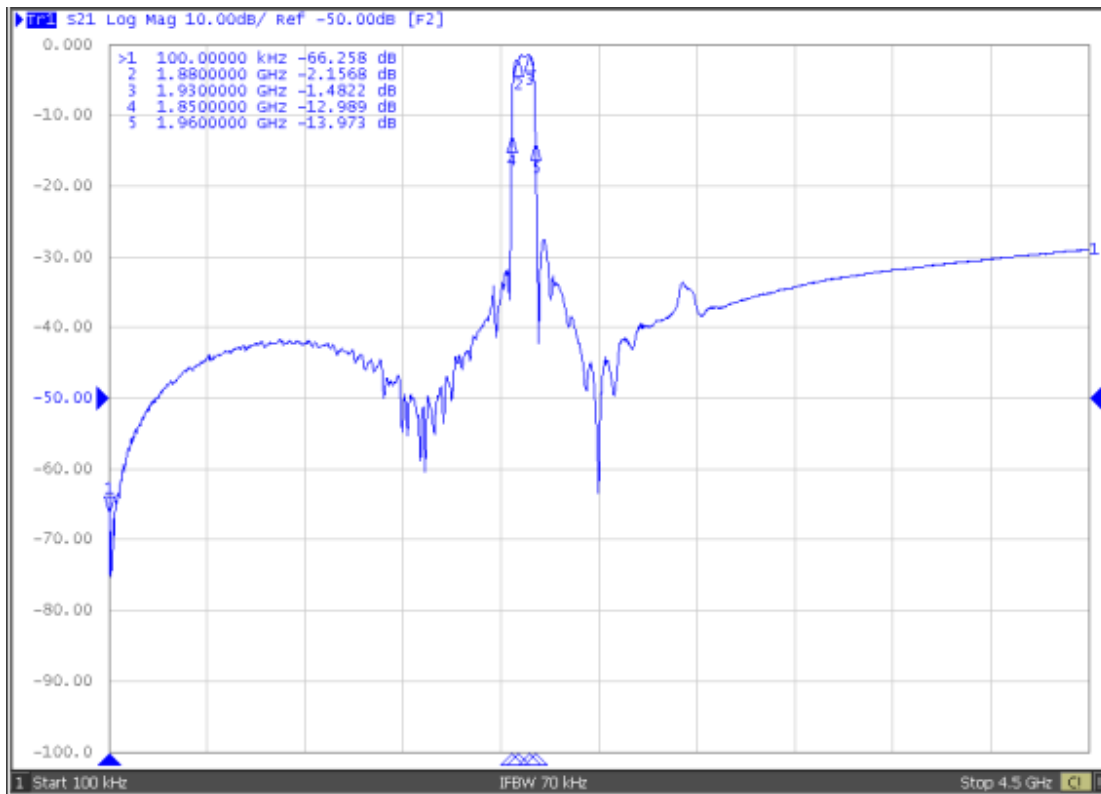

S11/S22 :

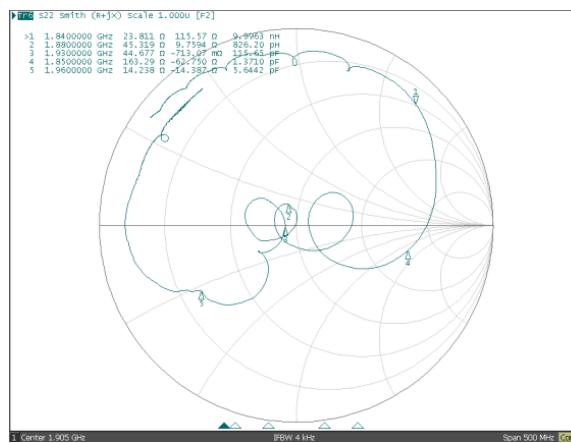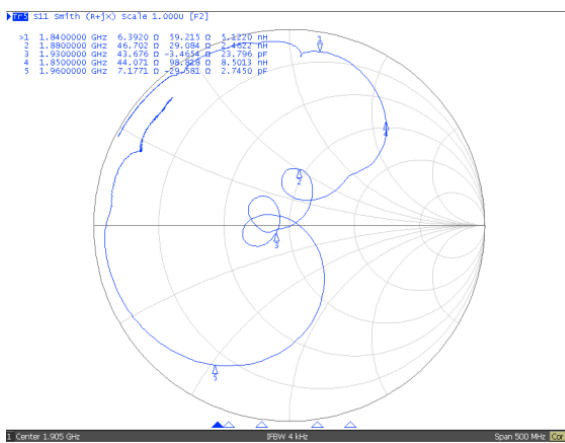


D. OUTLINE DRAWING:

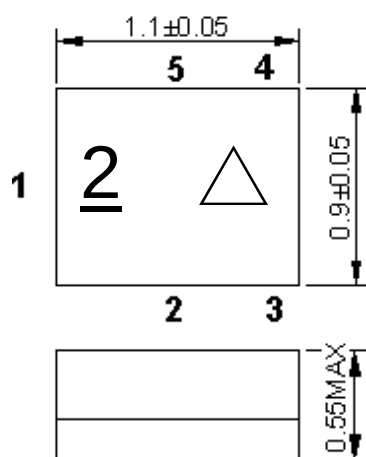

All tolerances are ± 0.05 mm unless otherwise specified
Coplanarity : 0.1 mm max.

1 to 5 : Pin No.

Unit : mm

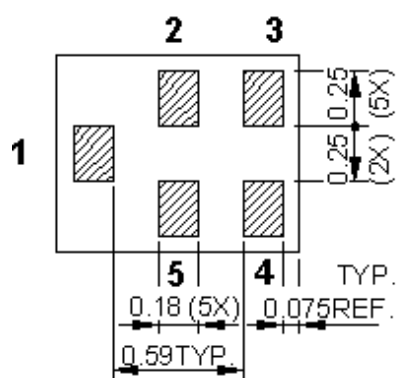


Pin No.	Symbol	Function
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground


Δ : Year/Month Code (Follow the table)

YEAR/Month	1	2	3	4	5	6	7	8	9	10	11	12
2021	A	B	C	D	E	F	G	H	J	K	L	M
2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2023	a	b	c	d	e	f	g	h	j	k	l	m
2024	n	p	q	r	s	t	u	v	w	x	y	z
2025	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>	<u>J</u>	<u>K</u>	<u>L</u>	<u>M</u>
2026	<u>N</u>	<u>P</u>	<u>Q</u>	<u>R</u>	<u>S</u>	<u>T</u>	<u>U</u>	<u>V</u>	<u>W</u>	<u>X</u>	<u>Y</u>	<u>Z</u>
2027	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>	<u>g</u>	<u>h</u>	<u>i</u>	<u>k</u>	<u>l</u>	<u>m</u>
2028	<u>n</u>	<u>p</u>	<u>q</u>	<u>r</u>	<u>s</u>	<u>t</u>	<u>u</u>	<u>v</u>	<u>w</u>	<u>x</u>	<u>y</u>	<u>z</u>

E. MEASUREMENT CIRCUIT:

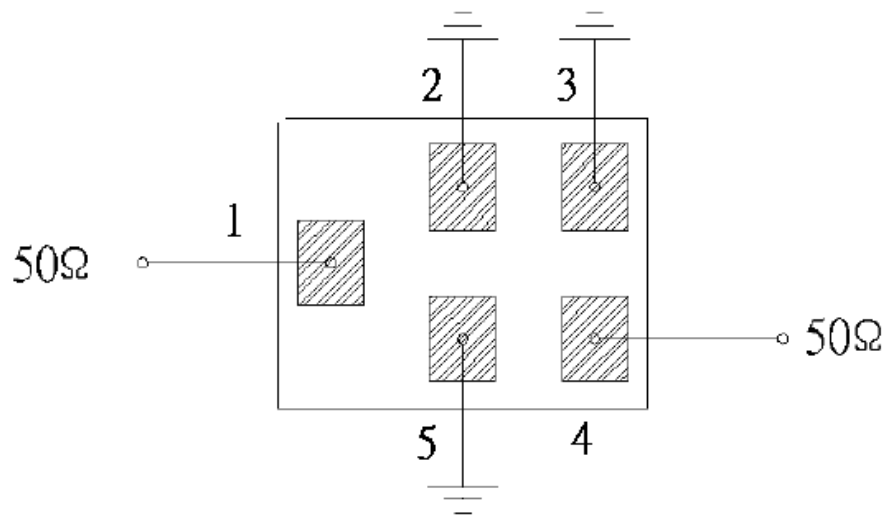


F. FOOT PRINT :

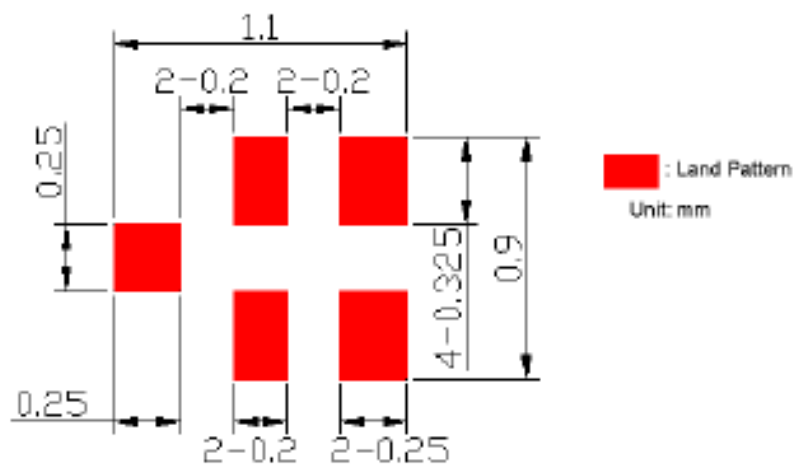


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

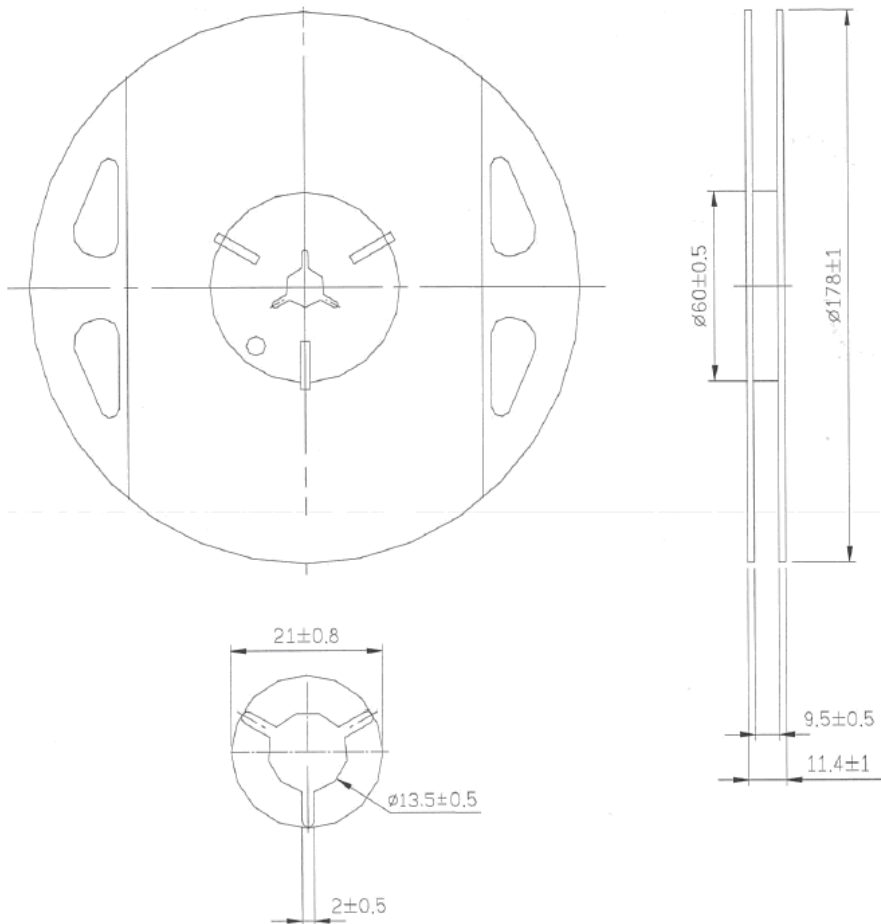

2. TAPE DIMENSION

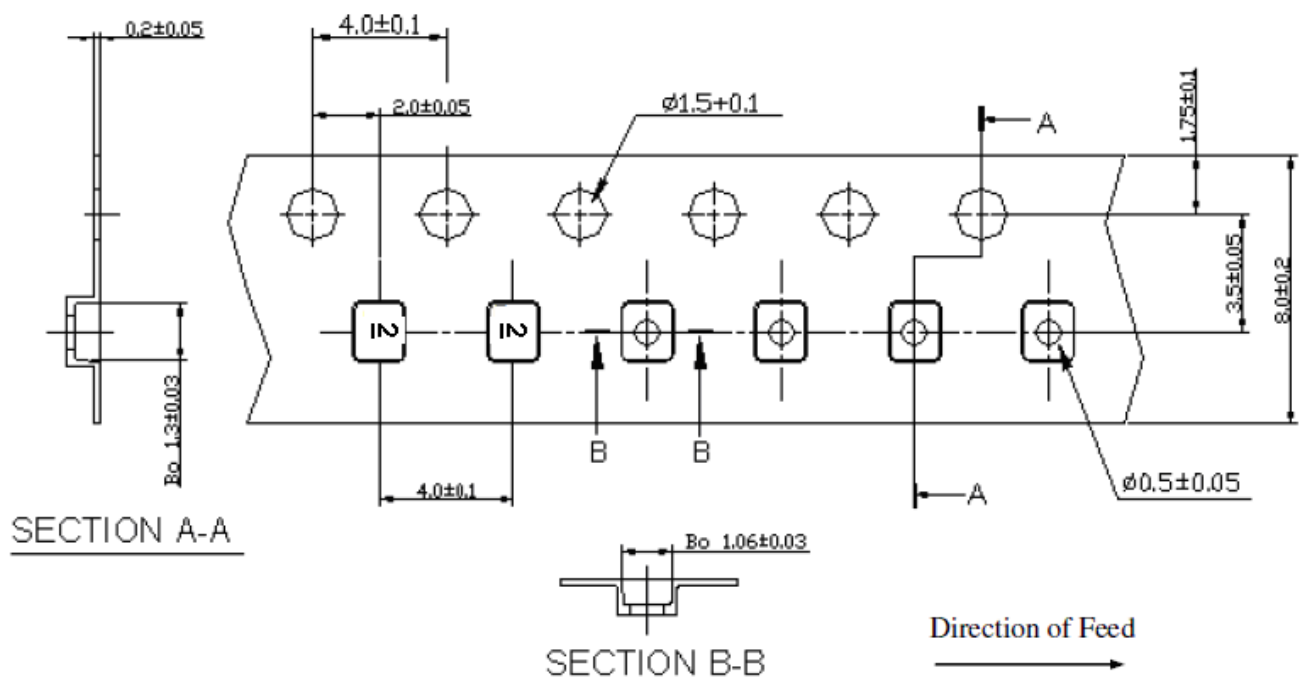

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

