

SPECIFICATION FOR APPROVAL

承 認 書

Description : Micro Dynamic Speaker

Kingstate Part No. : KDMG40004-10WA

Customer's Model No. : _____

Specification No. : PKD-8369

Number Of The Edition : 1.1

CUSTOMER'S APPROVED SIGNATURE		



志豐電子股份有限公司 **KINGSTATE ELECTRONICS CORP.**

Address :10F, No. 69-11, Sec. 2, Chung Cheng E. Rd., Tamshui County, Taipei Hsien, Taiwan, R.O.C.

International sales dept.: TEL:886-2-2809-5651 FAX:886-2-2809-7151

Domestic sales dept.: TEL:886-2-2809-0668 FAX:886-2-28096748

<http://www.kingstate.com.tw>

Approved by	Checked by	Issued by
		Fei 06/29/11'

A. SCOPE 範疇


This specification applies speaker, **KDMG40004-10WA**

此規格書適用於喇叭, **KDMG40004-10WA**


B. SPECIFICATION 規格

No.	Item	Symbol	Unit	Specification	Condition
1	Dimension 尺寸		mm	ϕ 40.0×5.0	
2	Power Rating 功率		W	Rated. 1.0 / MAX. 2.0	Maximum Power:IEC-60268-5 Filter 60s On/120s Off 10 Cycles (Room TEMP.)
3	Impedance 阻抗	Ω	ohm	4± 15%	At 1.0kHz 1.0V
4	Resonance Frequency 低音諧振	Fo	Hz	560± 20%	At 1.0V
5	Output S.P.L. 音壓位準		dB	102 ± 3dB(1.0w/10cm) 83 ± 3dB(1w/1m)	At 1.0k,1.2k,1.5k,2.0kHz (Average figures)
6	Frequency Range 有效頻寬		Hz	Fo---6K	Output S.P.L. ±10dB
7	Distortion 失真		%	5% Max.	At 1.0kHz ,1.0W
8	Voice Coil 音圈		mm		
9	Magnet 磁石		mm	ϕ 12.5×1.5	Nd-Fe-B(鈹鐵鋁)
10	Flux Density 磁通密度		Gauss		Min.
11	Operating temp. 操作溫度		℃	-20 ~ +55	
12	Buzzer & Rattle 異常音				Not be audible at 2.0V sine wave between Fo ~ 6KHz 輸入 2.0V 正弦波從 Fo 到 6KHz 之間無異常音.
13	Weight 重量		g	8.0	
14	Material 材質			Metal	
15	Environmental Protection Regulation 環保法規			RoHS	

C. TYPICAL FREQUENCY RESPONSE CURVE 頻率響應曲線

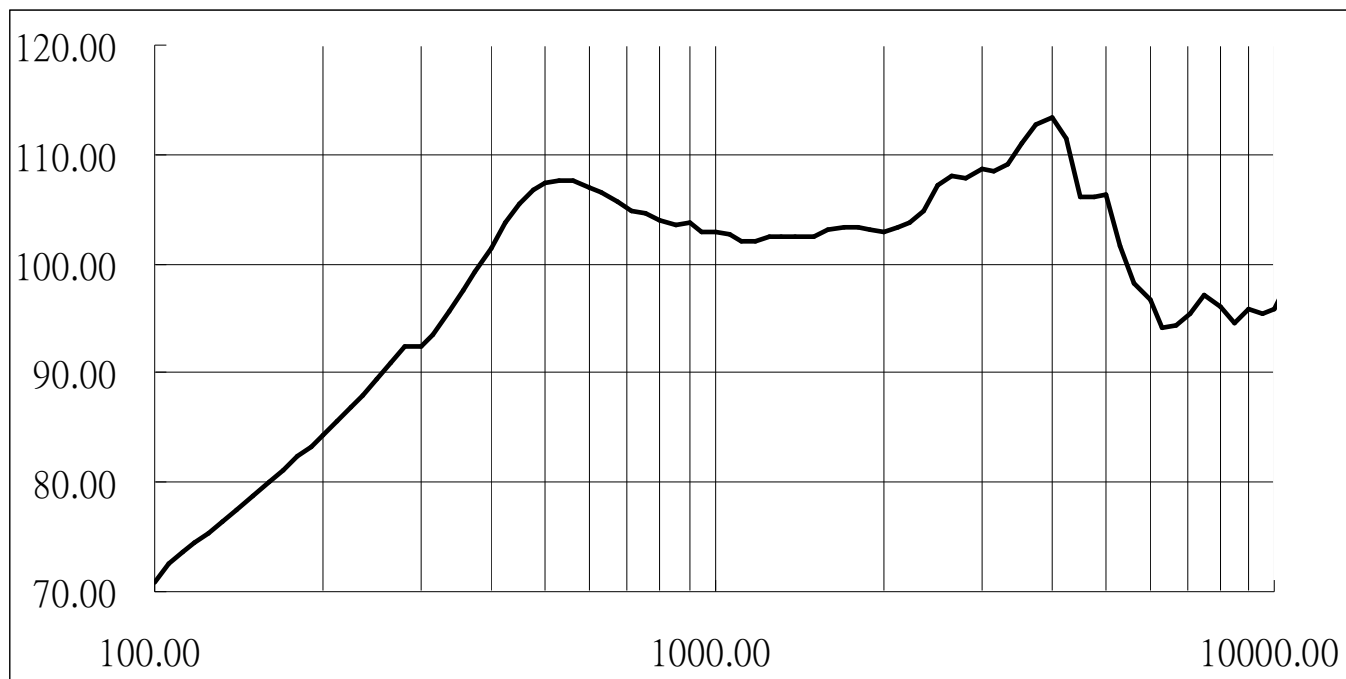


D. APPEARANCE DRAWING 外觀尺寸圖

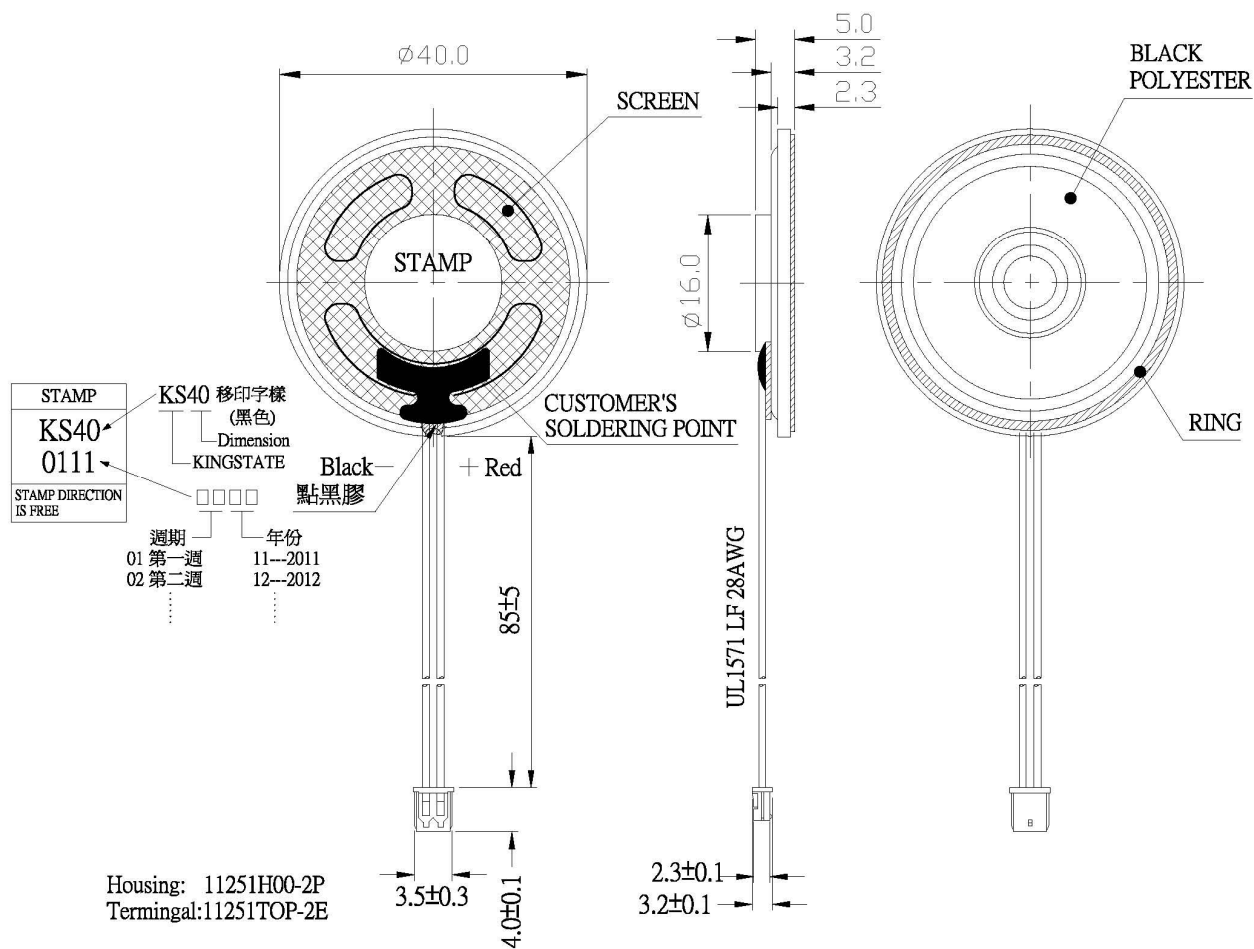

Tol: ± 0.3

Unit: mm

E. MEASUREMENT CIRCUIT 測量線路

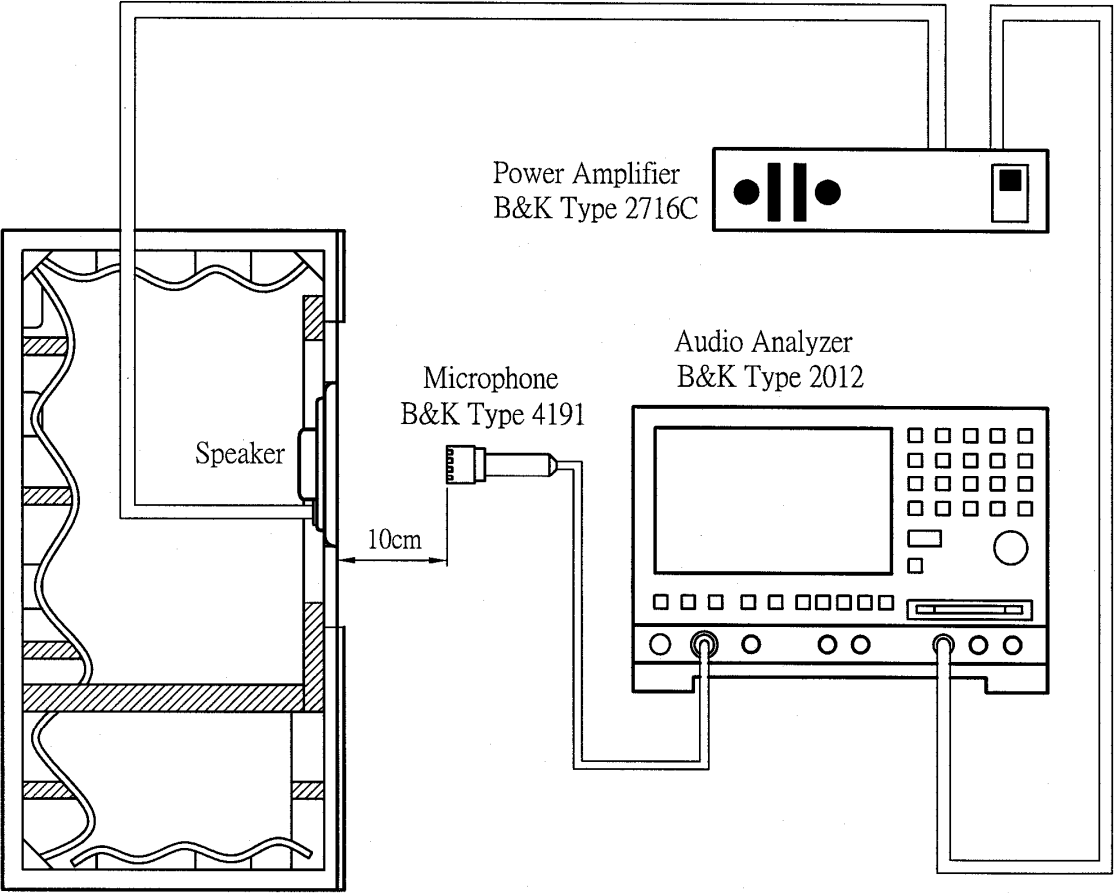


JIS C5531
940mm x 640mm x 1240mm

F. MECHANICAL CHARACTERISTICS 機械特性

No.	Item	Test condition	Evaluation standard
1	PCB Wire Pull Strength PCB 線材拉力	The pull force shall be applied to double lead wire : Horizontal 3.0N(0.306kg) for 30 seconds. 雙線材水平方向施以 3.0N(0.306kg)的力量, 30 秒.	No damage and cutting off 不鬆動, 不脫落.
2	Vibration Test 振動測試	Speaker shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 per-pendicular directions for 2 hours. 振動週波數 10~55Hz、全振幅 1.5mm 於 X、Y、Z 3 個方向, 各 2 小時.	No obstacle to be harmful to normal operation; damages, cracks, rusts and distortions. Should not be audible at 2.0V sine wave between Fo ~ 6KHz
3	Drop Test 落下測試	Drop the speakers contained in normal box onto the board 40mm thick 10 times from the height of 75cm 將揚聲器置於盒中, 自 75 公分高度落在 40mm 木板上共 10 次.	測試後無任何障礙防礙正常 操作.且在輸入 2.0V 正弦波 從 Fo 到 6KHz 之間無異常音.

G. ENVIRONMENTAL TEST 環境試驗

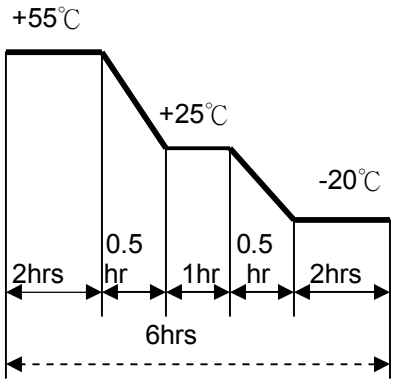No.	Item	Test conditions	Evaluation standard
1	High temp. Test 高溫測試	After being placed in a chamber at +55°C for 96 hours 置於+55°C環境中 96 小時	Being placed for 6 hours at +25°C, speaker shall be measured. No obstacle to be harmful to normal operation; damages, cracks, rusts, etc. Should not be audible at 2.0V sine wave between Fo ~ 6KHz. Fo should meet initial one. S.P.L. deviation of unit should be within ±3dB 經測試後，靜置於+25°C（室溫）環境中 6 小時後，測試後無任何障礙防礙正常操作。且在輸入 2.0V 正弦波從 Fo 到 6KHz 之間無異常音。Fo 與原規格值相同，輸出音壓變化量在±3dB 內。
2	Low temp. Test 低溫測試	After being placed in a chamber at -20°C for 96 hours. 置於-20°C環境中 96 小時	
3	Humidity test 相對濕度測試	After being placed in a chamber at +40°C and 90±5%RH relative humidity for 96 hours. 置於+40°C，相對濕度 90±5%環境中 96 小時	
4	Temp. cycle test 溫度循環測試	The part shall be subjected to 5 cycles. One cycle shall be consist of: 單體承受溫度循環測試 5 次，其循環內容如圖示： 	

H. Recommended Temperature Profile For Hand Soldering 建議手焊溫度

Hand Soldering
370±10°C / 3±1 Sec


I. RELIABILITY TEST 信賴性試驗

No.	Item	Test conditions	Evaluation standard
1	Load test 連續負荷	1.0W white noise is applied for 96 hours, at room temp. 在室溫下，輸入功率 1.0W，白雜音連續操作 96 小時。	Being placed for 1 hours at +25°C, speaker shall be measured. No obstacle to be harmful to normal operation; damages, cracks, rusts, etc. Should not be audible at 2.0V sine wave between Fo ~ 6KHz. Fo should meet initial one. S.P.L. deviation of unit should be within ±3dB 經測試後，靜置於+25°C（室溫）環境中 1 小時後，測試後無任何障礙防礙正常操作。且在輸入 2.0V 正弦波從 Fo 到 6KHz 之間無異常音。Fo 與原規格值相同，輸出音壓變化量在±3dB 內。

TEST CONDITION.

Standard Test Condition :	a) Temperature : +5 ~ +35°C	b) Humidity : 45-85%	c) Pressure : 860-1060mbar
一般測試條件 :	a) 溫度 : +5 ~ +35°C	b) 濕度 : 45-85%	c) 氣壓 : 860-1060mbar
Judgement Test Condition	a) Temperature : +25 ± 2°C	b) Humidity : 60-70%	c) Pressure : 860-1060mbar
爭議時測試條件:	a) 溫度 : +25 ± 2°C	b) 濕度 : 60-70%	c) 氣壓 : 860-1060mbar

J. PACKING STANDARD 包裝規格

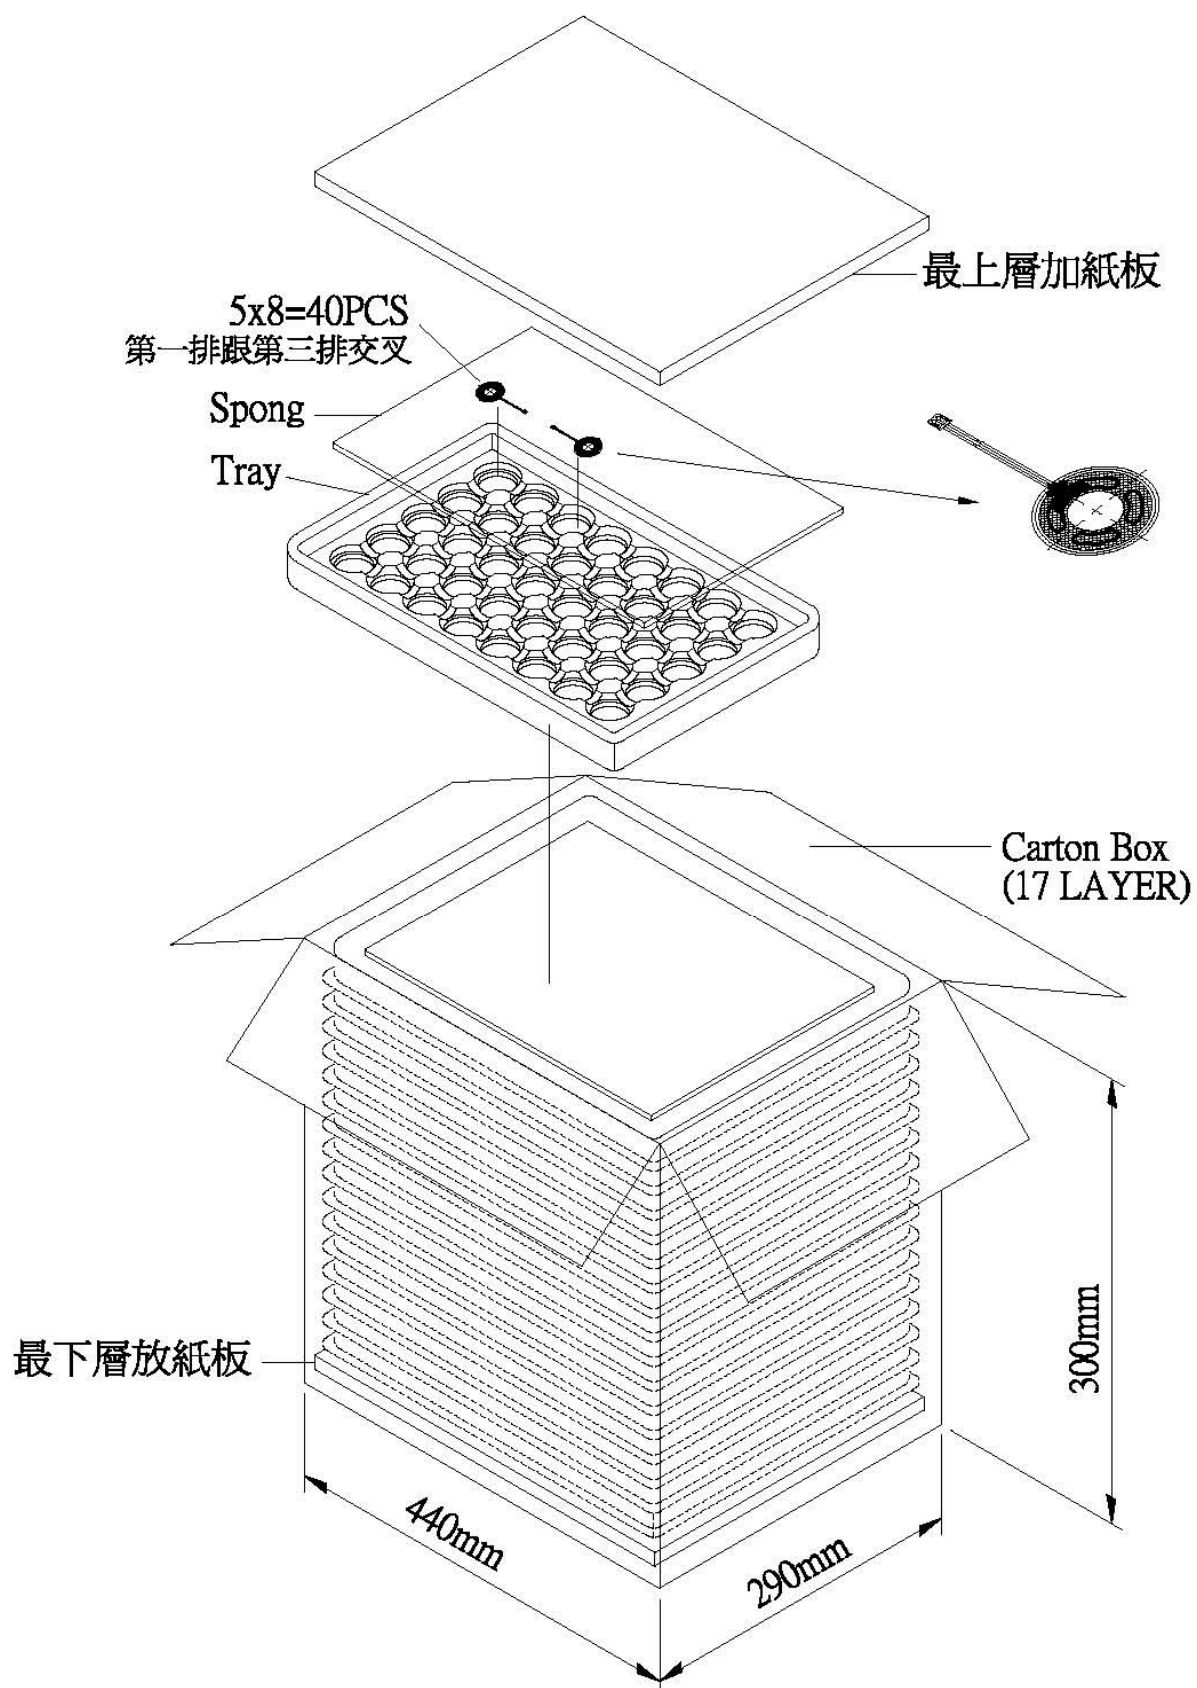

Paper Plate	420mmx270mmx22mm	1x40PCS=40PCS
Carton Box	440mmx290mmx300mm	40PCSx17=680PCS