


RoHS
IP66

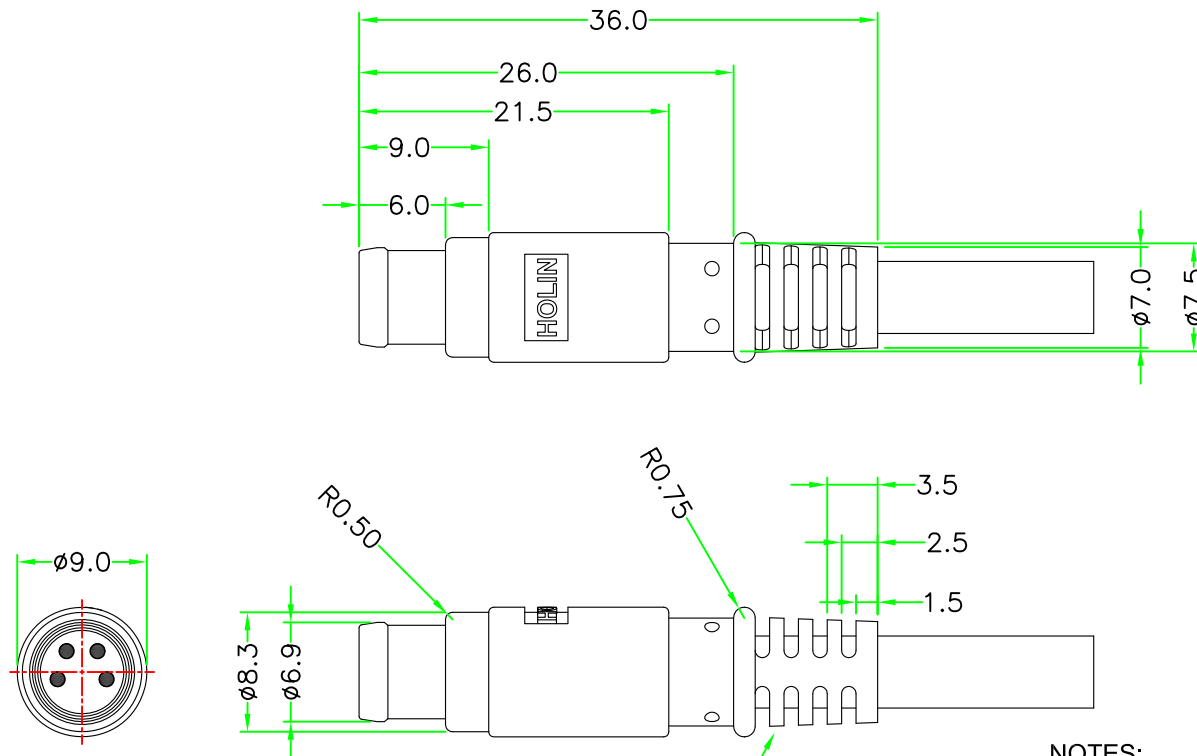

網筋需有脫模斜度

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 3A / 1A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-N1xxSM


02 - 2 PIN 03 - 3 PIN

04 - 4 PIN 06 - 6 PIN

D - CURRENT RATING 3A

I - CURRENT RATING 1A

*Cable specification and length can be customized.

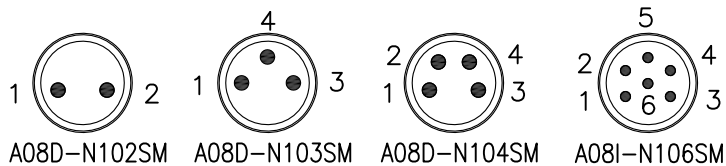

PIN ASSIGNMENT FRONT VIEW
(前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE	M8 A Coding Male Molded Cable Ass'y
SCALE	2:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°	P/N:	A08x-N1xxSM
REV. A	SHEET 1/1	DWG.NO: A08x-N1xxSM
		DR. SIBYL CH. ERIC AP.

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	M08 A Coding Male Connector Insert. NYLON+GF.	BLACK	1	(249-135)
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS