


Dept Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information for any purpose without the prior written consent of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

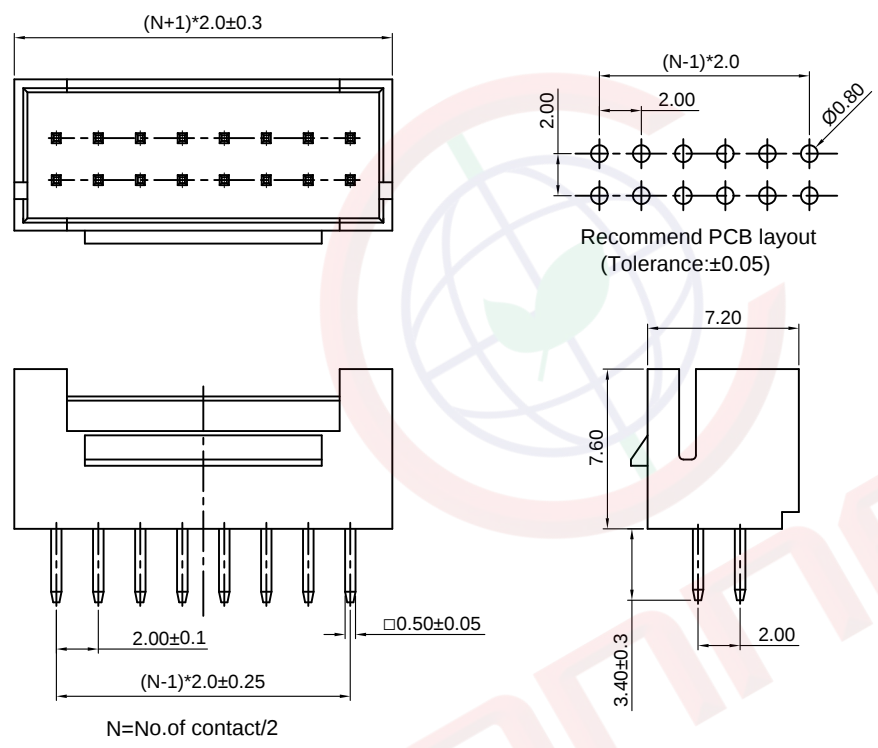

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/27/16'	HZW 07/27/16'	LJC 07/27/16'
B	DRAWING UPDATE	JLZ 08/09/18'		

NOTES:

1. Main specifications
 - . Housing material: Nylon 66
 - . Contact material: Copper Alloy
 - . Rated voltage: 125V
 - . Rated current: 2.0A
 - . Contact resistance: 30mΩ Max
 - . Insulation resistance: 1000MΩ Min
 - . Withstanding voltage: 500V,AC 1 minute
 - . Temperature range: -25 ~ +85°C
 - . Recommend PC board thickness:1.6mm

2. Product number code:


DS1066-10 - X X X X X X

- Contact type
X: W/O Kink
- Housing Color
V: Ivory
- Contact Plating
6: Tin
- Mounting type
V: V/T type
- Connector type
M: Male
- No.of contact
2x2-2x20

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.0mm Wafer PHB V/T TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1066-10 SERIES
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 3				
DRAWING NO.	C-DS1066-10-XXXXXX-B						

Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, is prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

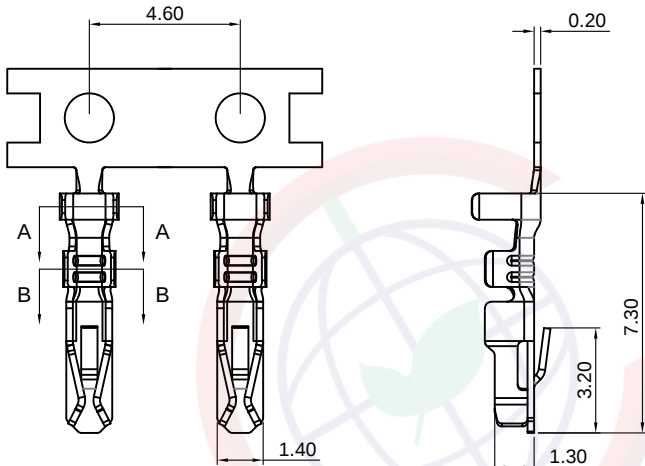

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	3 OF 3
DRAWING NO.	C-DS1066-10-XXXXXX-B		

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/27/16'	HZW 07/27/16'	LJC 07/27/16'
B	DRAWING UPDATE	JLZ 08/09/18'		

- NOTES:
- Main specifications
 - Housing material: Copper Alloy
 - Rated voltage: 125V
 - Rated current: 2.0A
 - Contact resistance: 30mΩ Max
 - Insulation resistance: 1000MΩ Min
 - Withstanding voltage: 500V,AC 1 minute
 - Temperature range: -25 ~ +85°C
 - Product number code:
T- DS1066-10 - S C 6 0 0
Plating type
6: Tin

PROJECTION		TITLE	
UNITS	mm	2.0mm Terminal PHB TYPE	
SHEET SIZE	A4	SERIES	DS1066-10 SERIES
 晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			