



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 707 MHz BW 18 MHz CSP 1.1x0.9 mm

TST Parts No.: TA2650A

Customer Part No.: _____

Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Michael Yang *Michael*

Approved by: _____ Andy Yu *Andy Yu*

Date: _____ 2021/08/02

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.

SAW Filter 707 MHz BW 18 MHz CSP 1.1x0.9 mm

MODEL NO.: TA2650A

REV. No.:2.0

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitive Level: Level 3 (MSL3)



Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Terminating source impedance: $Z_s = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$


Item	Unit	Min.	Type.	Max.
Center Frequency	MHz	-	707	-
Insertion Loss (698 ~ 716 MHz)	dB	-	2.0	3.0
Amplitude ripple (698 ~ 716 MHz)	dB	-	0.6	1.5
Return Loss (698 ~ 716 MHz)	dB	10	18	-
Attenuation				
10 ~ 650 MHz	dB	45	50	-
650 ~ 685 MHz	dB	20	24	-
729 ~ 746 MHz	dB	8	14	-
1386 ~ 1442 MHz	dB	40	48	-
1574 ~ 1577 MHz	dB	38	46	-
2084 ~ 2158 MHz	dB	30	40	-
2782 ~ 2874 MHz	dB	25	36	-
Temperature Coefficient of Frequency	ppm/C°	-	-36	-

C. Frequency Characteristics:


Span 400 MHz

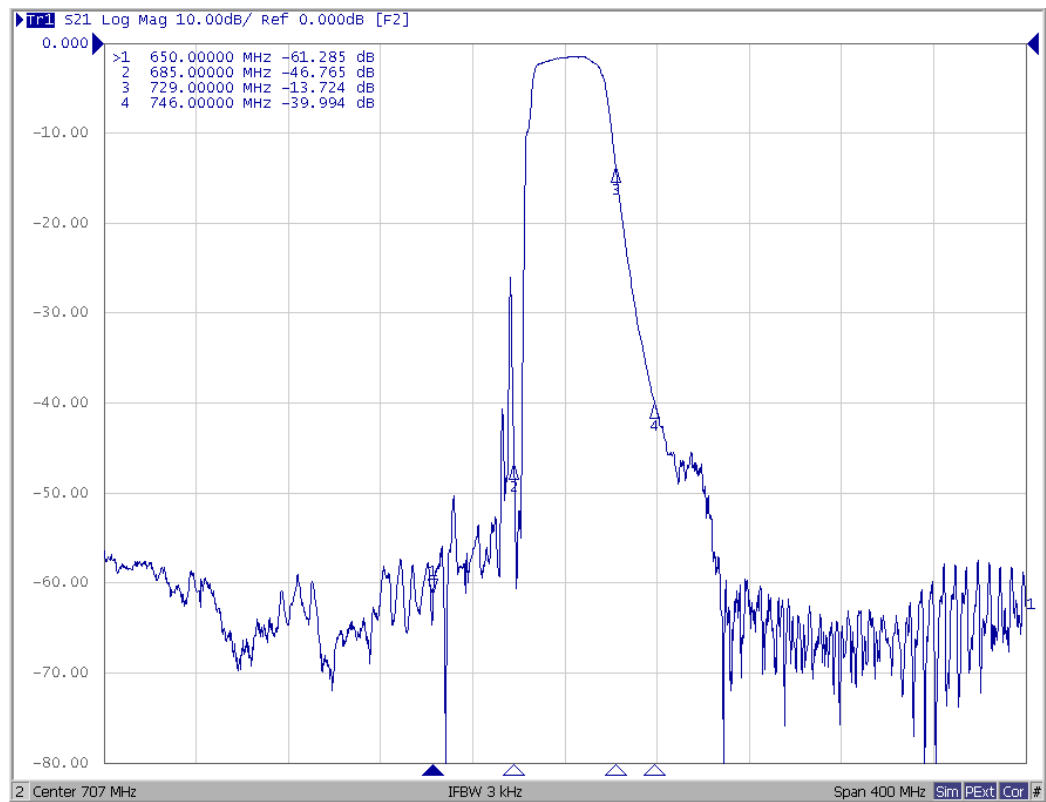


Span 8000 MHz

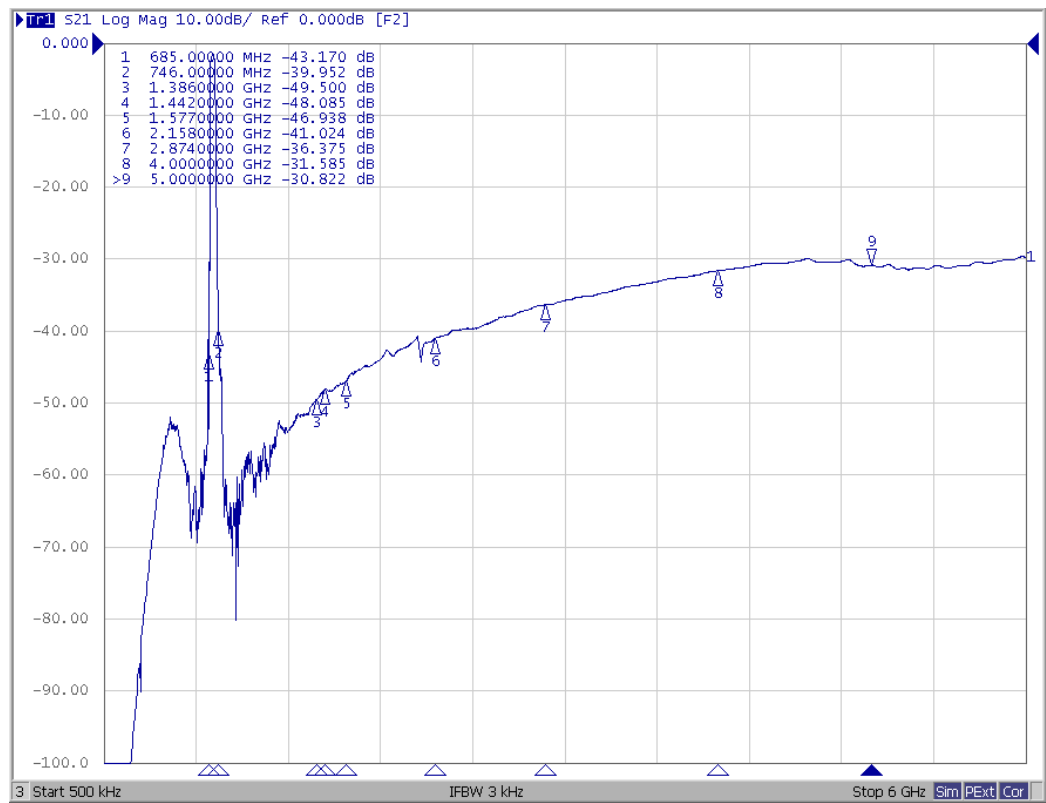


Ripple Span 100 MHz

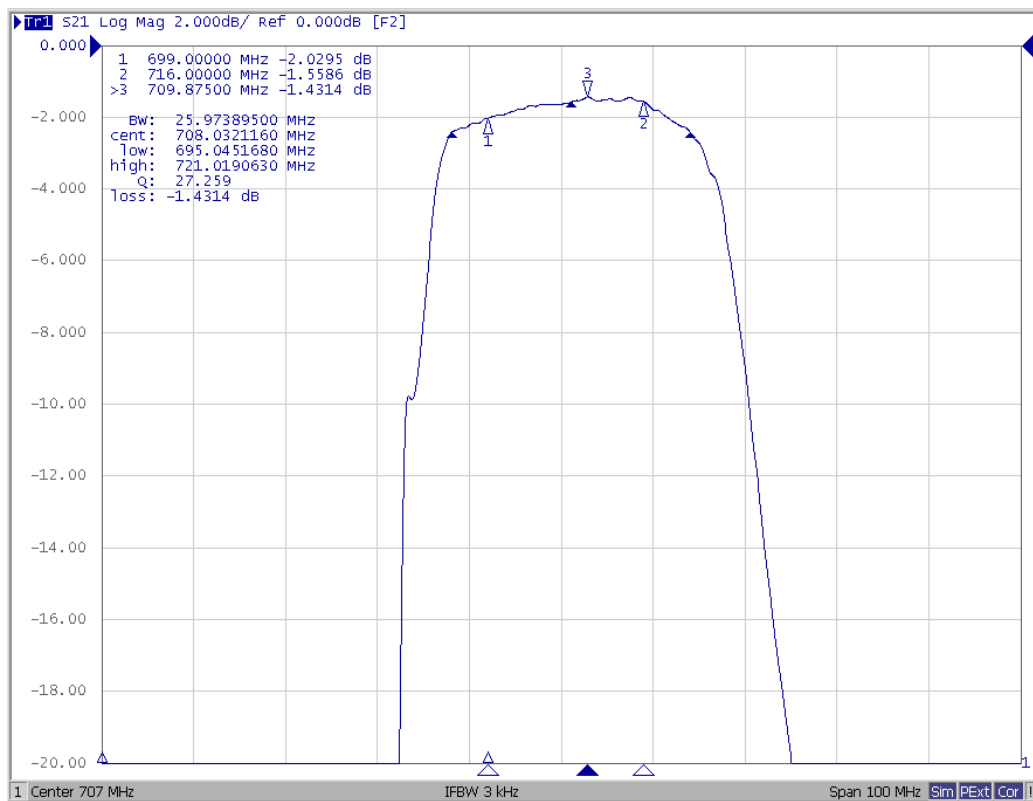

Reflective Characteristic

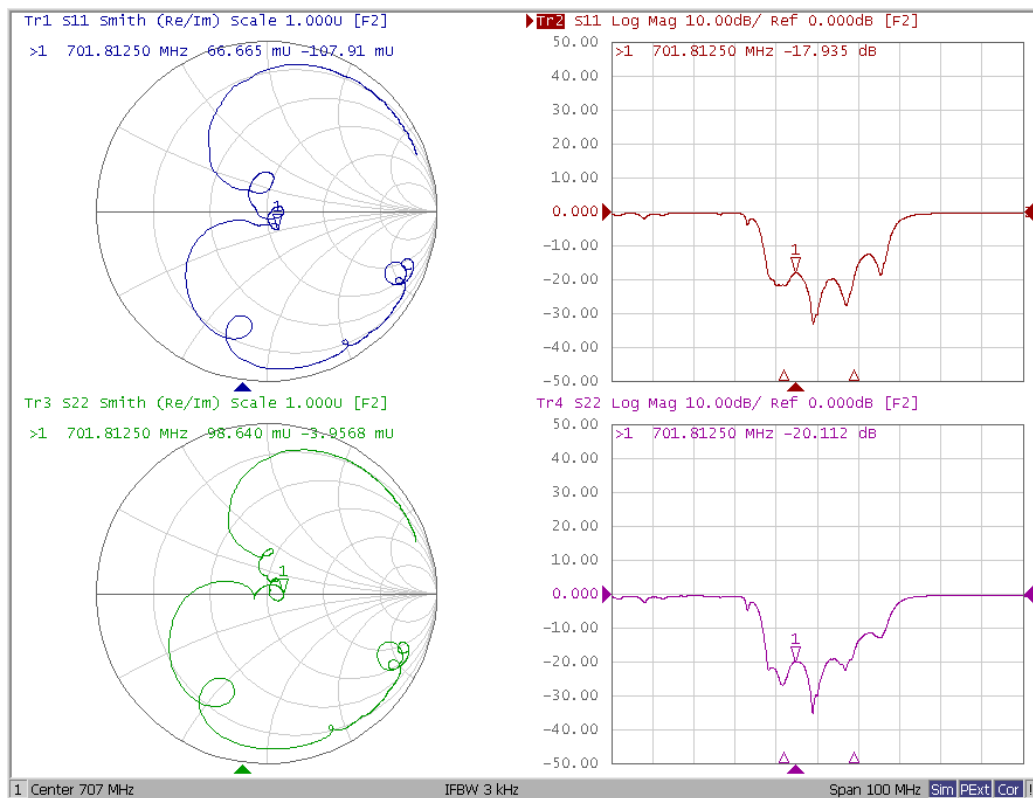

D. OUTLINE DRAWING:

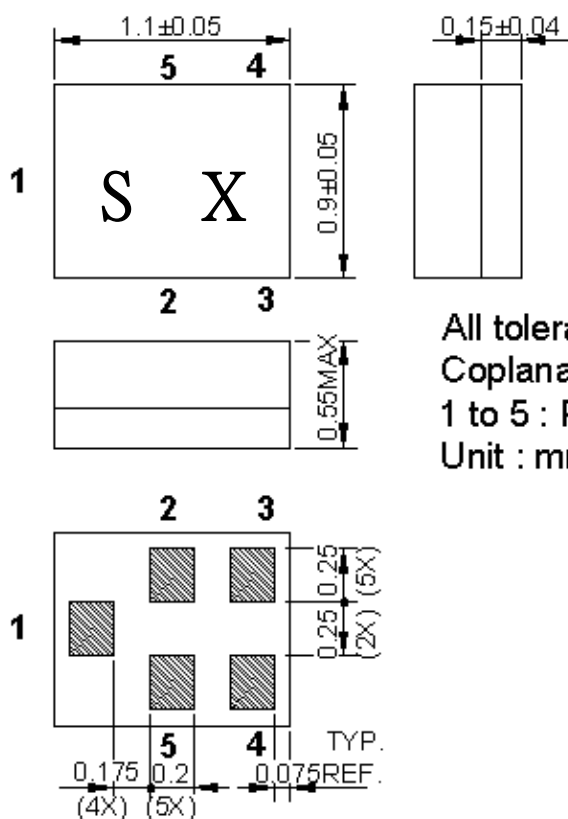

All tolerances are ± 0.05 mm unless otherwise specified
Coplanarity : 0.1 mm max.

1 to 5 : Pin No.

Unit : mm

Marking Descriptions	
S	Series Number
X	Date Code(Year+Month)


Pin Description	
2, 3, 5	Ground
1	Input
4	Output

X : Year/Month Code (Follow the table)


YEAR/Month	1	2	3	4	5	6	7	8	9	10	11	12
2021	A	B	C	D	E	F	G	H	J	K	L	M
2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2023	a	b	c	d	e	f	g	h	j	k	l	m
2024	n	p	q	r	s	t	u	v	w	x	y	z
2025	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>	<u>J</u>	<u>K</u>	<u>L</u>	<u>M</u>
2026	<u>N</u>	<u>P</u>	<u>Q</u>	<u>R</u>	<u>S</u>	<u>T</u>	<u>U</u>	<u>V</u>	<u>W</u>	<u>X</u>	<u>Y</u>	<u>Z</u>
2027	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>	<u>g</u>	<u>h</u>	<u>i</u>	<u>k</u>	<u>l</u>	<u>m</u>
2028	<u>n</u>	<u>p</u>	<u>q</u>	<u>r</u>	<u>s</u>	<u>t</u>	<u>u</u>	<u>v</u>	<u>w</u>	<u>x</u>	<u>y</u>	<u>z</u>

E. MEASUREMENT CIRCUIT:

Bottom View

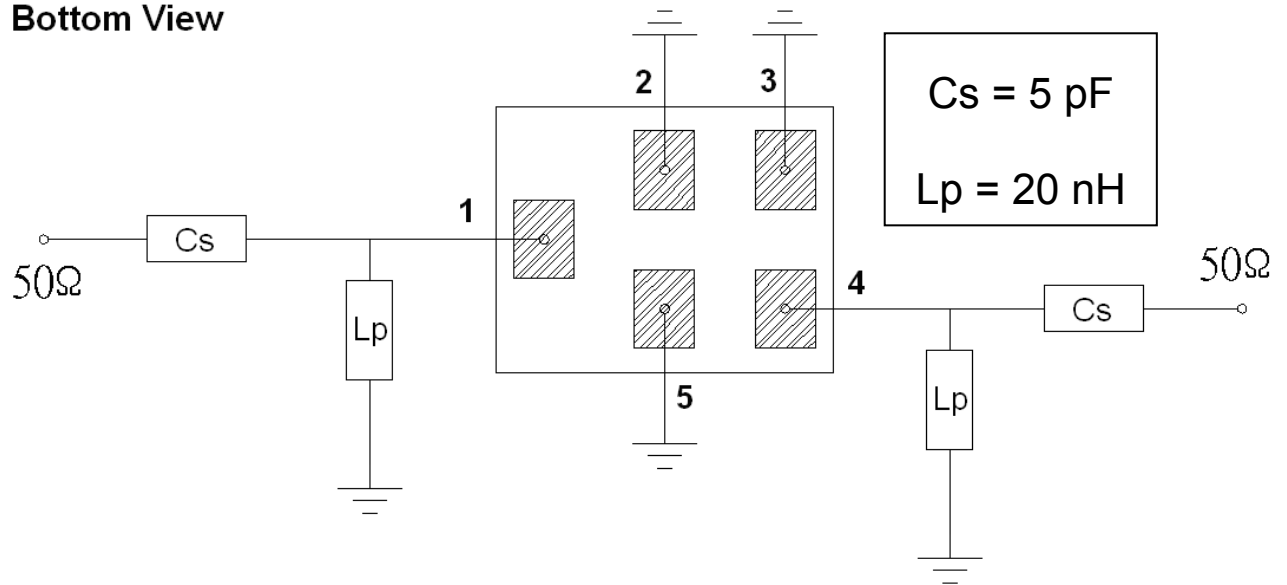

F. PCB Footprint:

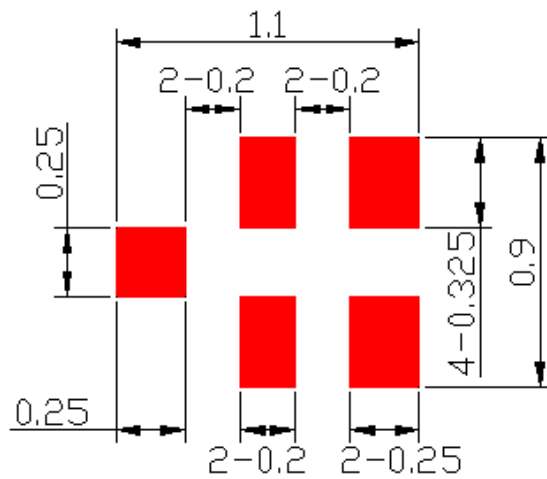


: Land Pattern

Unit: mm


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

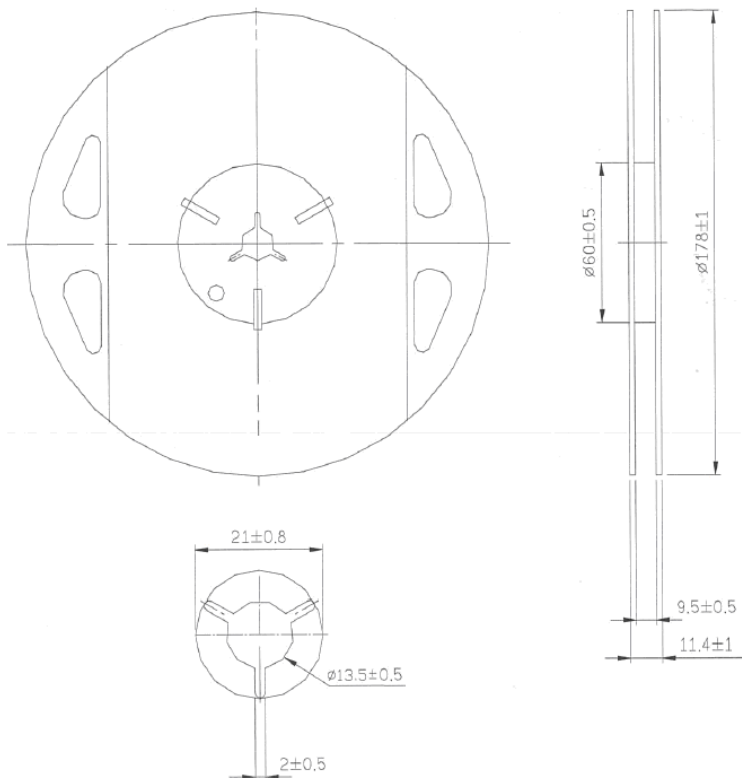

2. TAPE DIMENSION

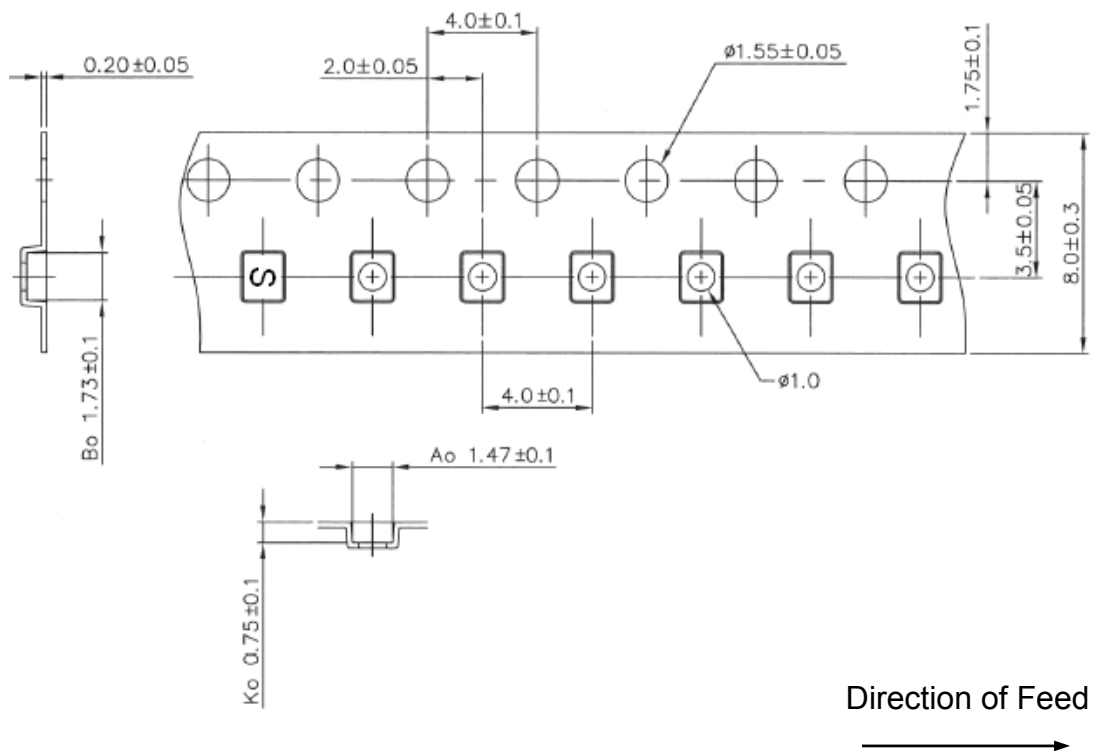

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

