


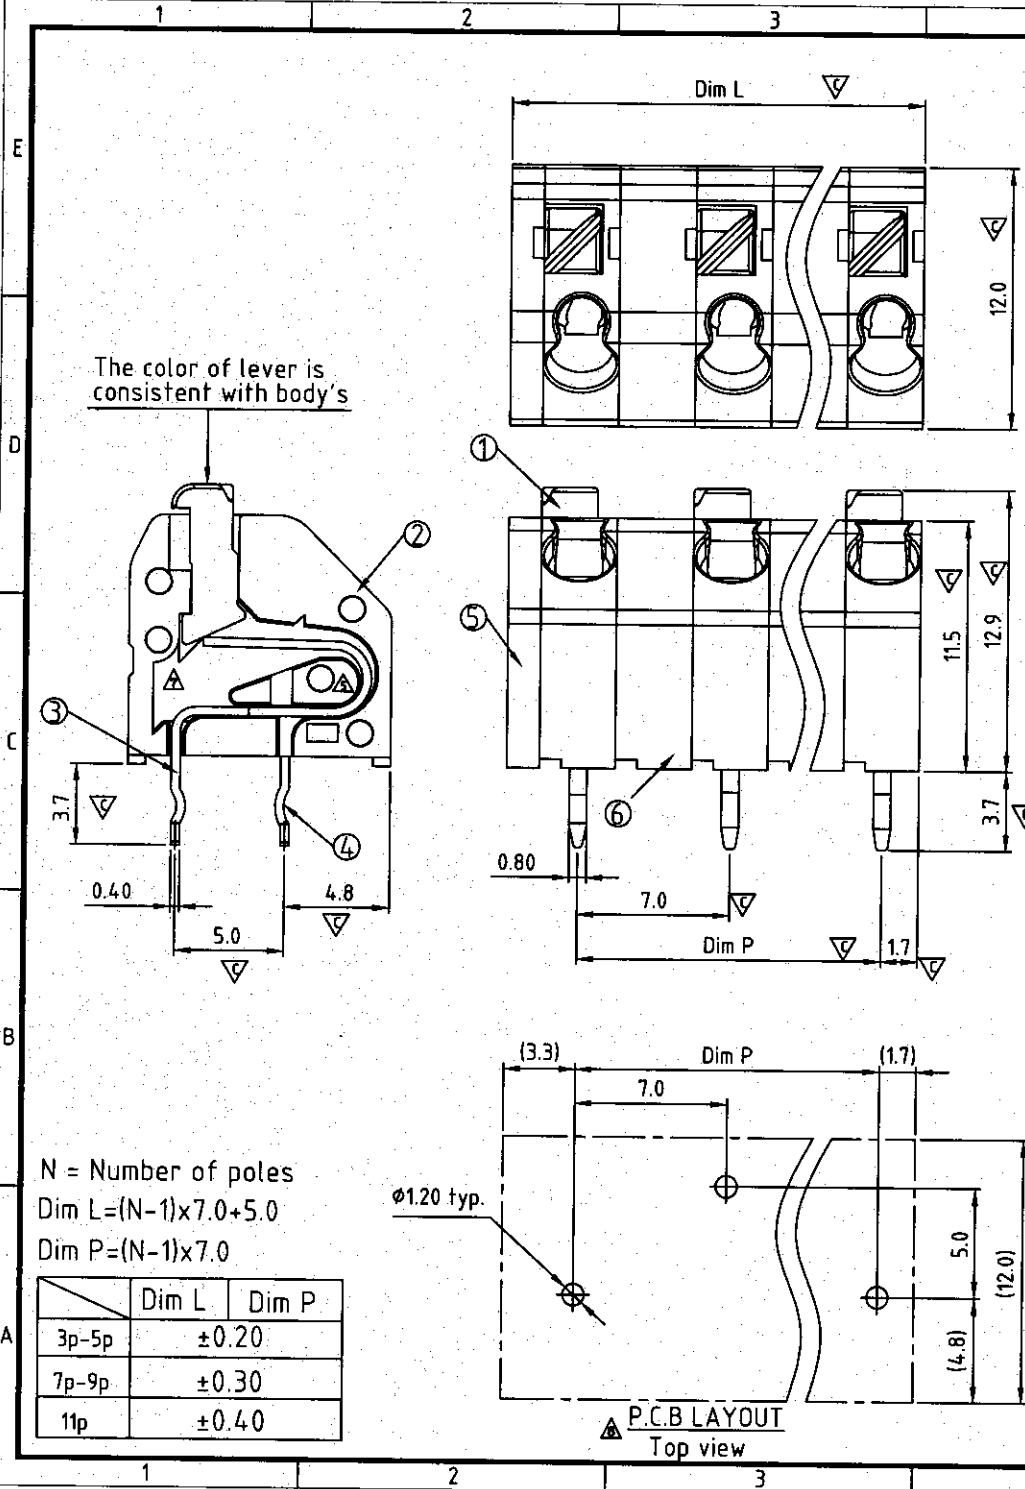


SIGN	DATE	DESCRIPTION	APPROVER
△	01/26/07	The Soldering temperature from 245° to 250°	Aaron
△	01/26/07	Add "VDE" stipulation	Aaron
△	12/25/08	Add "TUV" stipulation	Tony
△	5/06/10	Electrical changed	Runner
△	6/03/10	Structure changed	Cheng Bo
△	12/25/10	How to order is changed	Runner
△	6/25/12	Plastic core material reduced	Guoxue
△	12/28/13	update the drawing	Da cheng

Material:

- Item ① Insulator(lever): Thermoplastic (UL94V-0)
- Item ② Insulator(housing): Thermoplastic (UL94V-0)
- Item ③ Side contact pin: PhBz.Tin plated.
- Item ④ Center contact pin: PhBz.Tin plated.
- Item ⑤ Side Cover : Thermoplastic (UL94V-0)
- Item ⑥ Insulator(Board): Thermoplastic (UL94V-0)

- Electrical: cULus VDE
- Voltage rating: 300V 250V
- Current rating: 6A 6A
- Wire range: 0.5-0.75 mm²
- Solid wire(AWG): 16-22
- Stranded wire(AWG): 16-22
- Wire strip length: 8.5-10.0mm
- Withstanding Voltage: 1.6KV 2 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C ±5°C/5 Sec
- Safety Approval:
- Critical dimension:

- HC xx 10 x 0 xxx G RoHS compliant (lead<4%) In copper Alloy
- △ NO of poles
- 03 3 poles
- 05 5 poles
- 11 11 poles
- △ Body Color
- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange (RAL2011/P)
- 4 Yellow (RAL1018/A)
- 5 Green (RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey (RAL7004/P)
- 9 White (RAL1102)
- C Multiple colors
- 0000 Standard @ Logo
- 000A Standard ANY Logo
- Any special item by customer request, please contact sales department.

ANYTEK				CUSTOMER COPY				
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD				
TITLE	HC - 7.0mm Series 車殼P							
PART NO.	HCxx10x0xxxxG			DWG NO.	8HC0201			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Da cheng 2013.12.28	Da cheng 2013.12.28		UNIT: mm		X. ±0.50	
					SCALE: NONE		X.X ±0.30	
					SHEET: 01/01		REV: 1	X.XX ±0.10
								X° ±1°