



UT2P06

Power MOSFET

-2.0A, -60V (D-S) P-CHANNEL POWER MOSFET

DESCRIPTION

The UTC **UT2P06** is a P-channel enhancement power MOSFET using UTC's advanced technology to provide the customers with perfect $R_{DS(ON)}$ and low gate charge.

This UTC **UT2P06** can be operated with -4.5V low gate voltage.


FEATURES

* $R_{DS(ON)} \leq 0.4 \Omega$ @ $V_{GS} = -10V$, $I_D = -0.9A$

$R_{DS(ON)} \leq 0.6 \Omega$ @ $V_{GS} = -4.5V$, $I_D = -0.8A$

* High switching speed

SYMBOL



ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UT2P06L-AB3-R	UT2P06G-AB3-R	SOT-89	G	D	S	Tape Reel
UT2P06L-AA3-R	UT2P06G-AA3-R	SOT-223	G	D	S	Tape Reel
UT2P06L-AE2-R	UT2P06G-AE2-R	SOT-23-3	G	S	D	Tape Reel
UT2P06L-AE3-R	UT2P06G-AE3-R	SOT-23	G	S	D	Tape Reel

Note: Pin Assignment: G: Gate S: Source D: Drain

UT2P06G-AB3-R (1) Packing Type (2) Package Type (3) Green Package		(1) R: Tape Reel (2) AA3: SOT-223, AB3: SOT-89, AE2: SOT-23-3, AE3: SOT-23 (3) G: Halogen Free and Lead Free, L: Lead Free
---	--	---

MARKING

SOT-89	SOT-23-3 / SOT-23	SOT-223
1 □□□□ → Date Code UT2P06 → L: Lead Free G: Halogen Free	1 □□□□ → Date Code 2P06 → L: Lead Free G: Halogen Free	1 UT2P06 → L: Lead Free G: Halogen Free □□□□ → Date Code

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT
Drain-Source Voltage			V_{DS}	-60	V
Gate-Source Voltage			V_{GS}	± 20	V
Drain Current	Continuous		I_D	-2	A
	Pulsed		I_{DM}	-6.03	A
Avalanche Current ($L=0.1\text{mH}$)			I_{AR}	-7	A
Power Dissipation (Note 1, 2)	(Note 4a)	SOT-23-3 SOT-23	P_D	0.5	W
	(Note 4b)	SOT-23-3 SOT-23		0.46	W
Power Dissipation (Note 1, 2)		SOT-89		0.7	W
		SOT-223		3.0	W
Junction Temperature			T_J	+150	$^{\circ}\text{C}$
Storage Temperature			T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.


2. Surface Mounted on FR4 Board.

3. $t \leq 5$ sec.

4. θ_{JA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. θ_{JC} is guaranteed by design while θ_{CA} is determined by the user's board design.



a. 250°C/W when mounted on a 0.02 in² pad of 2 oz. copper.



b. 270°C/W when mounted on a minimum pad.

Scale 1 : 1 on letter size paper

■ THERMAL DATA (NOTE.)

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	θ_{JA}	41.6	$^{\circ}\text{C/W}$
	SOT-23-3		320	$^{\circ}\text{C/W}$
	SOT-23			
	SOT-89		178	$^{\circ}\text{C/W}$

Note: Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$. The pulse current is limited by the maximum junction temperature.

ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}\text{C}$, unless otherwise specified)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =-250μA, V _{DS} =0V	-60			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =-60V, V _{GS} =0V			-0.5	μA
Gate- Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =-250μA	-1.0		-3.0	V
Static Drain-Source On-State Resistance (Note 1)		R _{DS(ON)}	V _{GS} =-10V, I _D =-0.9A			0.4	Ω
			V _{GS} =-4.5V, I _D =-0.8A			0.6	Ω
DYNAMIC PARAMETERS							
Input Capacitance (Note 3)		C _{ISS}	V _{GS} =0V, V _{DS} =-25V, f=1.0MHz		545		pF
Output Capacitance (Note 3)		C _{OSS}			43		pF
Reverse Transfer Capacitance (Note 3)		C _{RSS}			31		pF
SWITCHING PARAMETERS (Note 2)							
Total Gate Charge (Note 3)		Q _G	V _{GS} =-10V, V _{DS} =-48V, I _D =-2A I _G =-1mA		12.5		nC
Gate to Source Charge (Note 3)		Q _{GS}			2.4		nC
Gate to Drain Charge (Note 3)		Q _{GD}			2		nC
Turn-ON Delay Time (Note 2, 3)		t _{D(ON)}	V _{DD} =-30V, V _{GS} =-10V, I _D =-2A, R _G ≈6Ω		5		ns
Rise Time (Note 2, 3)		t _r			16		ns
Turn-OFF Delay Time (Note 2, 3)		t _{D(OFF)}			19		ns
Fall-Time (Note 2, 3)		t _f			18		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS (Note 2)							
Maximum Body-Diode Continuous Current		I _S	T _A =25°C (Note 2)			-1.42	A
Maximum Body-Diode Pulsed Current		I _{SM}	T _A =25°C (Note 3)			-6.03	A
Drain-Source Diode Forward Voltage (Note 1)		V _{SD}	I _S =-0.8A, V _{GS} =0V		-0.85	-0.95	V

Notes: 1. Measured under pulsed conditions. Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.


2. Switching characteristics are independent of operating junction temperature.

3. For design aid only, not subject to production testing.

■ TEST CIRCUITS AND WAVEFORMS

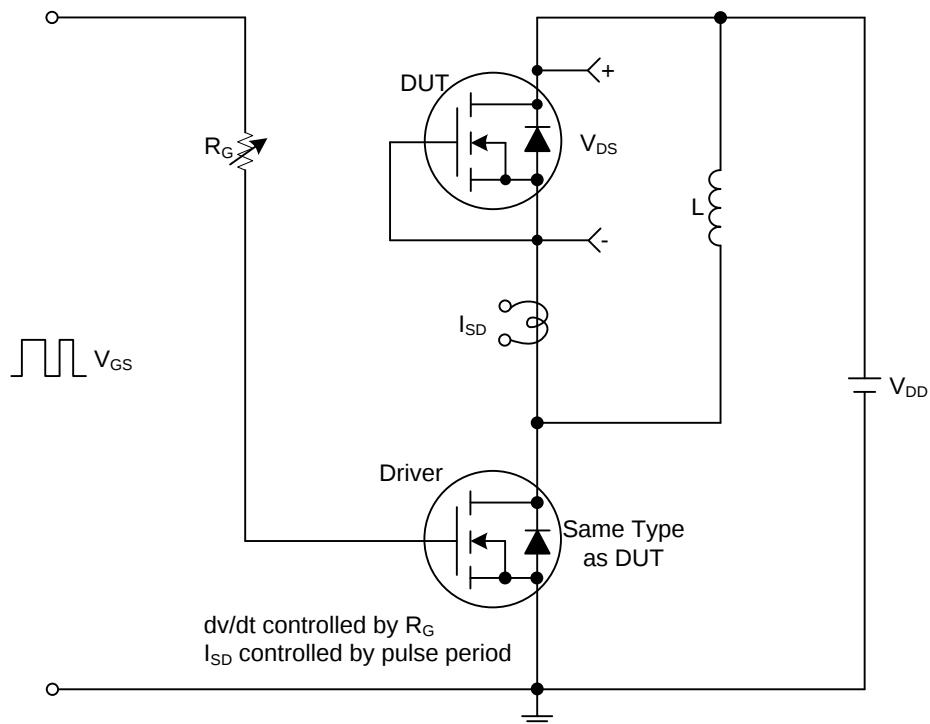


Peak Diode Recovery dv/dt Test Circuit

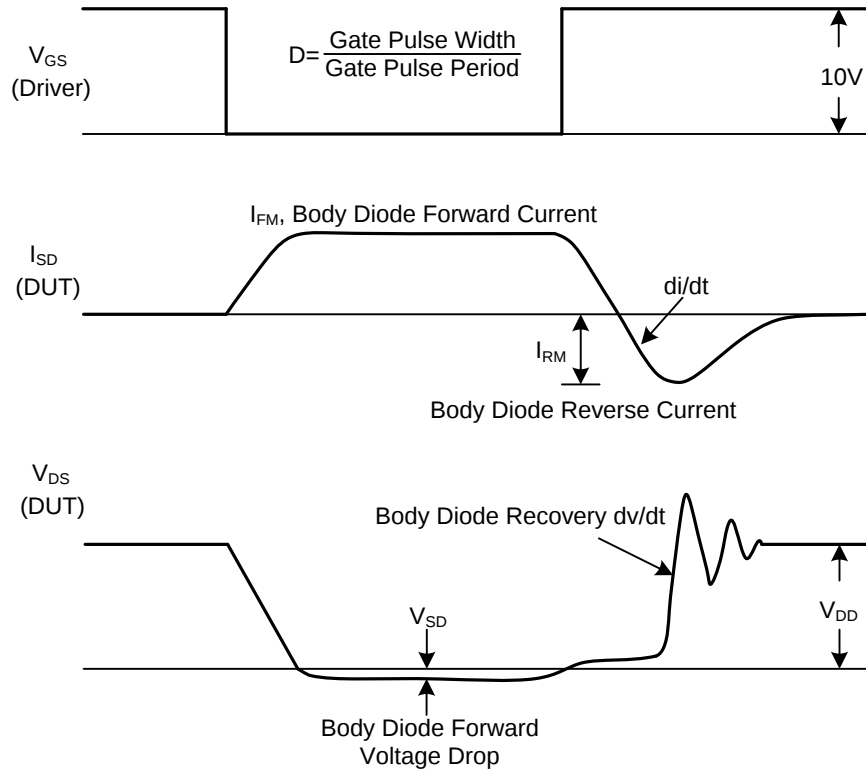


Peak Diode Recovery dv/dt Test Circuit and Waveforms

Peak Diode Recovery dv/dt Waveforms


TEST CIRCUITS AND WAVEFORMS

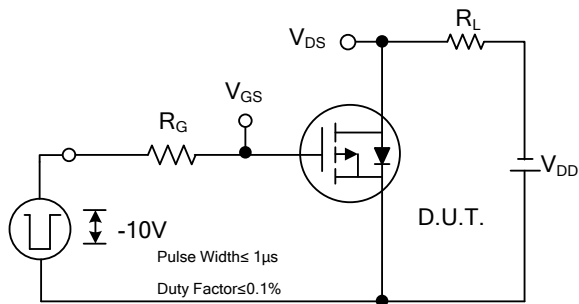


Switching Test Circuit

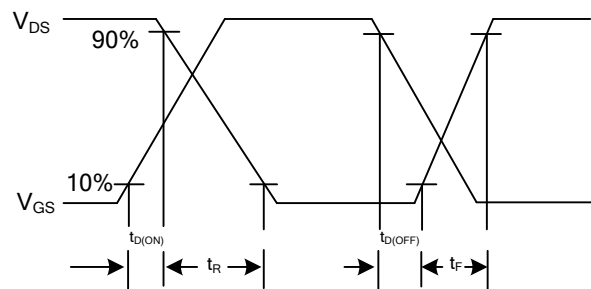


Switching Waveforms

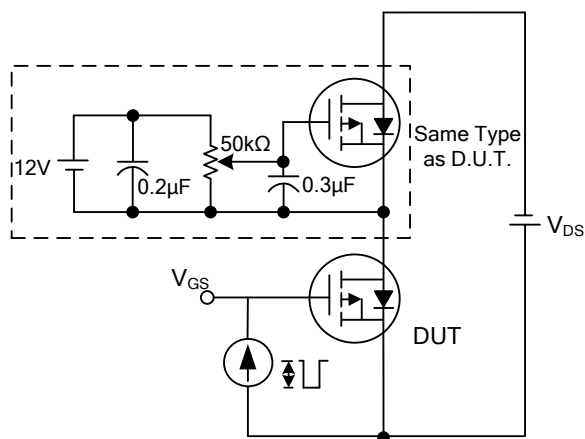


Gate Charge Test Circuit

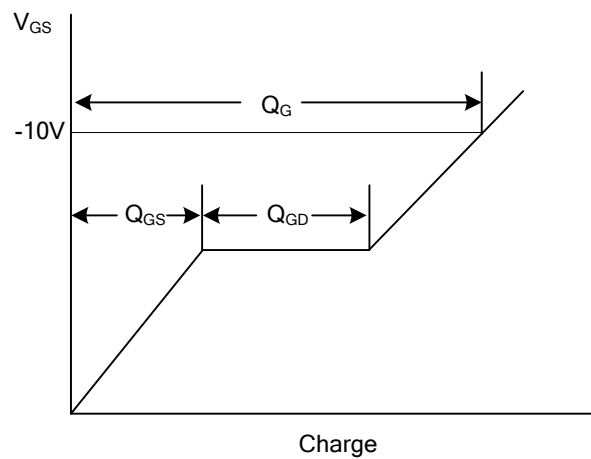

Gate Charge Waveform






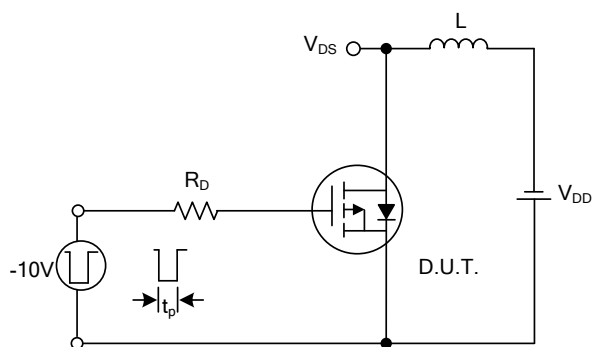


Unclamped Inductive Switching Test Circuit






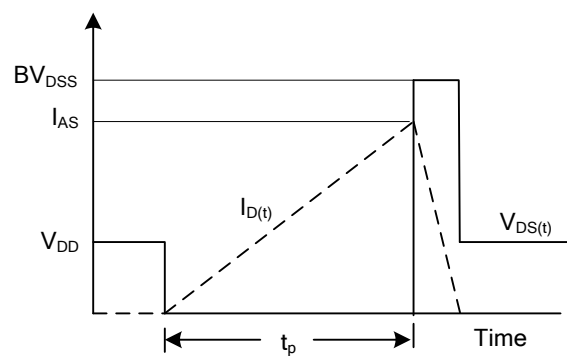


Unclamped Inductive Switching Waveforms



TYPICAL CHARACTERISTICS

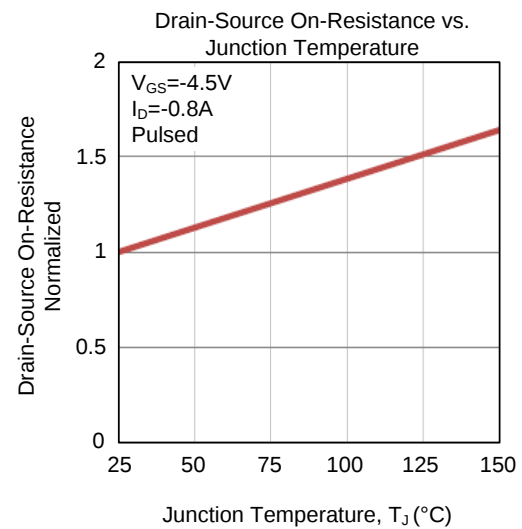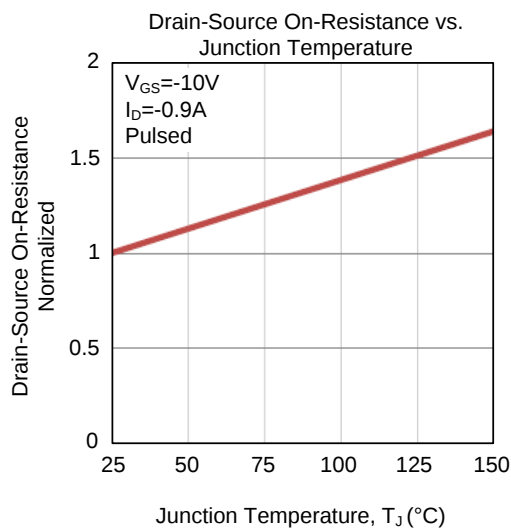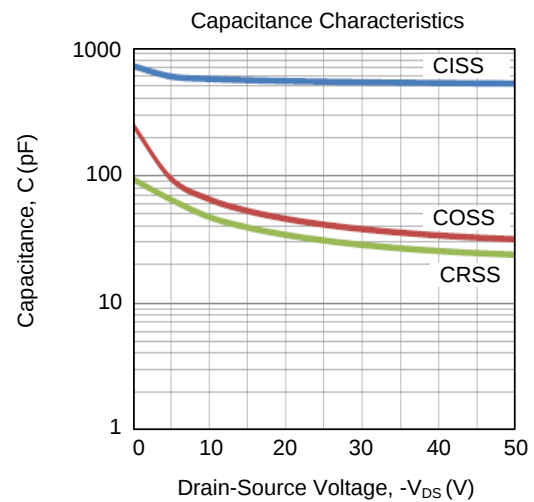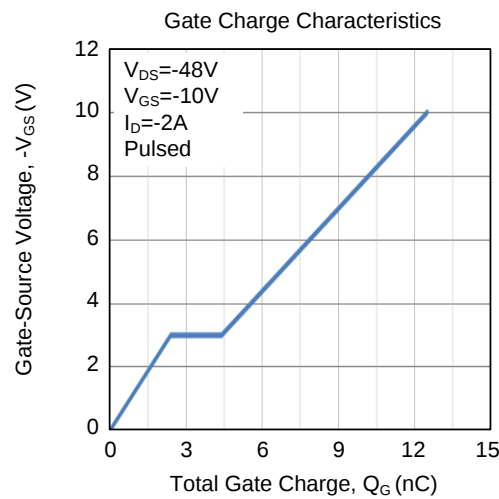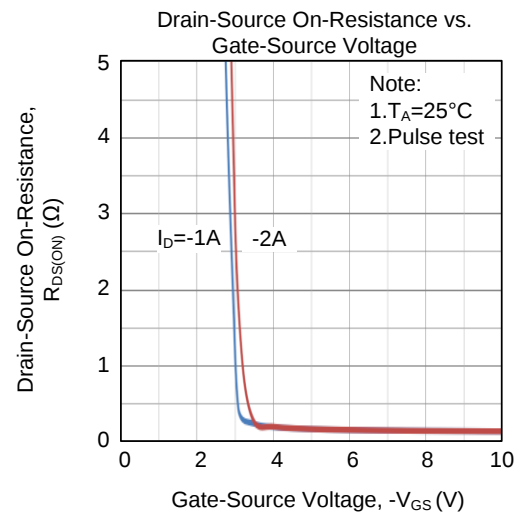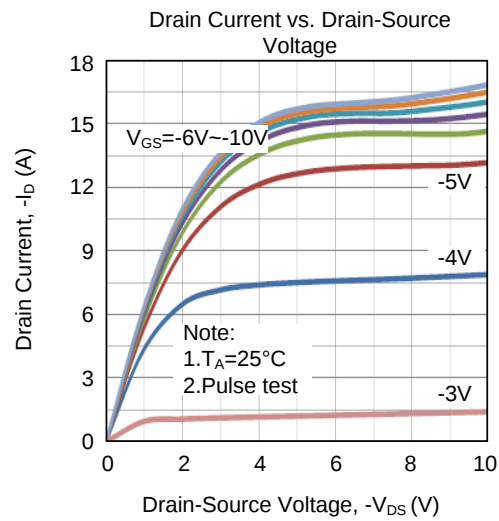

■ TYPICAL CHARACTERISTICS (Cont.)

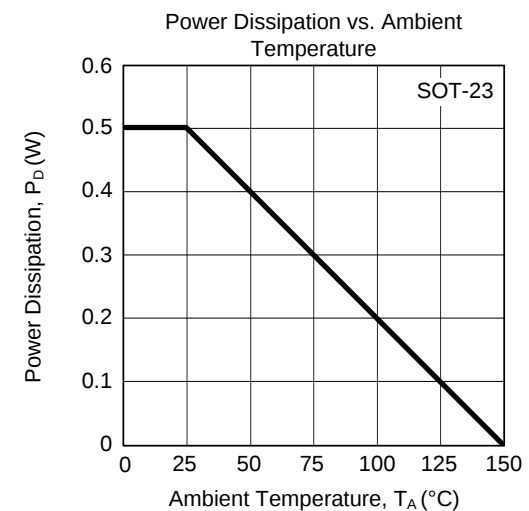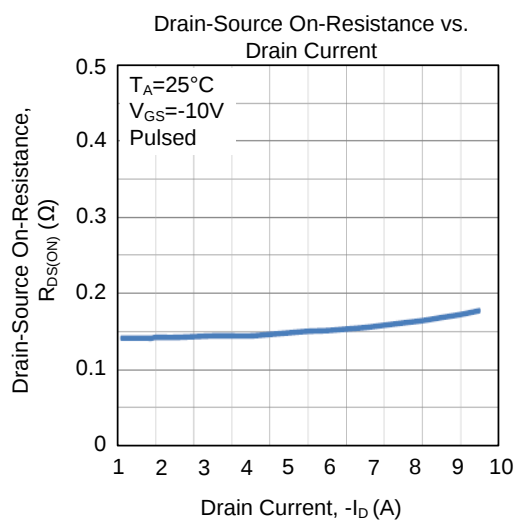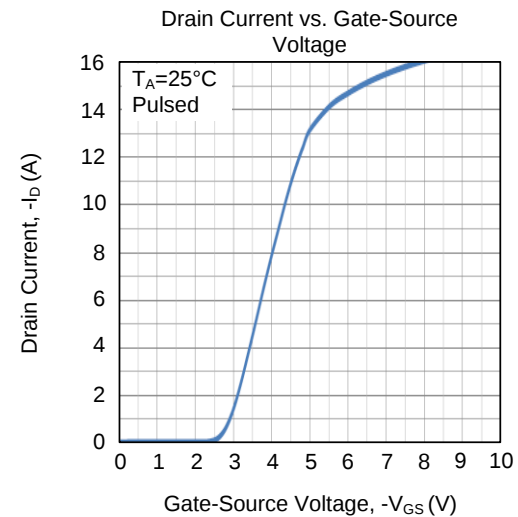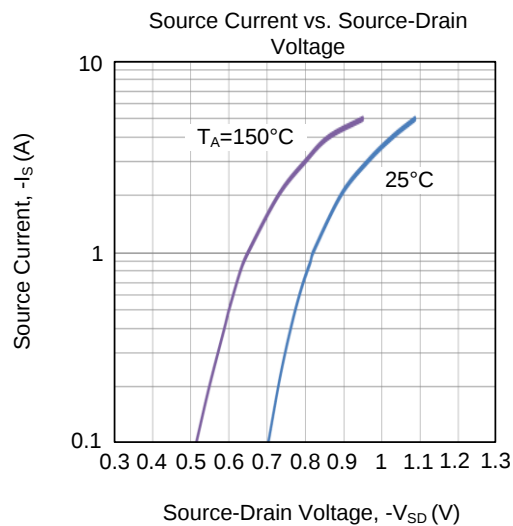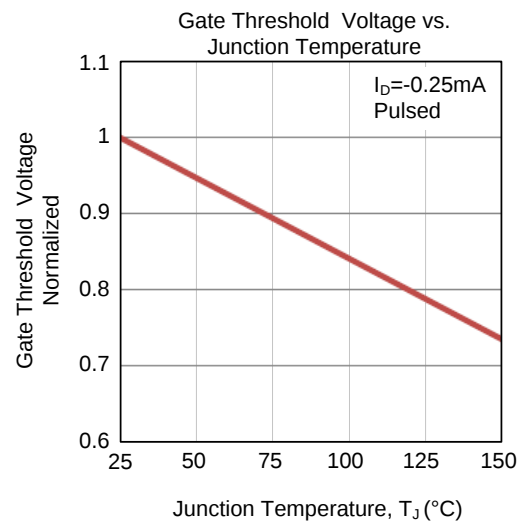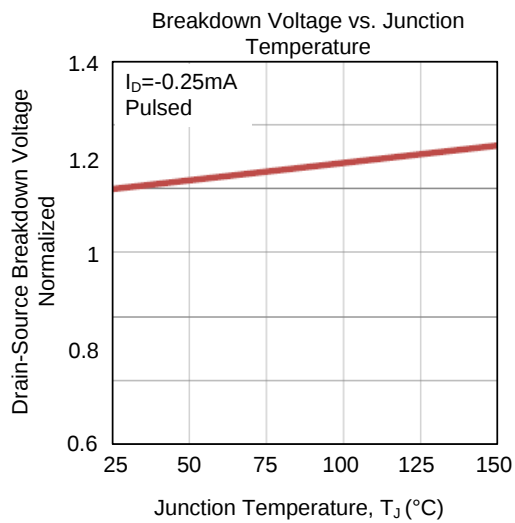

■ TYPICAL CHARACTERISTICS (Cont.)

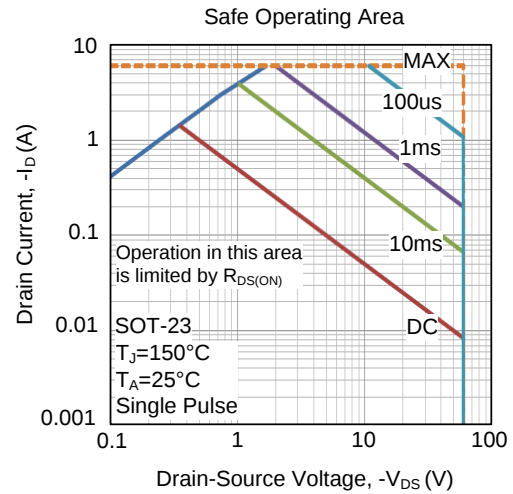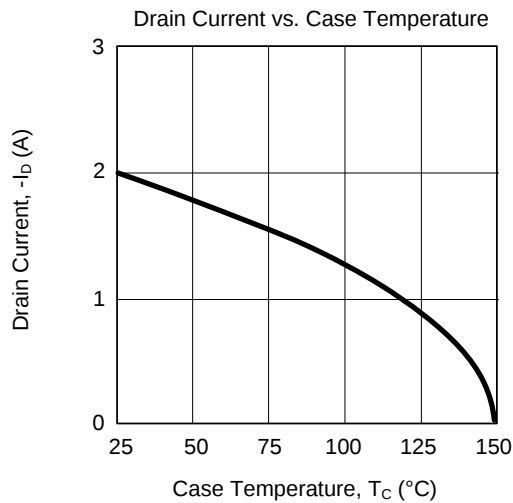

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.