


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.08.08	The Solid wire,Operating temperature and Stranded wire are changed	Jacke
△	2009.08.08	Add UL standard	Jacke
△	2009.08.08	Add the tolerance table	Jacke
△	2010.02.07	The workmanship is changed.	Jacke
△	2010.03.29	The design is changed	Jacke
△	2010.04.16	The dimension is changed	Jacke
△	05/09-16	change the withdrawal force specification & update the drawing	Evan
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating “-” slot type
- △●Item c Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item d Terminal (housing) : Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- △●Solid wire(AWG): 12-26
- △●Stranded wire(AWG): 12-26
- Torque: 3.5Lb-In
- Screw: M3.0
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △●Operating temperature:-40°C to+115°C
- △●Safeyt Approval:    △ 100 - 550gf /pole
- Use with OP Ø1.3mm pin, Withdrawal force: ~~200~~ 500gf /pole

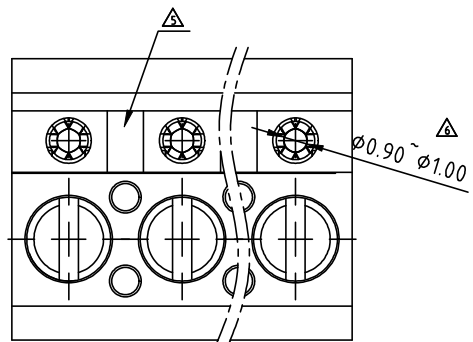

TX xx 01x0 xxxx G



02 2 Pole
03 3 Pole
...
24 24 Pole

COLOR

0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

000 0 Standard @ Logo
000 A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

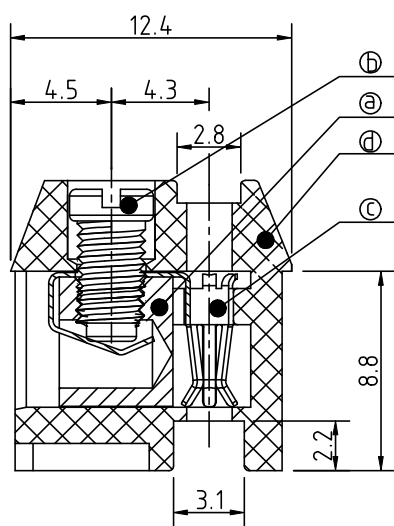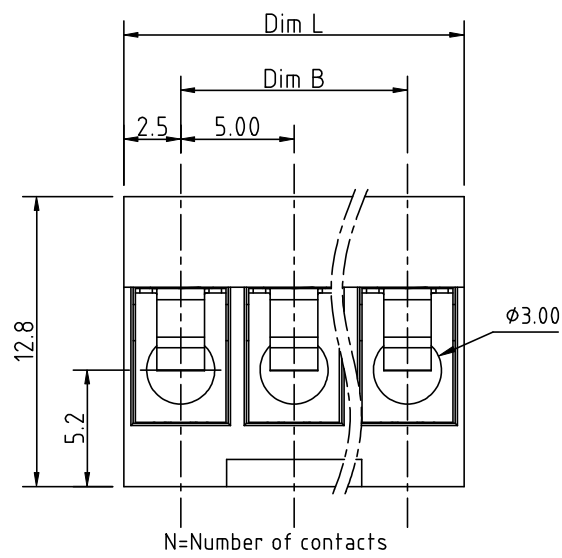

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.0
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.0
TOL	±0.10				±0.15				±0.20			
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	70.0	75.0	80.0	85.0	90.0	95.0	100.0	105.0	110.0	115.0	120.0	
Dim B	65.0	70.0	75.0	80.0	85.0	90.0	95.0	100.0	105.0	110.0	115.0	
TOL	±0.25				±0.30				±0.40			

Amphenol
ANYTEK

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE TX-5.0mm Series “-” Solid Block Type				
PART NO. TXxx01x0xxxxG		DWG NO. 8TX0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Evan 05/09-16	Jacke 2010.02.07	  
SHEET: 01/01		REV.: H		

UNIT: mm	X. ±0.50
SCALE: NONE	X.X ±0.30
	X.XX ±0.10
	X° ±1°