



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Tx Filter 1732.5 MHz LTE Band 4 SMD 1.1x0.9 mm (BW=45 MHz)

TST Parts No.: TA1872B (This part is compliant by AEC-Q200)

Customer Part No.: _____

Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Hayley Chou *Hayley Chou*

Approved by: _____ Andy Yu *Andy Yu*

Date: _____ 2019/07/10

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1732.5 MHz

MODEL NO.: TA1872B

REV. No.: 2.0

A. MAXIMUM RATING:

1. Maximum Input Power: 10 dBm
2. DC voltage: +/-5 V
3. Operating Temperature: -40 °C to +85 °C
4. Storage Temperature: -40 °C to +85 °C
5. Moisture Sensitivity Level: Level 1 (MSL 1)
6. ESD: 50 V(MM), 100 V(HBM)

RoHS Compliant

Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Terminating source impedance: $Z_s = 50 \Omega$ (Single-ended)

Terminating load impedance: $Z_L = 50 \Omega$ (Single-ended)

Parameters Description	Unit	Min.	Typ.	Max.
Center Frequency Fc	MHz	-	1732.5	-
Insertion Loss (1710~1755 MHz) IL	dB(*1)	-	1.7	2.2
Amplitude Ripple (1710~1755 MHz)	dB _{p-p}	-	0.7	1.4
VSWR (1710~1755 MHz)	-	-	1.7	2.2
Attenuation (Reference level from 0 dB)				
50 ~ 1355 MHz	dB	30	35	-
1574 ~ 1577 MHz	dB	30	40	-
1600 ~ 1680 MHz	dB	18	26	-
1805 ~ 1880 MHz	dB	19	24	-
1930 ~ 1990 MHz	dB	25	35	-
2110 ~ 2170 MHz	dB	34	37	-
2200 ~ 2700 MHz	dB	20	33	-
2700 ~ 3800 MHz	dB	20	29	-
3800 ~ 6000 MHz	dB	10	21	-



(*1) Specification of insertion loss includes loss that comes from the test board.

C. FREQUENCY CHARACTERISTIC:


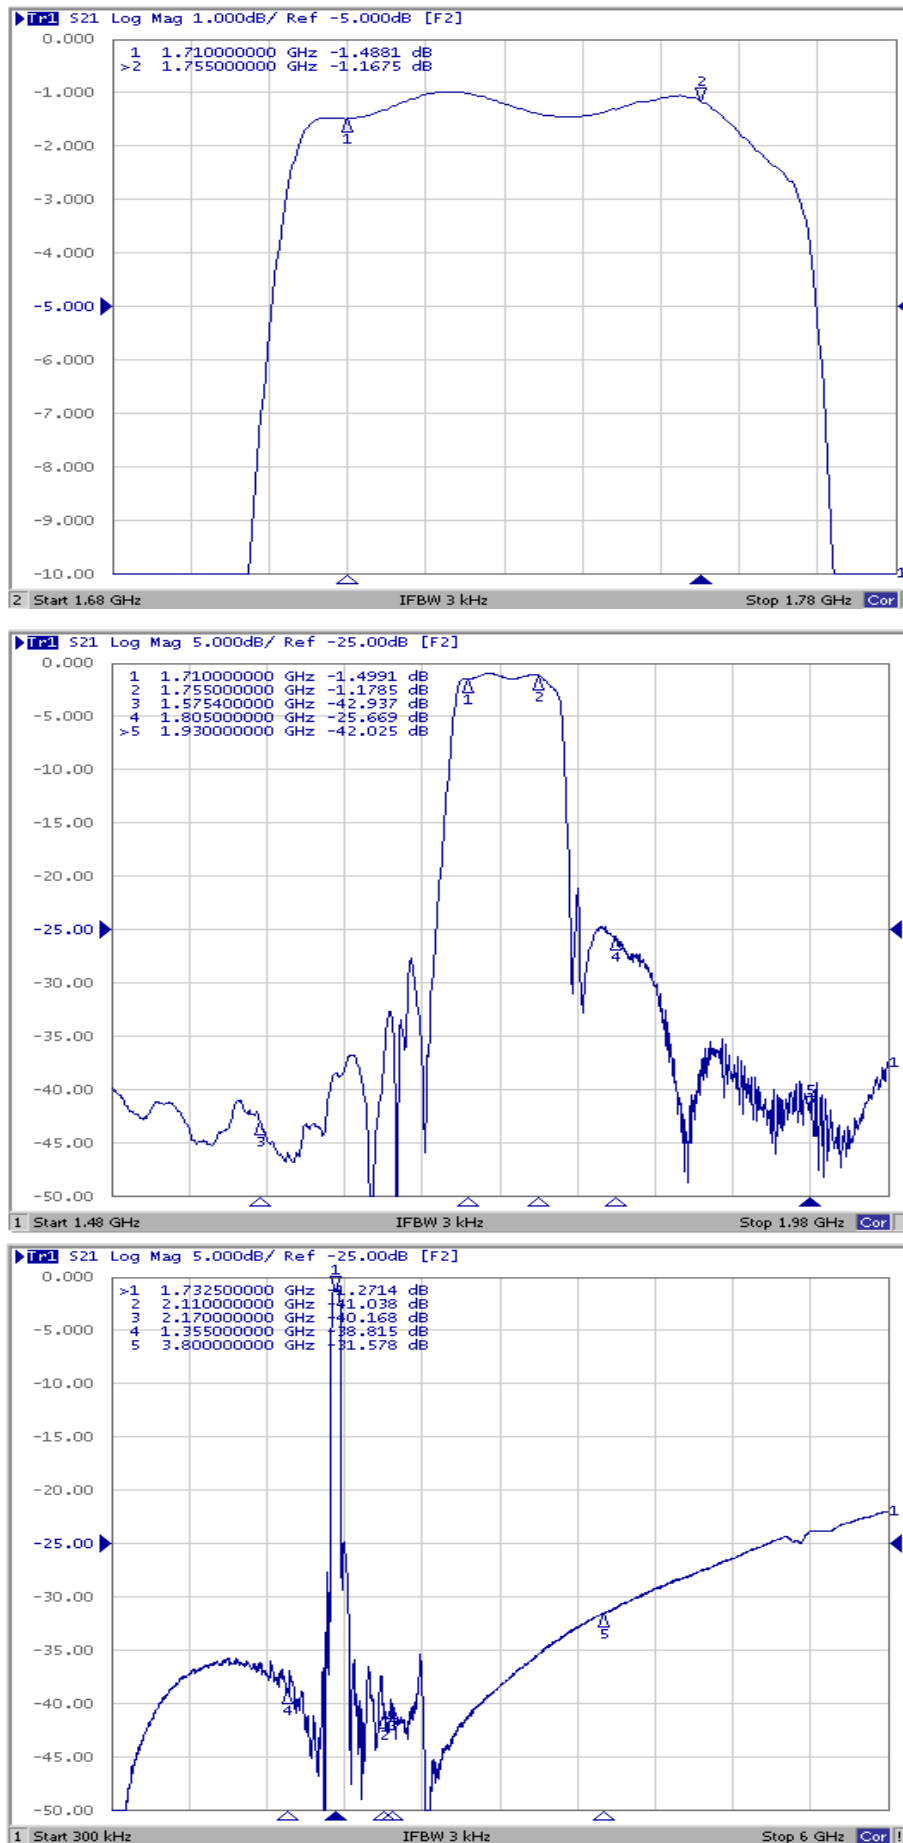


Reflection Functions:


VSWR

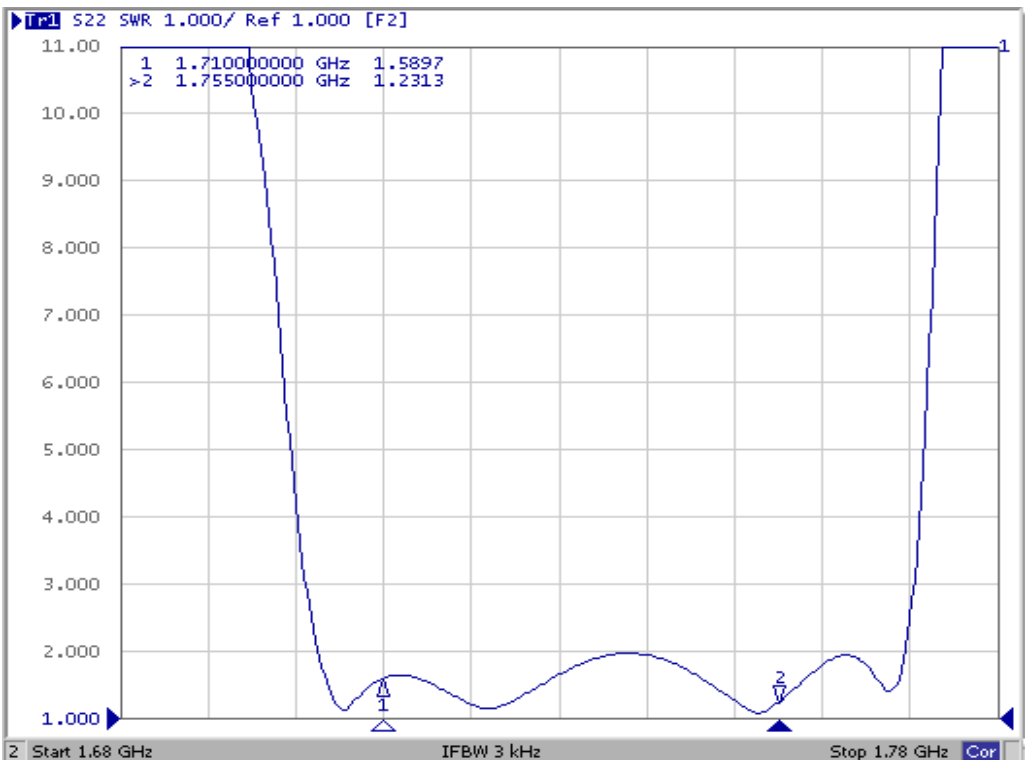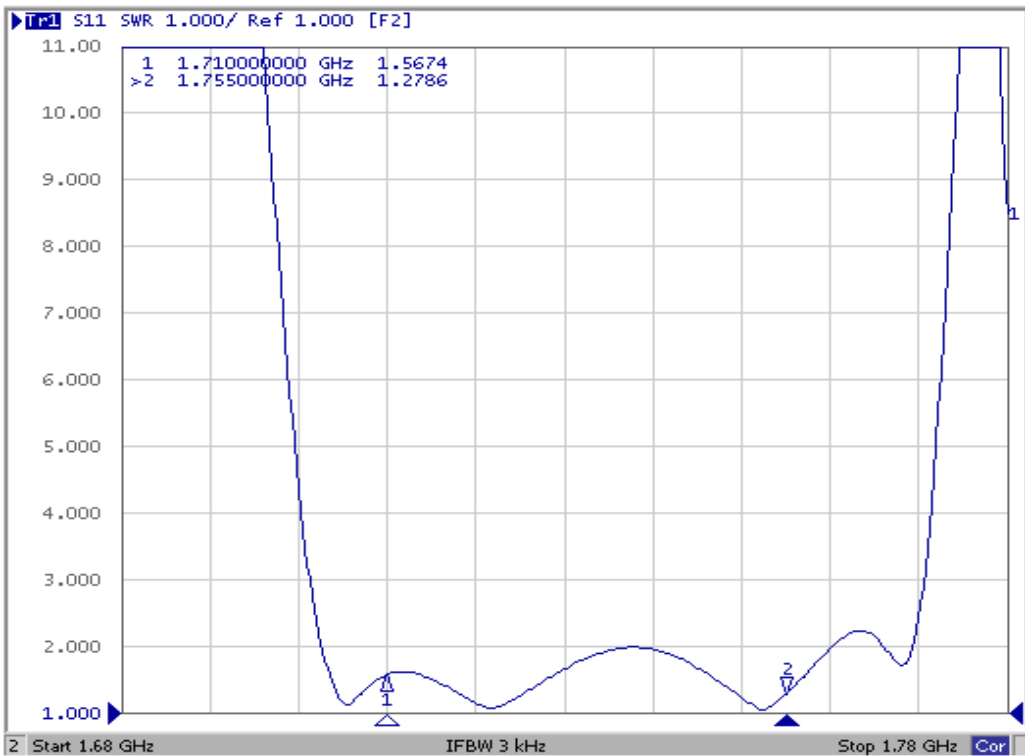


Smith Chart

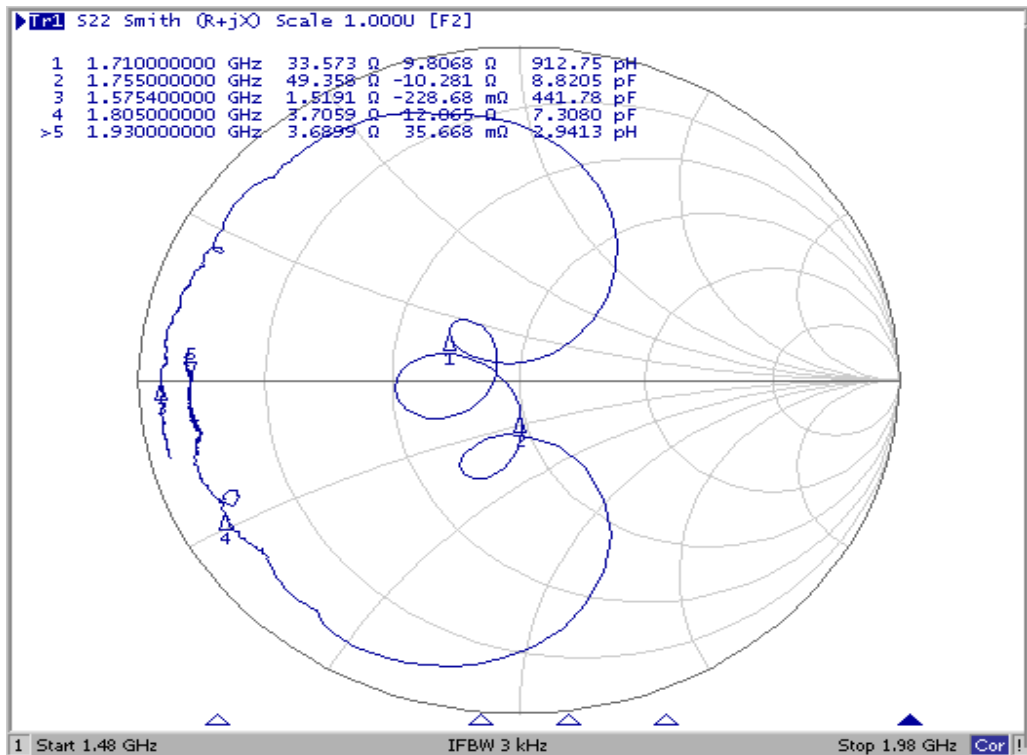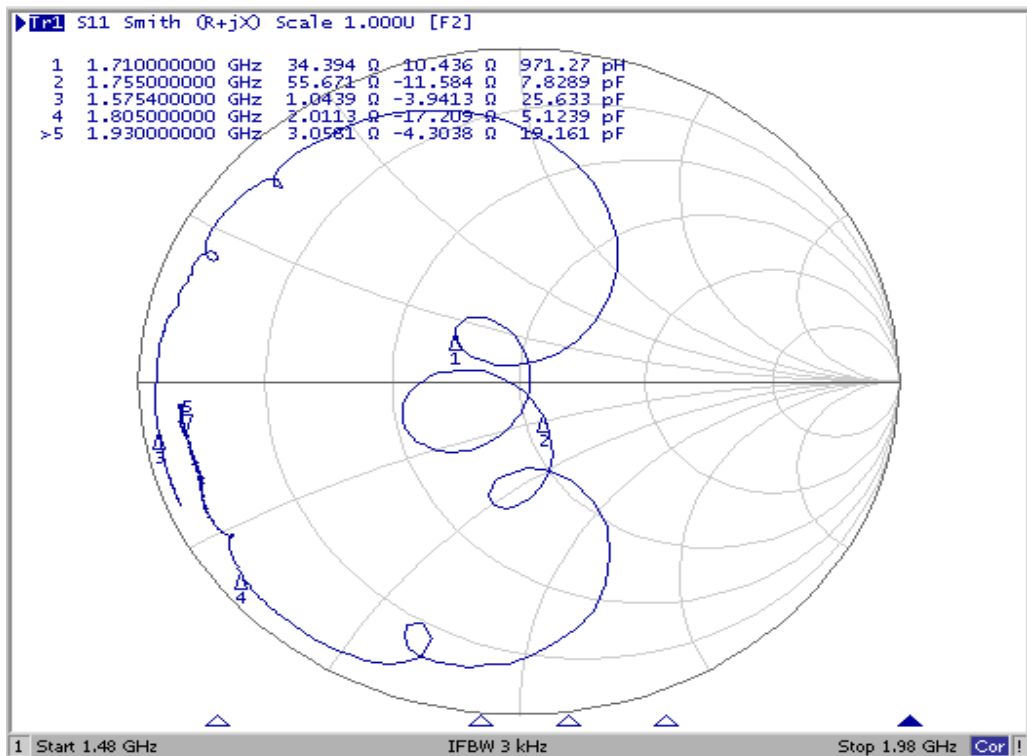

D. MEASUREMENT CIRCUIT:

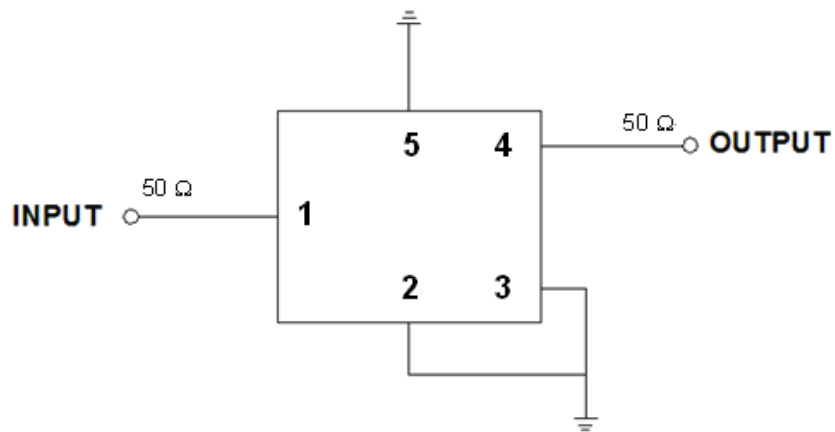


E. PCB Footprint:

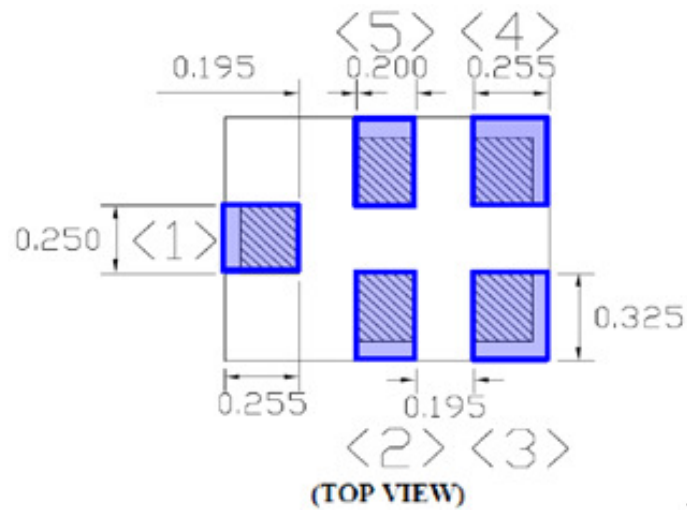

F OUTLINE DRAWING:

Device size: 1.1typ. x 0.9typ. x 0.5max.

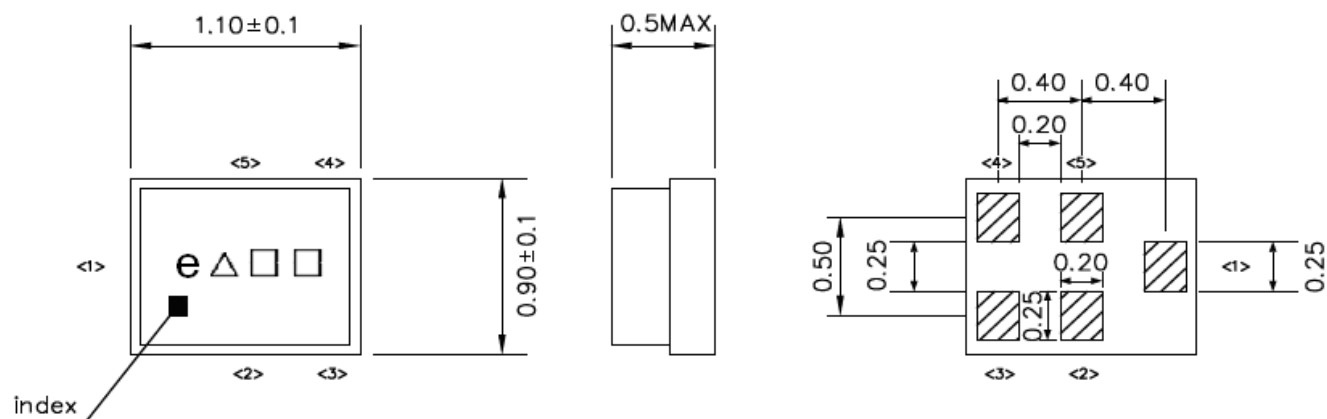

Unit : mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

△ : Date Code


□ : Lot No. (Indicated by 0~9 or A to Z and a to z, except I, O, i, o and l)

Date Code:

Year	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2017	A	B	C	D	E	F	G	H	J	K	L	M
2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019	a	b	c	d	e	f	g	h	j	k	l	m
2020	n	p	q	r	s	t	u	v	w	x	y	z

G. PACKING: (Ref: WI-75M03)

1. REEL DIMENSION

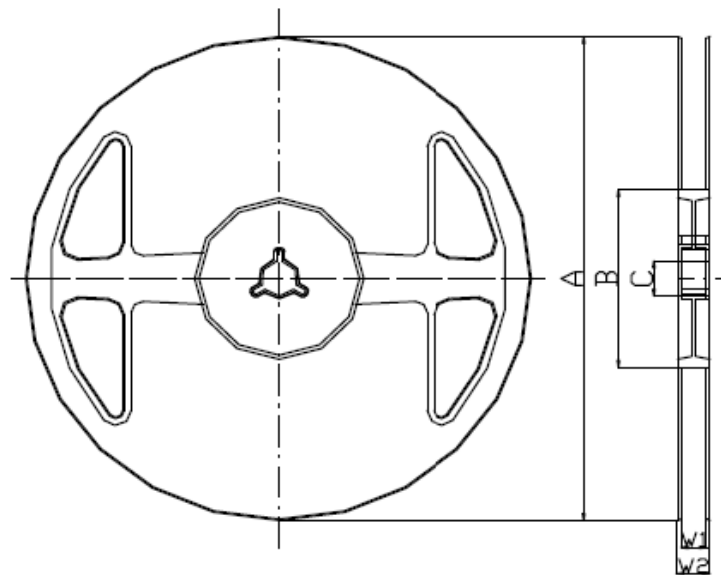

Materials of Reel

Material : Polystyrene + Carbon


Color : Black

Surface resistance (reference value) : $10^9 \Omega/\text{sq}$ Max.

Unit : mm

A	B	C	W1	W2
$\phi 180.0 +0.0/-1.5$	$\phi 66.0 +/-.0.5$	$\phi 13.0 +/-.0.2$	$9.0 +1.0/-0.0$	$11.4 +/-.1.0$

2. TAPE DIMENSION

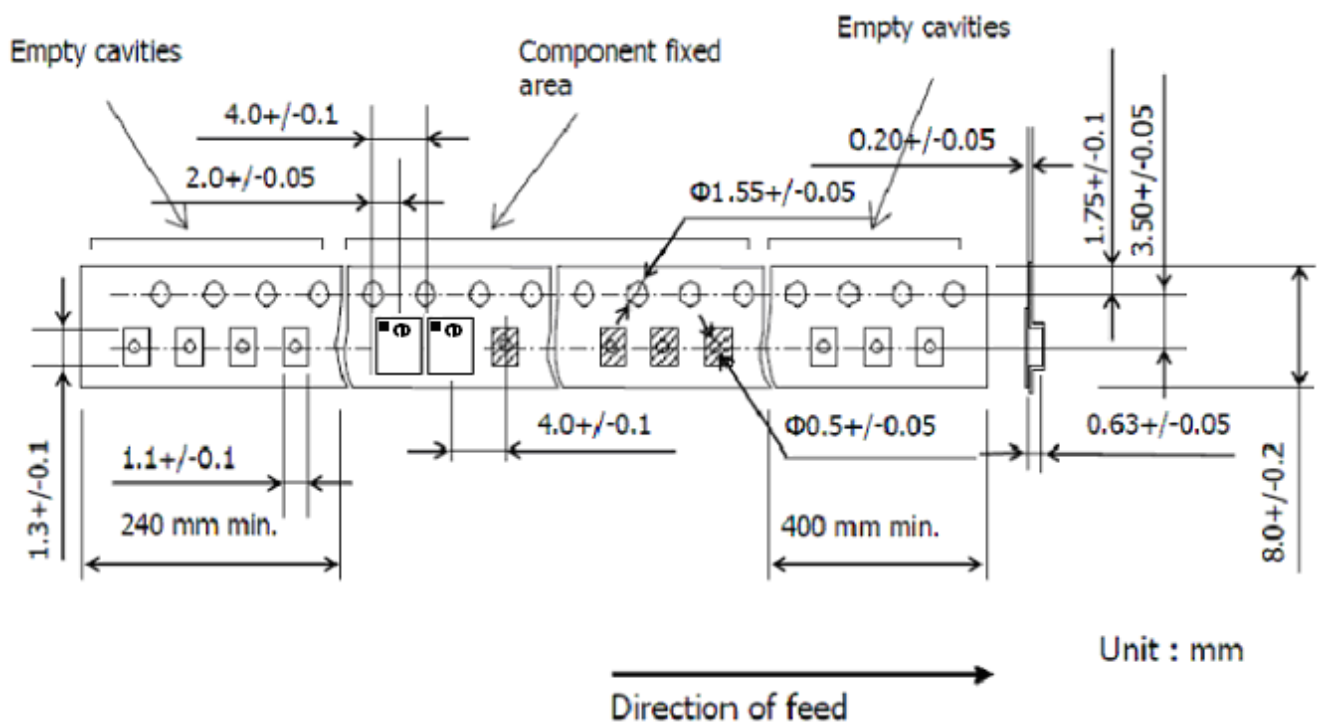

Unit : mm

H. Recommended Reflow Profile:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

