



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specification Approval Sheet

Product Name: SAW Filter 2250 MHz SMD 3.0X3.0 mm(BW=100MHz)

TST Parts No.: TA0700C

Customer Parts No.: \_\_\_\_\_

Customer signature required


Company: \_\_\_\_\_

Division: \_\_\_\_\_

Approved by : \_\_\_\_\_

Date: \_\_\_\_\_

Checked by: \_\_\_\_\_ Anne Chen 

Approved by: \_\_\_\_\_ Andy Yu 

Date: \_\_\_\_\_ 06/29/2018

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## SAW Filter 2250 MHz

MODEL NO.:TA0700C

REV. NO.:1

### A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitivity Level: Level 1 (MSL 1)

RoHS Compliant  
Lead free  
Lead-free soldering


Electrostatic Sensitive Device (ESD)

### B. ELECTRICAL CHARACTERISTICS:


| Item                                           | Unit | Min. | Type. | Max. | Note |
|------------------------------------------------|------|------|-------|------|------|
| Center Frequency <b>F<sub>c</sub></b>          | MHz  | -    | 2250  | -    | -    |
| Insertion Loss (2200 ~ 2300 MHz) <b>IL</b>     | dB   | -    | 3.2   | 4.5  | -    |
| Amplitude Ripple (2200 ~ 2300 MHz)             | dB   | -    | 1.9   | 3    | -    |
| VSWR (2200 ~ 2300 MHz)                         |      | -    | 1.9   | 2.5  | -    |
| <b>Attenuation</b> (Reference level from 0 dB) |      |      |       |      |      |
| D.C. ~ 2160 MHz                                | dB   | 25   | 28    | -    | -    |
| 2340 ~ 4000 MHz                                | dB   | 25   | 32.5  | -    | -    |

### C. MEASUREMENT CIRCUIT:

HP Network analyzer

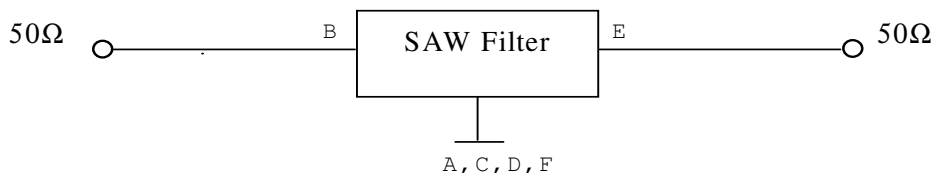

## D.OUTLINE DRAWING:

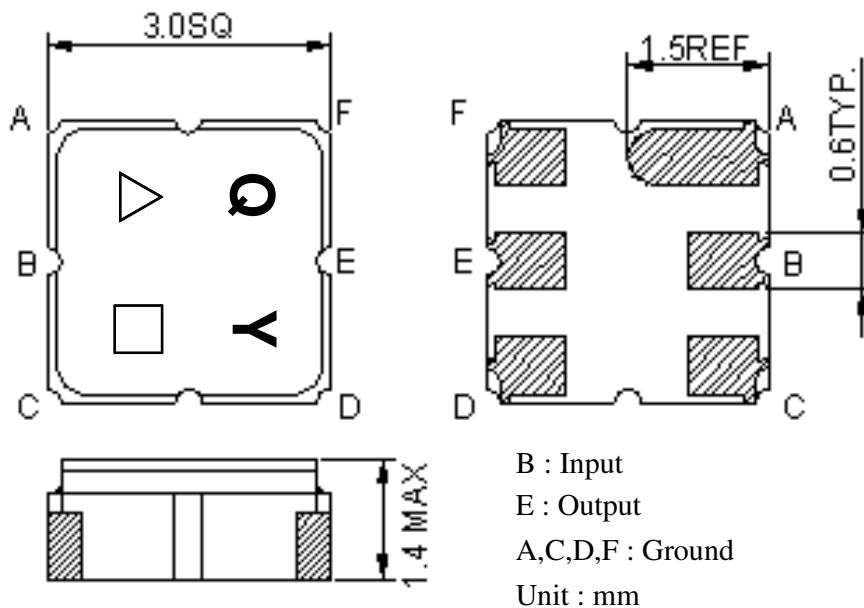


△ : Year Code (2010->0, ..., 2019->9)

□ : Date Code (W01->A,...W26->Z,W27->a,...,W52->z)



Date Code Table

|      |      |      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|------|------|
| WK01 | WK02 | WK03 | WK04 | WK05 | WK06 | WK07 | WK08 | WK09 | WK10 | WK11 | WK12 | WK13 |
| A    | B    | C    | D    | E    | F    | G    | H    | I    | J    | K    | L    | M    |
| WK14 | WK15 | WK16 | WK17 | WK18 | WK19 | WK20 | WK21 | WK22 | WK23 | WK24 | WK25 | WK26 |
| N    | O    | P    | Q    | R    | S    | T    | U    | V    | W    | X    | Y    | Z    |
| WK27 | WK28 | WK29 | WK30 | WK31 | WK32 | WK33 | WK34 | WK35 | WK36 | WK37 | WK38 | WK39 |
| a    | b    | c    | d    | e    | f    | g    | h    | i    | j    | k    | l    | m    |
| WK40 | WK41 | WK42 | WK43 | WK44 | WK45 | WK46 | WK47 | WK48 | WK49 | WK50 | WK51 | WK52 |
| n    | o    | p    | q    | r    | s    | t    | u    | v    | w    | x    | y    | z    |

## E. PCB Footprint:


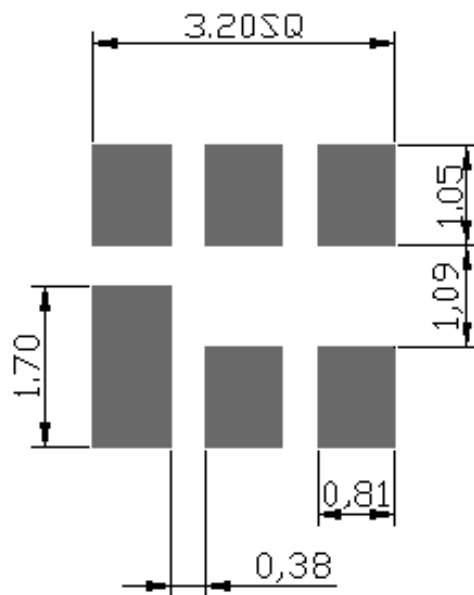


## F. Frequency Characteristics :

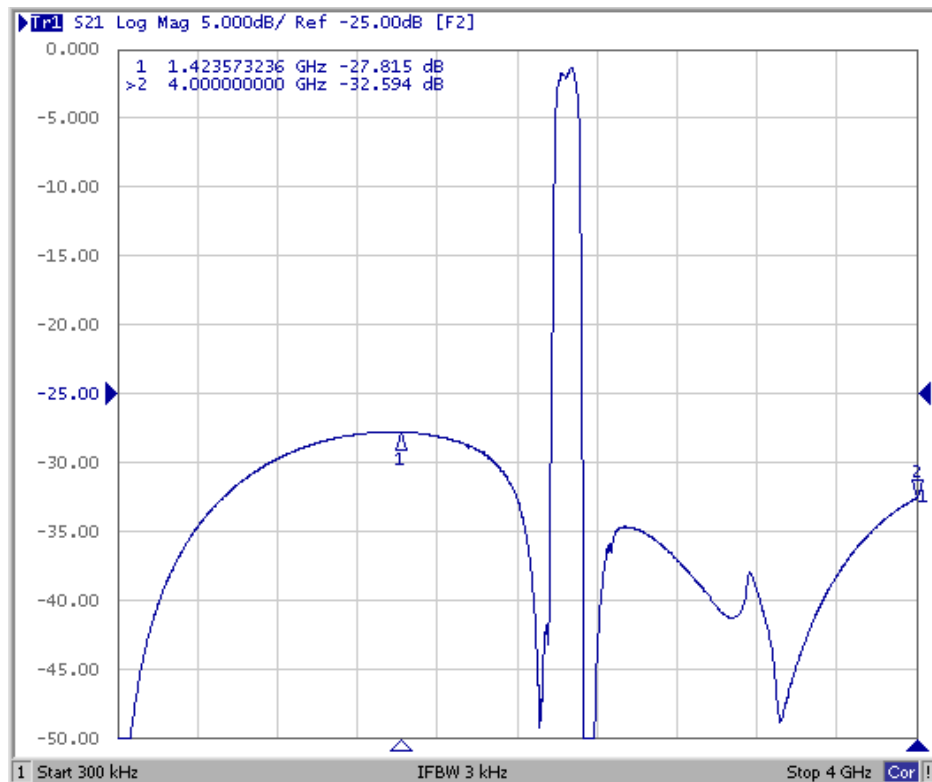
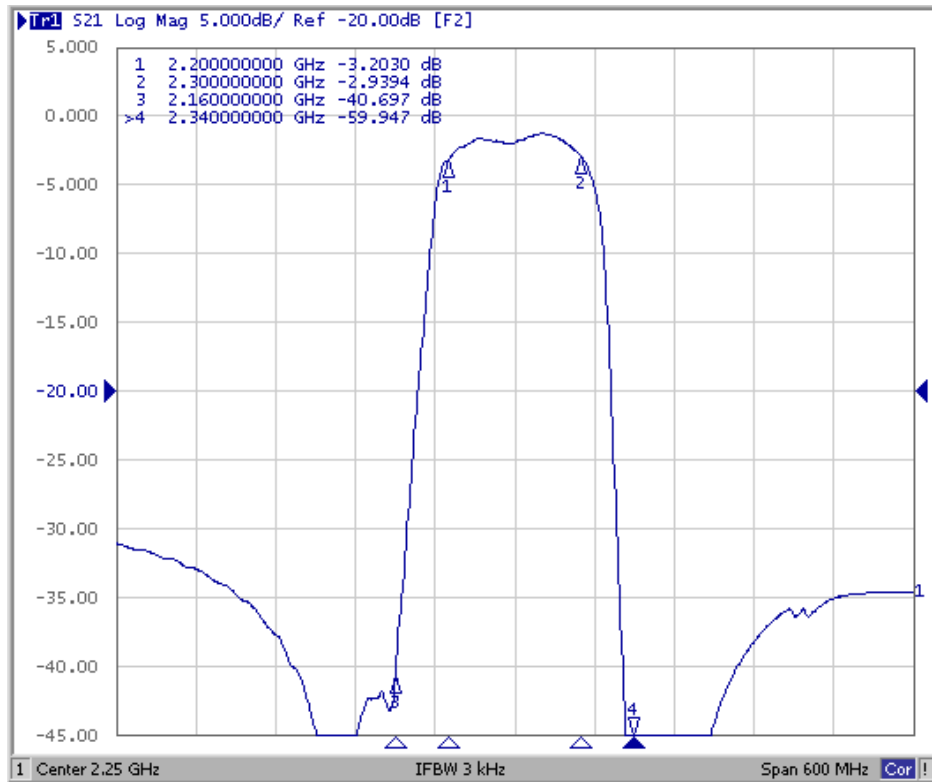


## Reflection Functions :

S11

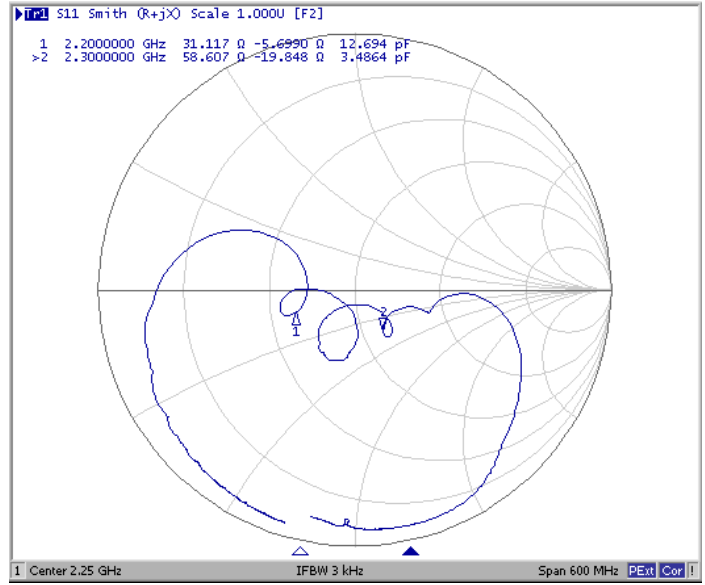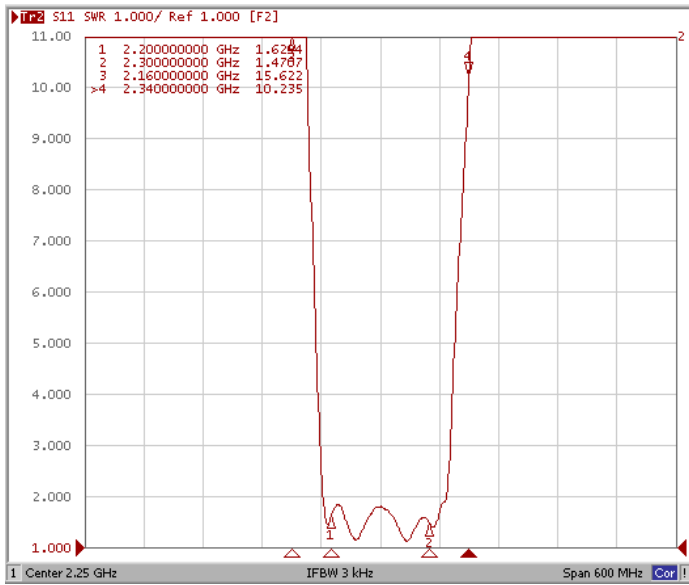


S22

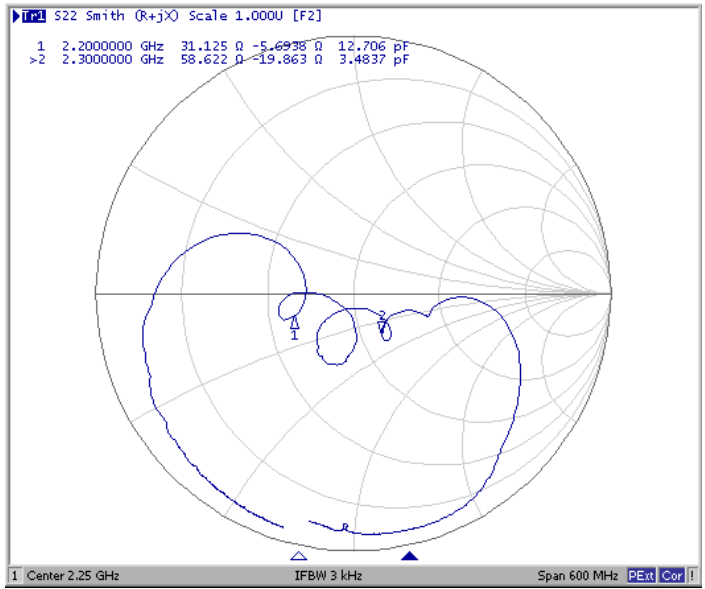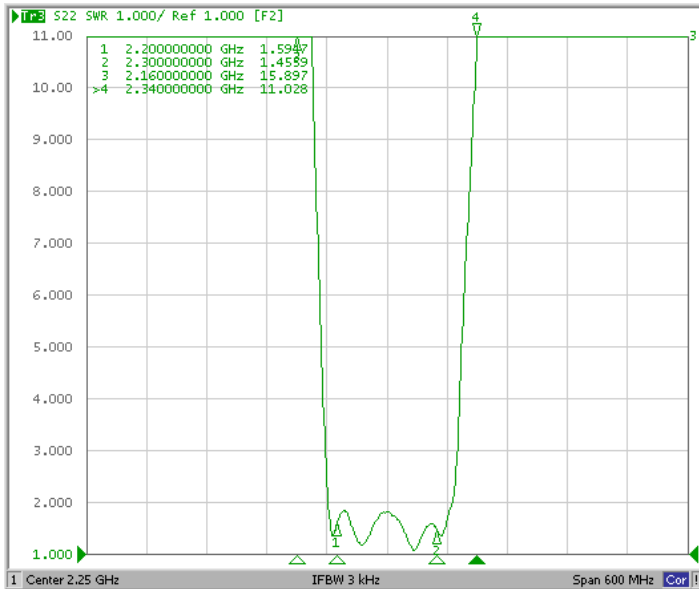


## G. PACKING:

### 1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

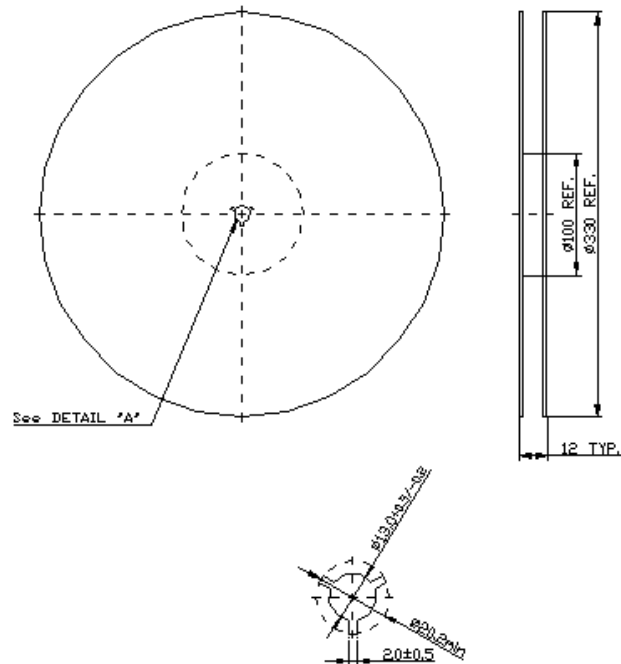

### 2.TAPE DIMENSION

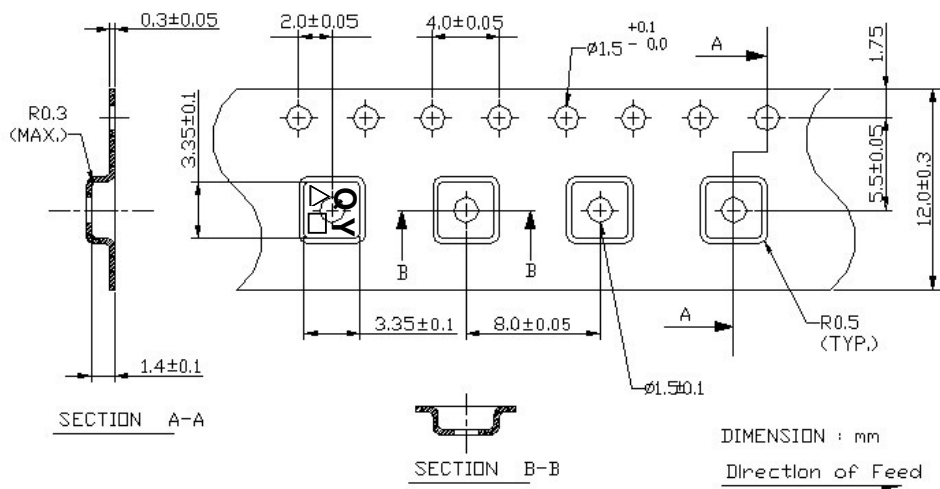

## H . RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

