

**ES1A THRU ES1J****DIODE****1.0AMP SURFACE MOUNT
GLASS SUPERFAST
RECOVERY RECTIFIER****DESCRIPTION**

The UTC **ES1A thru ES1J** is a surface mount glass superfast recovery rectifier, it uses UTC's advanced technology to provide customers with low power loss and high efficiency, etc.


FEATURES

- *Glass passivated Junction chip
- *Low reverse leakage
- *High forward surge current capability


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
ES1AL-SMA-R	ES1AG-SMA-R	SMA	K	A	Tape Reel
ES1AL-CA2-R	ES1AG-CA2-R	SOD-123	A	K	Tape Reel
ES1BL-SMA-R	ES1BG-SMA-R	SMA	K	A	Tape Reel
ES1BL-CA2-R	ES1BG-CA2-R	SOD-123	A	K	Tape Reel
ES1CL-SMA-R	ES1CG-SMA-R	SMA	K	A	Tape Reel
ES1CL-CA2-R	ES1CG-CA2-R	SOD-123	A	K	Tape Reel
ES1DL-SMA-R	ES1DG-SMA-R	SMA	K	A	Tape Reel
ES1DL-CA2-R	ES1DG-CA2-R	SOD-123	A	K	Tape Reel
ES1EL-SMA-R	ES1EG-SMA-R	SMA	K	A	Tape Reel
ES1EL-CA2-R	ES1EG-CA2-R	SOD-123	A	K	Tape Reel
ES1GL-SMA-R	ES1GP-SMA-R	SMA	K	A	Tape Reel
ES1GL-CA2-R	ES1GP-CA2-R	SOD-123	A	K	Tape Reel
ES1JL-SMA-R	ES1JG-SMA-R	SMA	K	A	Tape Reel
ES1JL-CA2-R	ES1JG-CA2-R	SOD-123	A	K	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

 ES1AG-SMA-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) SMA: SMA, CA2: SOD-123 (3) L: Lead Free, G: Halogen Free and Lead Free P: Halogen Free and Lead Free For ES1G only
---	--

MARKING

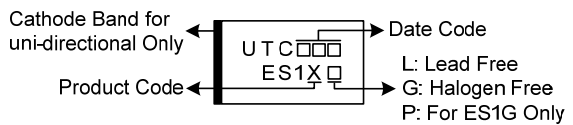SMA	SOD-123
 Cathode Band for uni-directional Only Product Code UTC ES1X Date Code L: Lead Free G: Halogen Free P: For ES1G Only	 Product Code EX L: Lead Free G: Halogen Free P: For ES1G Only

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise specified)

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOL	RATINGS							UNIT
		ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	
Peak Repetitive Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V
DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	V
Average Rectified Output Current T _A =75°C	I _O	1.0							A
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	30							A
Operating Junction Temperature Range	T _J	-55 ~ +150							°C
Storage Temperature Range	T _{STG}	-55 ~ +150							°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SMA	θ _{JA}	80	°C/W
	SOD-123		160	°C/W

Note: P.C.B. mounted with 8.0mm² (.013mm thick) copper pad areas.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise specified)

Ratings at 25°C ambient temperature unless otherwise specified.





Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOL	TEST CONDITIONS	RATINGS							UNIT
			ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	
Forward Voltage	V _{FM}	I _F =1.0A	0.95	0.95	0.95	0.95	1.25	1.25	1.7	V
Peak Reverse Current at Rated DC Blocking Voltage	I _R	T _A =25°C	5.0							μA
		T _A =125°C	500							μA
Reverse Recovery Time (Note 1)	t _{rr}		35							ns
Junction Capacitance (Note 2)	C _J		18							pF

Notes: 1. Reverse recovery condition I_F=0.5A, I_R=1.0A, I_{rr}=0.25A.

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

■ TYPICAL CHARACTERISTICS

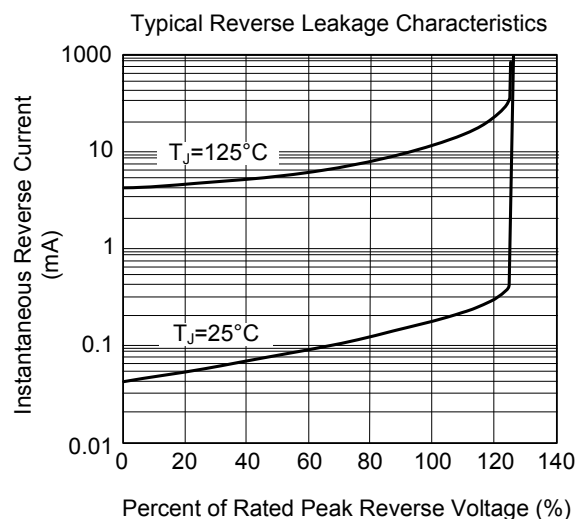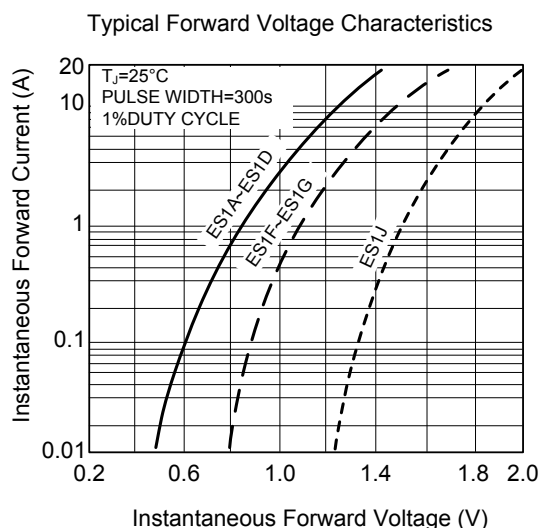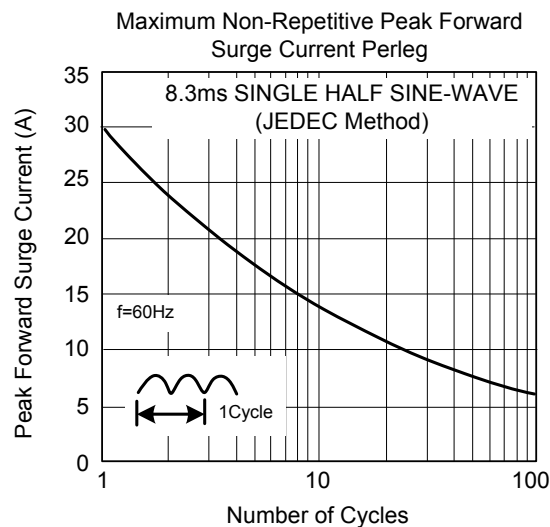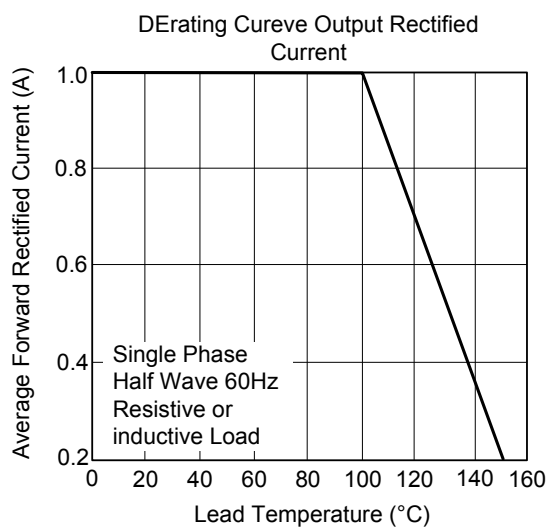

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.