

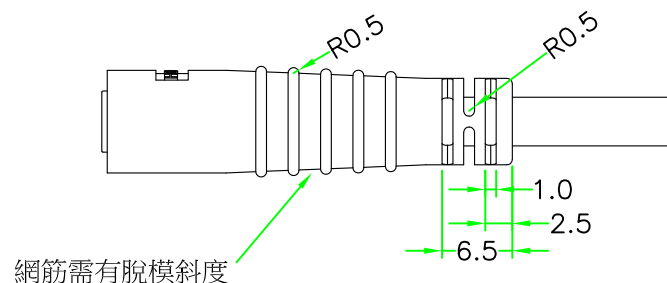

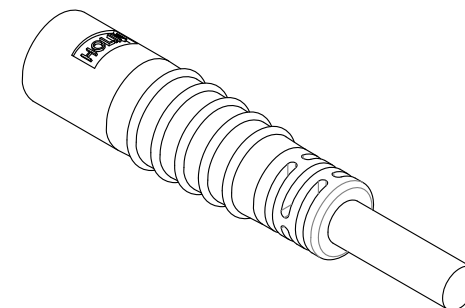
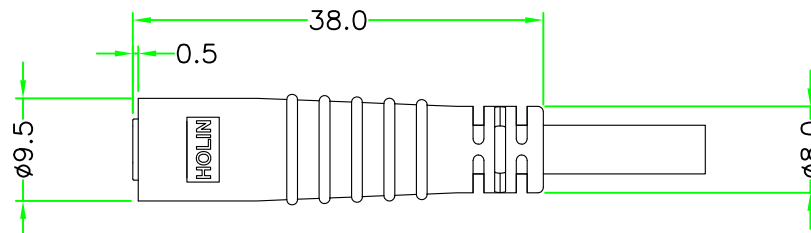


RoHS
IP66

REV	DESCRIPTION	DATE
A	ISSUE	Aug/08/2017

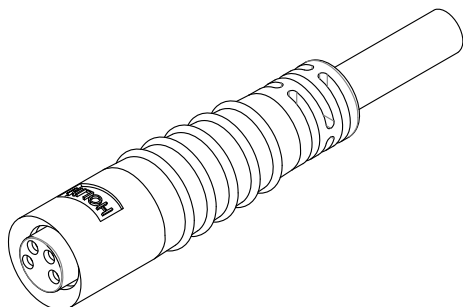

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 3A / 1A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:


500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-N2xxSM

02 - 2 PIN 03 - 3 PIN
04 - 4 PIN 06 - 6 PIN

D - CURRENT RATING 3A
I - CURRENT RATING 1A

*Cable specification and length can be customized.

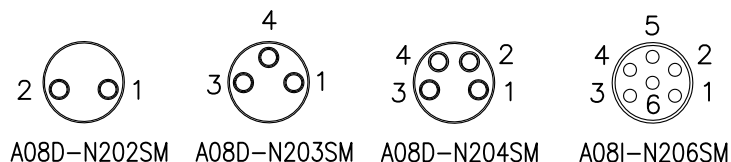

PIN ASSIGNMENT FRONT VIEW
(前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : M8 A Coding Female Molded Cable Ass'y	
SCALE	1.5:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		P/N: A08x-N2xxSM	DR. SIBYL
REV. A	SHEET 1/1	DWG.NO: A08x-N2xxSM	CH. ERIC

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Female Contact.		N	
1	CONNECTOR	M08 A Coding Female Connector Insert. NYLON+GF.	BLACK	1	(249-135)