
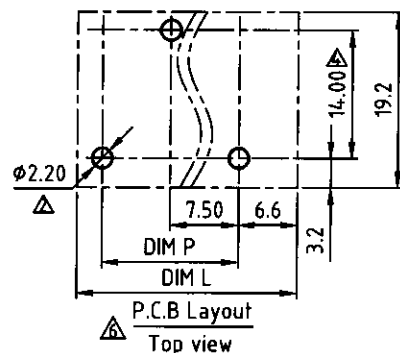

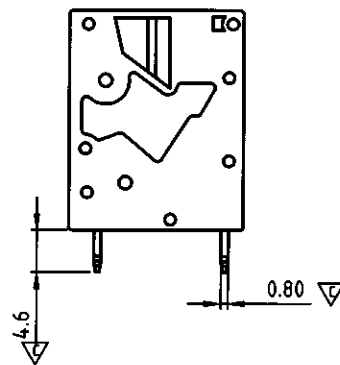
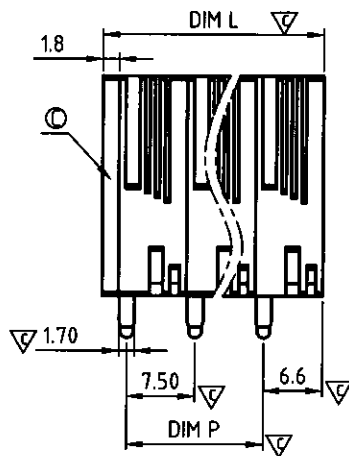
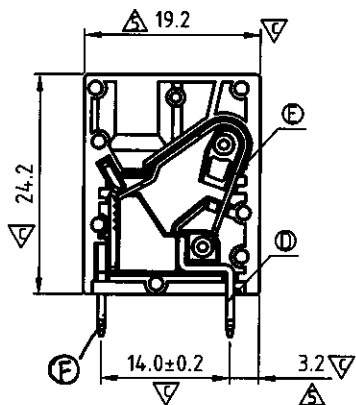


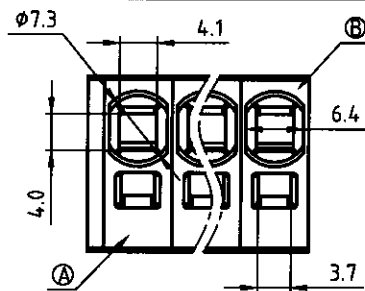

N=NUMBER OF POLES

DIM	TOL			
	1P--5P	7P--11P	13P--15P	
Dim P	(N-1)×7.5	±0.15	±0.25	±0.35
Dim L	N×7.5+1.8	±0.15	±0.25	±0.35

SIGN	DATE	DESCRIPTION	APPROVER
△	09/15'11	The color is changed from RAL7035/D to RAL7004/P	Runner
△	09/15'11	The dimension is changed from 2.1 to 2.2	Runner
△	09/15'11	The Material is changed	Runner
△	09/15'11	The tolerance is changed	Runner
△	09/25'13	change the dimension from 18.6&2.6 to 19.2&3.2	Da cheng
△	09/25'13	change the electrical specification	Da cheng
△	12/28'13	update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!

Material:

- Item A Terminal body: Thermoplastic (UL94V-0)
- Item B Terminal side body: Thermoplastic (UL94V-0)
- Item C Terminal cover: Thermoplastic (UL94V-0)
- Item D Contact pin: Copper, Tin Plated.
- Item E Spring clamp: Stainless steel
- Item F Contact pin: Copper, Tin Plated.

- △ Electrical: cULus
- Voltage rating: 300 V
- Current rating(Sol): 30 A
- Current rating(Str): 35 A
- Solid wire(AWG): 10-24
- Stranded wire(AWG): 8-24
- Wire strip length: 15-16 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +120°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: △

NK xx A 0 x 1 xxxx G

RoHS compliant
(lead<4%)

In copper Alloy

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.

- △ No. OF POLES
- 01: 1POLES
- 03: 3 POLES
- 15: 15 POLES

- △ Body Color
- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- △ 8 Grey(RAL7004/P)
- 9 White(RAL1102)
- C Multiple colors



ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR, PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NK 7.5mm Series Vertical (Single tail B type)(第1P在左侧) 单脚P			
PART NO.	NKxxA0x1xxxxG		DWG NO.	8NK0002
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Da cheng 2013.12.28	Da cheng 2013.12.28	
SHEET: 01/01				REV: D
				Tolerance
				X. ±0.50
				X.X ±0.30
				X.XX ±0.10
				X* ±1°