

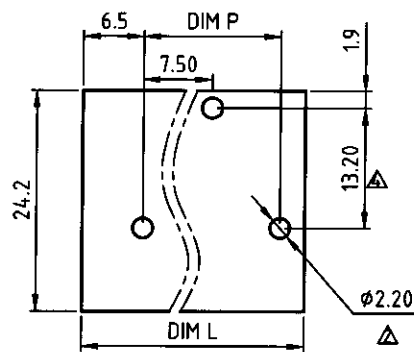





P.C.B Layout
Top view

N=NUMBER OF POLES

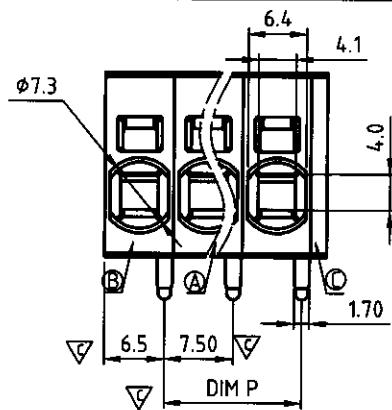

DIM		TOL		
		1P--5P	7P--11P	13P--15P
Dim P	(N-1)×7.5	±0.15	±0.25	±0.35
Dim L	N×7.5+1.8	±0.15	±0.25	±0.35

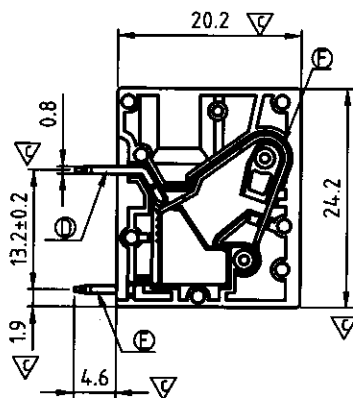

- NK xx A 1 x 1 xxxx G**
- △△ No. OF POLES
 - 01: 1POLES
 - 03: 3 POLES
 - 15: 15 POLES
 - △ Body Color
 - 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7004/P)
 - 9 White(RAL1102)
 - C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark

Any special item by
customer request,
please contact sales
department.



SIGN	DATE	DESCRIPTION	APPROVER
△	09/15'11	The color is changed from RAL7035/D to RAL7004/P	Runner
△	09/15'11	The dimension is changed from 2.1 to 2.2	Runner
△	09/15'11	The Material is changed	Runner
△	09/15'11	The tolerance is changed	Runner
△	09/25'13	change the dimension from 18.6&2.6 to 19.2&3.2	Da cheng
△	09/25'13	change the electrical specification	Da cheng
△	12/28'13	update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY

Material:

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal side body: Thermoplastic (UL94V-0)
- Item ③ Terminal cover: Thermoplastic (UL94V-0)
- △ Item ④ Contact pin : Copper, Tin Plated.
- Item ⑤ Contact pin : Copper, Tin Plated.
- Item ⑥ Spring clamp : Stainless steel
- △ Electrical: cULus
 - Voltage rating: 300 V
 - Current rating(Sol): 30 A
 - Current rating(Str): 35 A
 - Solid wire(AWG): 10-24
 - Stranded wire(AWG): 8-24
 - Wire strip length: 15-16 mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +120°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval: cULus
 - Critical dimension: △

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD.

TITLE		NK 7.5mm Series Right angle (Single tail B type)(第1P为端子侧) 单脚P								
PART NO.		NKxxA1x1xxxxG			DWG NO.		8NK0004			
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance			
		Da cheng 2013.12.28	Da cheng 2013.12.28			UNIT: mm			X. ±0.50	
						SCALE: NONE			X.X ±0.30	
						SHEET: 01/01			REV: D	X.XX ±0.10
										X* ±1°