


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/06/16'	HZW 06/06/16'	LJC 06/06/16'
B	DRAWING UPDATE	JLZ 05/31/18'		

SPECIFICATION


1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Product Number Code:

DS1130-02-X X X X X

- Housing Materials
P:PBT
- Contact Plating
8:Full Gold Flash
- Housing Color
B:Black
- No.Of Contacts
8:8p8c
- Connector Type
S:Socket

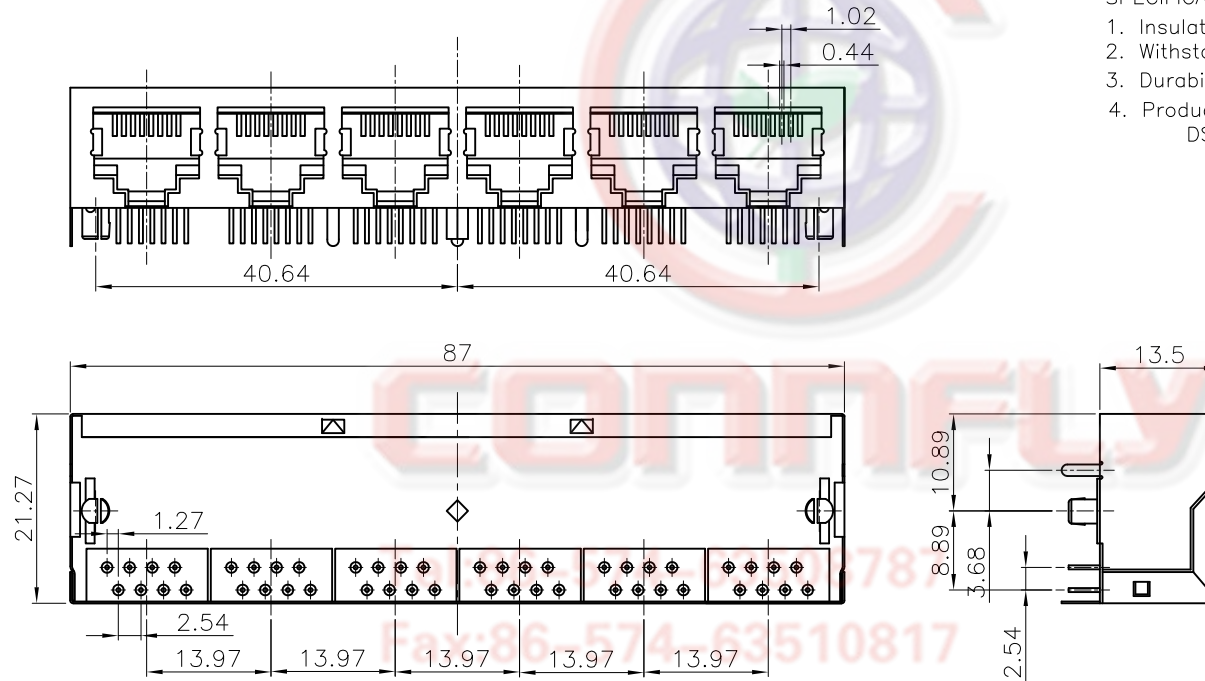

8: 8p8c
Bottom View

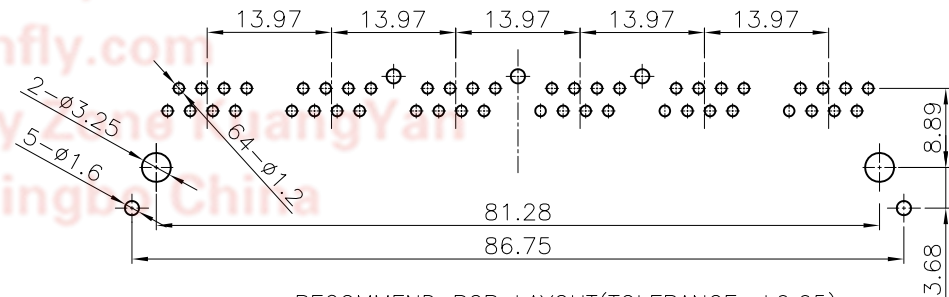

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	PCB Jack 8 Positions 1*6 Port W/ Shell 3.68mm Type	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES	DS1130-02 SERIES	
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1130-02-XXXX-B						



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD