

SIGN	DATE	DESCRIPTION	APPROVER
△	01/20'07	The Soldering temperature from 245° to 250°	Aaron
△	2010.08.12	The design is changed	Chen Bo
△	11/13'12	update the drawing	Da cheng
△	10/13'14	update the drawing	Airy min

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

△ Material:

- Item ① Lever: Thermoplastic (UL94V-0) Orange (RAL2011/P)
- Item ② Terminal body: Thermoplastic (UL94V-0)
- Item ③ cover: Thermoplastic (UL94V-0)
- Item ④ Spring clamp: Stainless steel
- Item ⑤ contact pin: Brass.Tin plated

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 10A/10A
- Wire range: 0.75-1.5mm²
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus VDE
- Critical dimension: △



△ HA xx 30 x 0 xxxx G

No. OF POLES





- 01 1 POLE
- 02 2 POLES
- 03 3 POLES
- ...
- 24 24 POLES

BODY COLOR

- 2 Red(RAL3001/D)
- 5 Green(RAL6018/T)
- 8 Grey(RAL7004/P)
- C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy


0000: "®" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

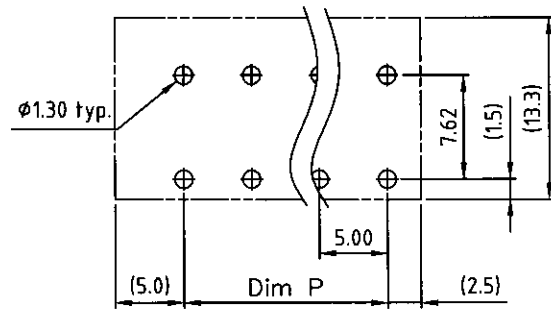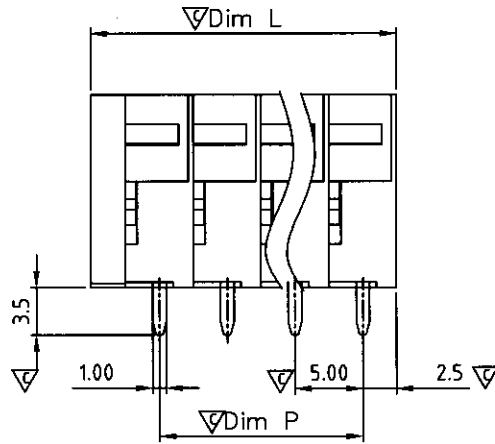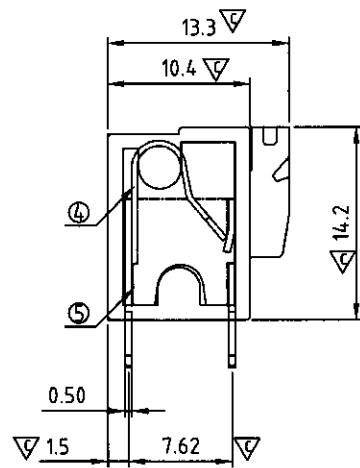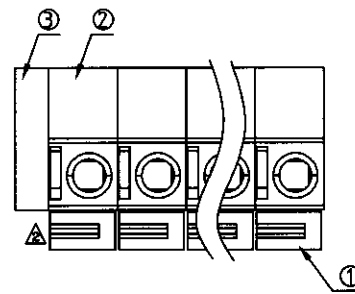

△ P.C.B. LAYOUT
Bottom view

△ N = Number of poles
Dim L = N x 5.0 + 2.54
Dim P = (N - 1) x 5.0

POLES	Dim L	Dim P
1p	±0.10	
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

ANYTEK				CUSTOMER COPY					
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD					
TITLE		HA-5.0mm 90°							
PART NO.		HAxx30x0xxxxG		DWG NO.		8HA0007			
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance		
		Airy min 2014.10.13				UNIT: mm		X.	±0.50
						SCALE: NONE		X.X	±0.30
						REV.: G		X.XX	±0.10
						SHEET: 01/01		X°	±1°