



UT9435HZ

Power MOSFET



P-CHANNEL ENHANCEMENT MODE

DESCRIPTION

The UTC **UT9435HZ** is a P-channel enhancement power MOSFET. It has low gate charge, fast switching speed and perfect $R_{DS(ON)}$.

This device is generally applied in power management applications.

SYMBOL

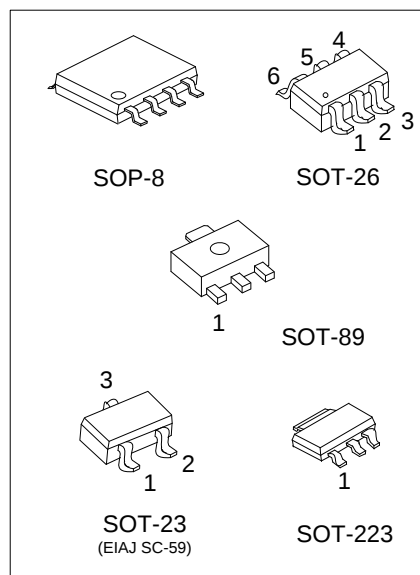






ORDERING INFORMATION

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
UT9435HZL-AA3-R	UT9435HZG-AA3-R	SOT-223	G	D	S	-	-	-	-	-	Tape Reel
UT9435HZL-AB3-R	UT9435HZG-AB3-R	SOT-89	G	D	S	-	-	-	-	-	Tape Reel
UT9435HZL-AE3-R	UT9435HZG-AE3-R	SOT-23	G	S	D	-	-	-	-	-	Tape Reel
UT9435HZL-AG6-R	UT9435HZG-AG6-R	SOT-26	D	D	G	S	D	D	-	-	Tape Reel
UT9435HZL-S08-R	UT9435HZG-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: S: Source G: Gate D: Drain

UT9435HZG-AE3-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) AA3: SOT-223, AB3: SOT-89, AE3: SOT-23, AG6: SOT-26, S08: SOP-8 (3) G: Halogen Free and Lead Free, L: Lead Free
---	---

MARKING

PACKAGE	MARKING
SOT-223	 L: Lead Free G: Halogen Free Date Code
SOT-89	 Date Code L: Lead Free G: Halogen Free
SOT-23	 L: Lead Free G: Halogen Free
SOT-26	 L: Lead Free G: Halogen Free
SOP-8	 Date Code L: Lead Free G: Halogen Free Lot Code

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain to Source Voltage	V _{DSS}	-30	V
Gate to Source Voltage	V _{GSS}	±20	V
Continuous Drain Current (Note 3)	I _D	-5.3	A
Pulsed Drain Current (Note 1, 2)	I _{DM}	-20	A
Power Dissipation	SOT-89	1.31	W
	SOT-23/SOT-26	1.25	W
	SOT-223	1.78	W
	SOP-8	1.38	W
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-89	95	°C/W
	SOT-23/SOT-26	100	°C/W
	SOT-223	70	°C/W
	SOP-8	90	°C/W

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)





PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D = -250μA	-30			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} = -30V, V _{GS} =0V			-1	μA
Gate-Source Leakage Current	I _{GSS}	V _{DS} =0V , V _{GS} =±20V			±5	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D = -250μA	-1		-3	V
Drain-Source On-State Resistance (Note 2)	R _{DS(ON)}	V _{GS} = -10V, I _D = -5.3A		44	55	mΩ
		V _{GS} = -4.5V, I _D = -4.2A		74	135	mΩ
On State Drain Current	I _{D(ON)}	V _{DS} = -5V, V _{GS} = -10V	-20			V
DYNAMIC PARAMETERS						
Input Capacitance	C _{ISS}	V _{DS} = -15V, V _{GS} =0V, f=1.0MHz		600		pF
Output Capacitance	C _{OSS}			95		pF
Reverse Transfer Capacitance	C _{RSS}			85		pF
SWITCHING PARAMETERS						
Total Gate Charge (Note 2)	Q _G	V _{DS} = -15V, V _{GS} = -10V, I _D = -5.3A		50	55	nC
Gate-Source Charge	Q _{GS}			5		nC
Gate-Drain Charge	Q _{GD}			5		nC
Turn-ON Delay Time (Note 2)	t _{D(ON)}	V _{DD} = -15V, I _D = -1A, V _{GEN} = -10V, R _G =6Ω,		33	40	ns
Turn-ON Rise Time	t _R			31	45	ns
Turn-OFF Delay Time	t _{D(OFF)}			122	130	ns
Turn-OFF Fall Time	t _F			70	90	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source Diode Forward Voltage (Note 2)	V _{SD}	V _{GS} =0V, I _S = -5.3A		-0.84	-1.3	V

Notes: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. Pulse width ≤ 300μs, duty cycle ≤ 2%.

3. Device mounted on FR-4 substrate PC board, 2oz copper, with 1in² square copper plate.

■ TYPICAL CHARACTERISTICS

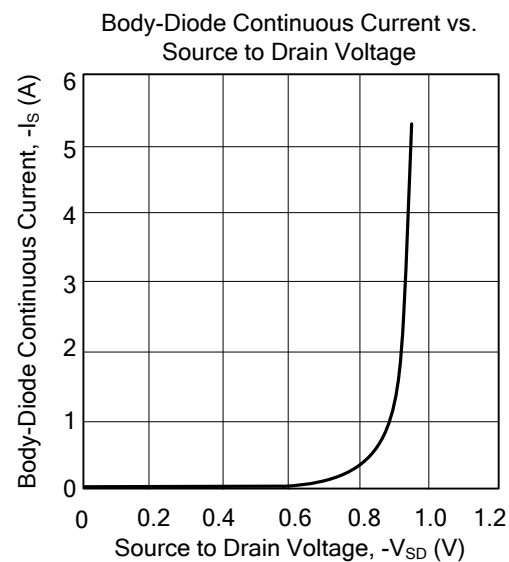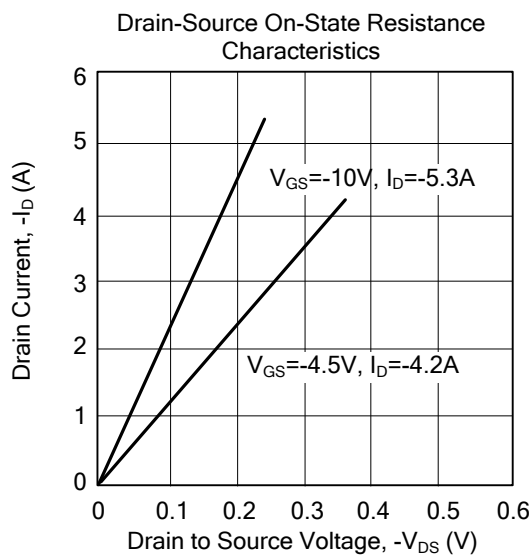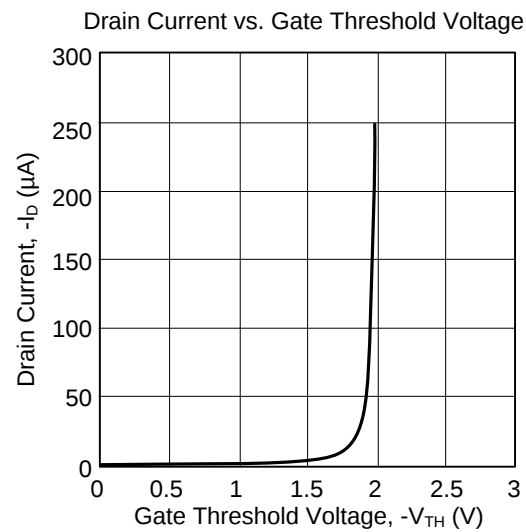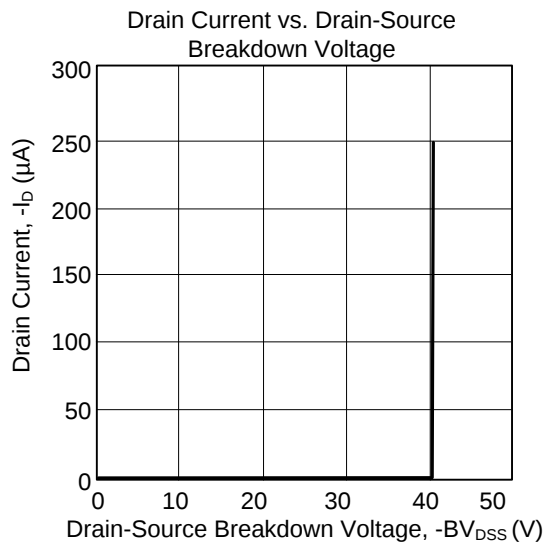

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.