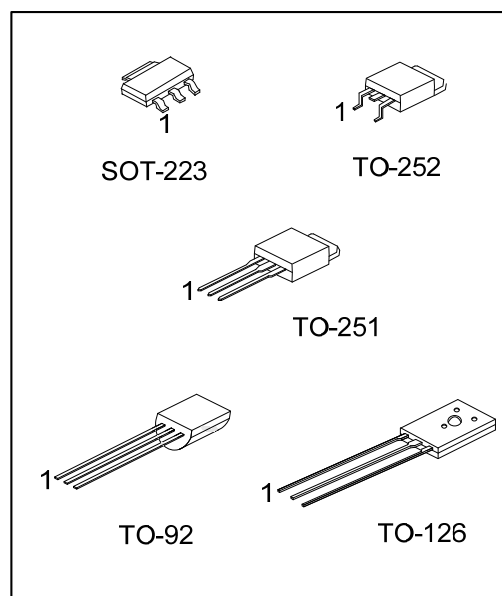



**5302D****NPN SILICON TRANSISTOR****HIGH VOLTAGE NPN
TRANSISTOR WITH DIODE****DESCRIPTION**

The UTC 5302D are series of NPN silicon planar transistor with diode and its suited to be used in power amplifier applications.

FEATURES

- * Internal free-wheeling diode
- * Makes efficient anti-saturation operation
- * Low variable storage-time spread
- * Low base drive
- * Very suitable for half bridge light ballast application

SYMBOL**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
5302DL-AA3-R	5302DG-AA3-R	SOT-223	B	C	E	Tape Reel
5302DL-T60-K	5302DG-T60-K	TO-126	B	C	E	Bulk
5302DL-T92-B	5302DG-T92-B	TO-92	E	C	B	Tape Box
5302DL-T92-K	5302DG-T92-K	TO-92	E	C	B	Bulk
5302DL-T92-R	5302DG-T92-R	TO-92	E	C	B	Tape Reel
5302DL-TM3-T	5302DG-TM3-T	TO-251	B	C	E	Tube
5302DL-TN3-R	5302DG-TN3-R	TO-252	B	C	E	Tape Reel

Note: Pin assignment: E: Emitter B: Base C: Collector

5302DG-AA3-R (1) Packing Type (2) Package Type (3) Green Package		(1) B: Tape Box, K: Bulk, T: Tube, R: Tape Reel (2) T60: TO-126, T92: TO-92, TM3: TO-251, TN3: TO-252, AA3: SOT-223 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--	--

MARKING

SOT-223	TO-251 / TO-252
5302D 1 L: Lead Free G: Halogen Free Date Code	UTC 5302D 1 Lot Code L: Lead Free G: Halogen Free Date Code
TO-126	TO-92
UTC 5302D 1 Date Code L: Lead Free G: Halogen Free	UTC 5302D 1 L: Lead Free G: Halogen Free Date Code

■ **ABSOLUTE MAXIMUM RATING** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CBO}	800	V
Collector-Emitter Voltage		V_{CEO}	400	V
Emitter-Base Voltage		V_{EBO}	10	V
Collector Current		I_C	2	A
Collector Peak Current ($t_P<5\text{ms}$)		I_{CM}	4	A
Base Current		I_B	1	A
Base Peak Current ($t_P<5\text{ms}$)		I_{BM}	2	A
Power Dissipation ($T_C\leq 25^{\circ}\text{C}$)	TO-126	P_D	12.5	W
	TO-92		1.6	
	TO-251/ TO-252		25	
	SOT-223		1	
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-65 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **THERMAL DATA**





PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-126	θ_{JA}	122	$^{\circ}\text{C/W}$
	TO-92		160	
	TO-251/ TO-252		100	
	SOT-223		175	
Junction to Case	TO-126	θ_{JC}	10	$^{\circ}\text{C/W}$
	TO-92		80	
	TO-251/ TO-252		5	
	SOT-223		125	

■ **ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Collector-Base Breakdown Voltage	BV _{CBO}	I _C =1mA, I _B =0	800			V
Collector-Emitter Breakdown Voltage	BV _{CEO}	I _C =10mA, I _E =0 (Note)	400			V
Collector-Emitter Breakdown Voltage	BV _{CES}	I _C =1mA, V _{BE} =0V	700			V
Emitter-Base Breakdown Voltage	BV _{EBO}	I _E =1mA, I _C =0	10			V
Collector Cutoff Current	I _{CBO}	V _{CB} =800V, I _E =0			1	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} =9V, I _C =0			1	μA
ON CHARACTERISTICS						
DC Current Gain	h _{FE1}	V _{CE} =5V, I _C =10mA	10			
	h _{FE2}	V _{CE} =5V, I _C =400mA	10		40	
	h _{FE3}	V _{CE} =5V, I _C =1A	5			
Collector-Emitter Saturation Voltage	V _{CE(SAT1)}	I _C =0.5A, I _B =0.1A (Note)			0.5	V
	V _{CE(SAT2)}	I _C =1A, I _B =0.25A (Note)		1.1	1.5	
Base-Emitter Saturation Voltage	V _{BE(SAT1)}	I _C =0.5A, I _B =0.1A (Note)			1.1	V
	V _{BE(SAT2)}	I _C =1A, I _B =0.25A (Note)			1.2	
SWITCHING CHARACTERISTICS						
Turn On Time	t _{ON}	V _{CC} =250V, I _C =1A,		0.15	0.3	μS
Fall Time	t _F	I _{B1} =I _{B2} =0.2A, t _P =25uS		0.2	0.4	μS
Storage Time	t _{STG}	Duty Cycle<1%		0.5	0.9	μS
DIODE						
Forward Voltage Drop	V _F	I _C =1A			1.4	V
Fall Time	t _F	I _C =1A			800	μS

Note: Pulsed duration = 300 μS , Duty cycle $\leq 2\%$

■ TYPICAL CHARACTERISTICS

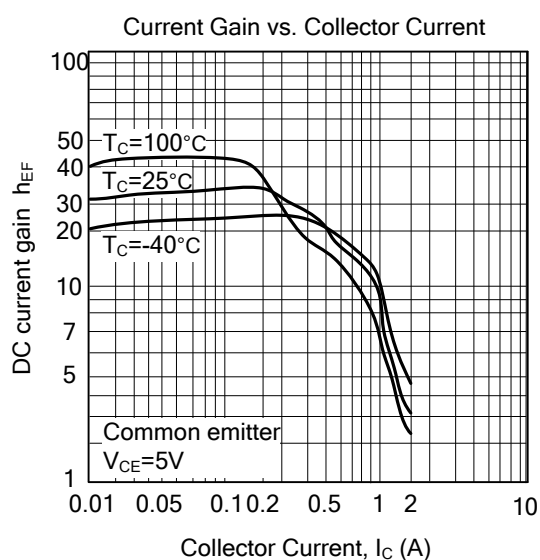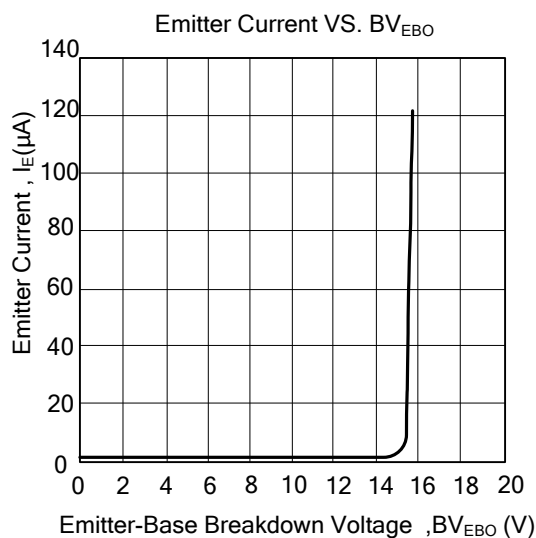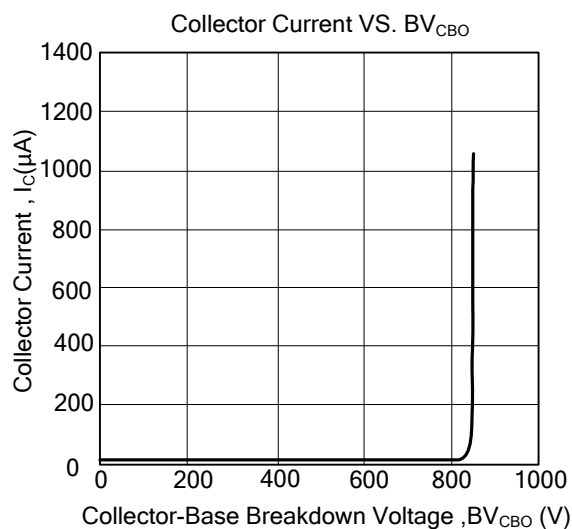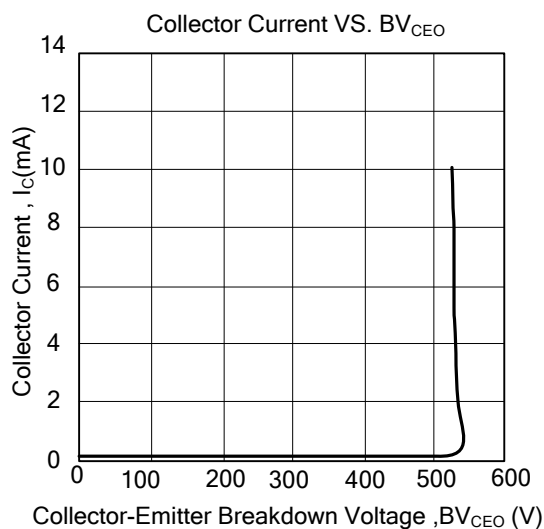

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.