



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 1621.25 MHz SMD 3X3mm (BW=10.5MHz)

TST Part No.: TA2395A

Customer Part No.: _____

Customer signature required


Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Andy Yu 

Date: _____ 4, 12, 2018

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1621.25 MHz

MODEL NO.:TA2395A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C
5. ESD Machine Mode : 50V
6. ESD Human Body Mode : 100V
7. Moisture Sensitive Level (MSL): Level 1

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance (single) :


$Z_s = 50 \ \Omega$

Terminating load impedance (differential) :

$Z_L = 200 \ \Omega \ // \ 30 \text{ nH}$

Item	Unit	Min.	Typ.	Max.
Center Frequency Fc	MHz	-	1621.25	-
Insertion Loss (1616~1626.5 MHz)	dB	-	1.7	3
Amplitude ripple (1616 MHz ~ 1626.5 MHz)	dB	-	0.2	1.5
Input Return Loss (1616 MHz ~ 1626.5 MHz)	dB	8	10	-
Output Return Loss (1616 MHz ~ 1626.5 MHz)	dB	9	12	-
Attenuation (reference level from 0 dB)				
200 ~ 1500 MHz	dB	31	44	-
1500 ~ 1570 MHz	dB	25	27	-
1570 ~ 1580 MHz	dB	16	24	-
1580 ~ 1591 MHz	dB	6	13	-
1652 ~ 1667 MHz	dB	8	15	-
1667 ~ 1690 MHz	dB	14	21	-
1690 ~ 1800 MHz	dB	24	29	-
1800 ~ 2200 MHz	dB	31	40	-
2200 ~ 3000 MHz	dB	26	35	-

C.OUTLINE DRAWING:

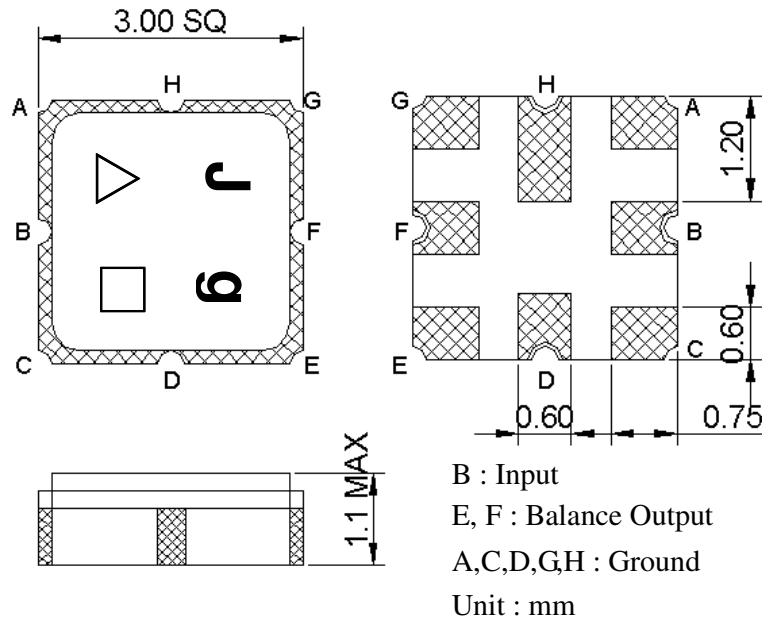


△ : Year Code (2009->9, 2010->0,..., 2018->8)

□ : Date Code (Follow the table from planner each year)


Date Code Table

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z



D. MEASUREMENT CIRCUIT:




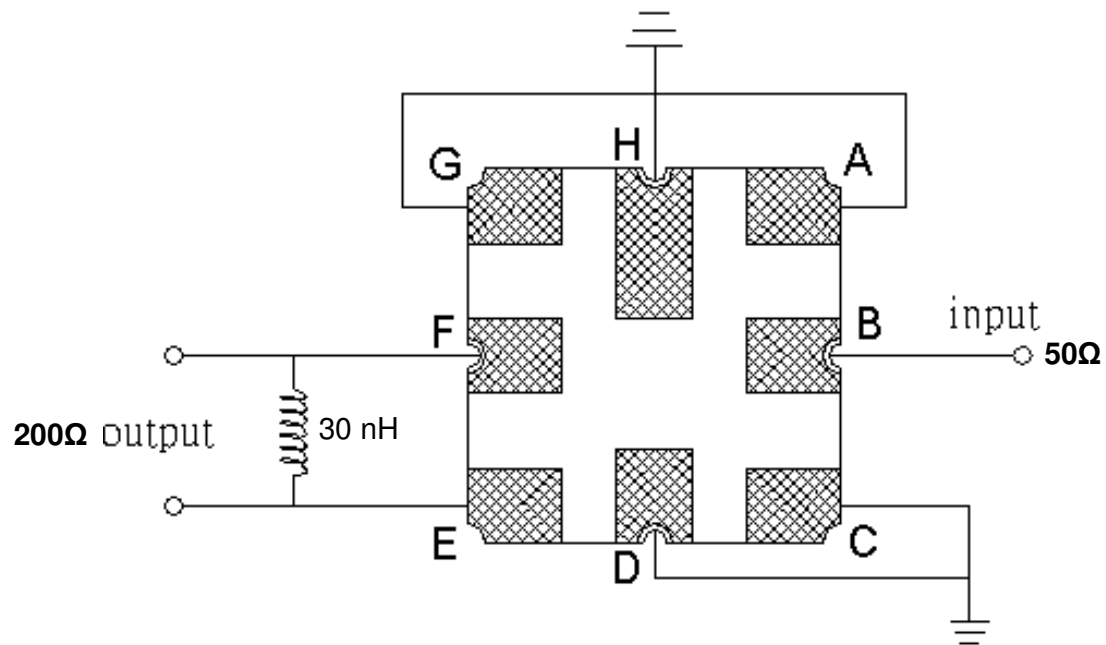


E. PCB Footprint:

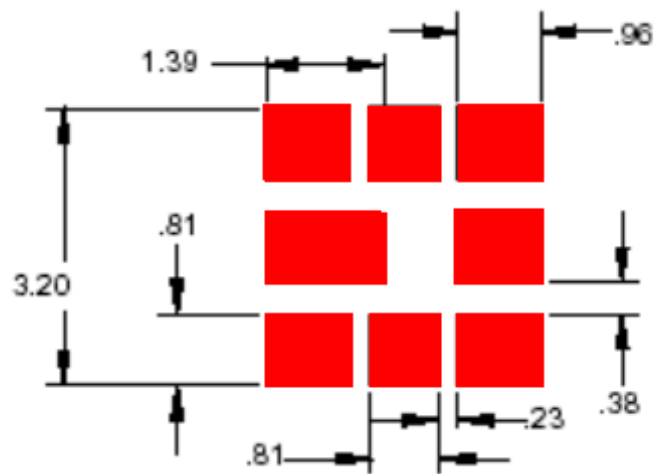

F. Frequency Characteristics :

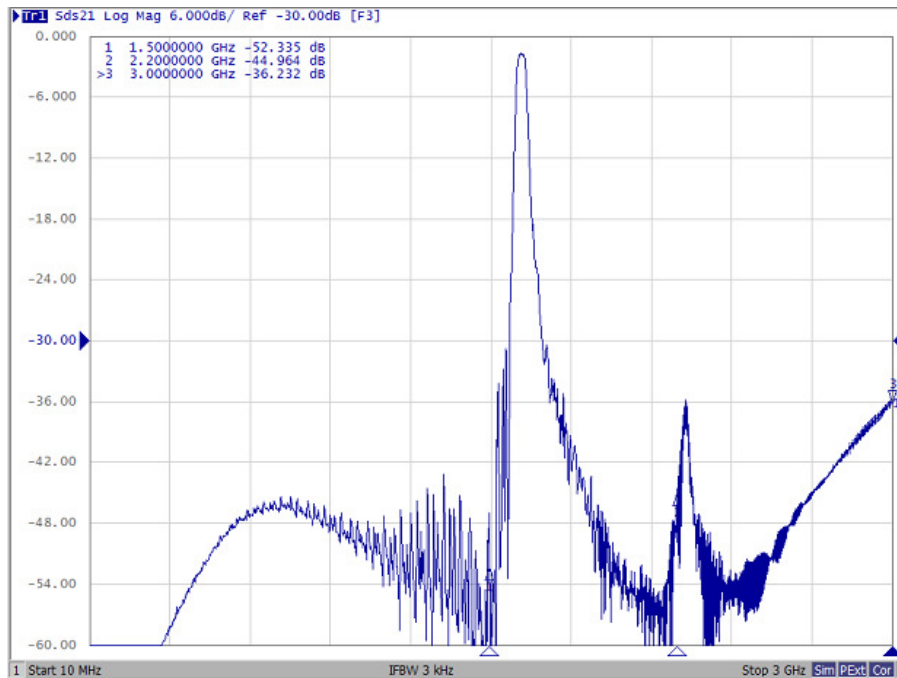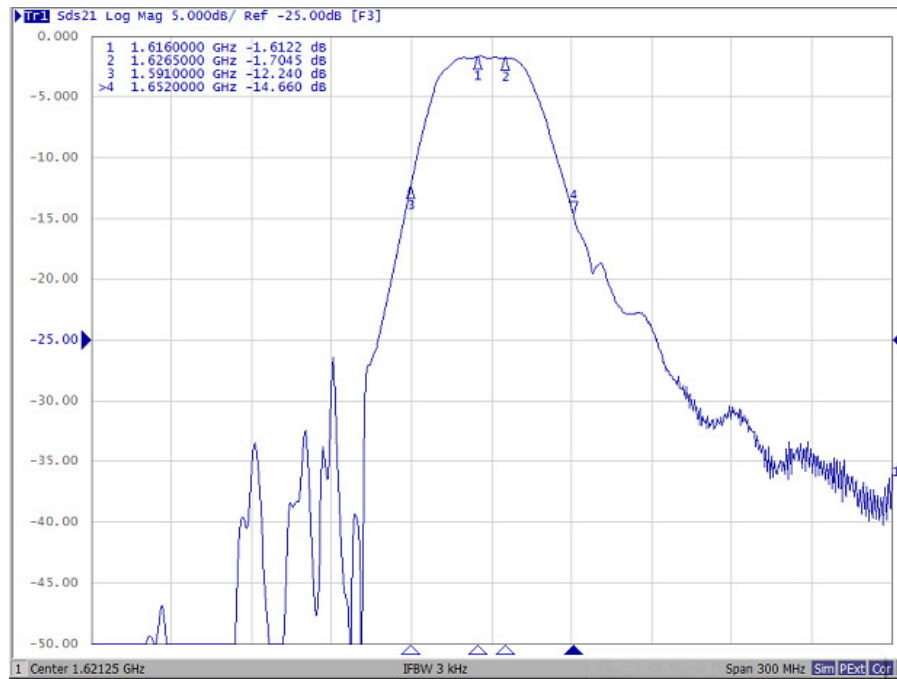


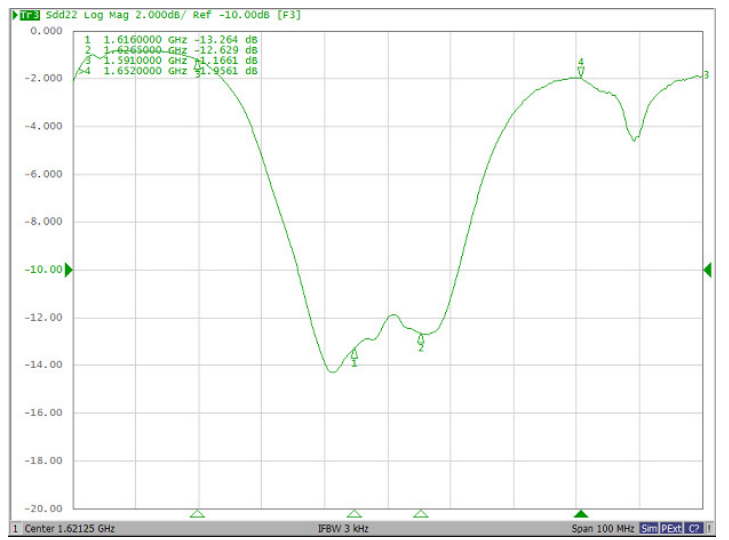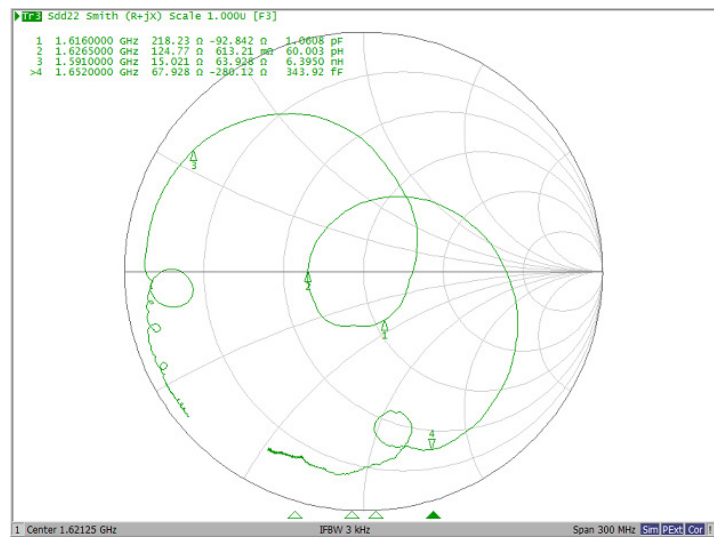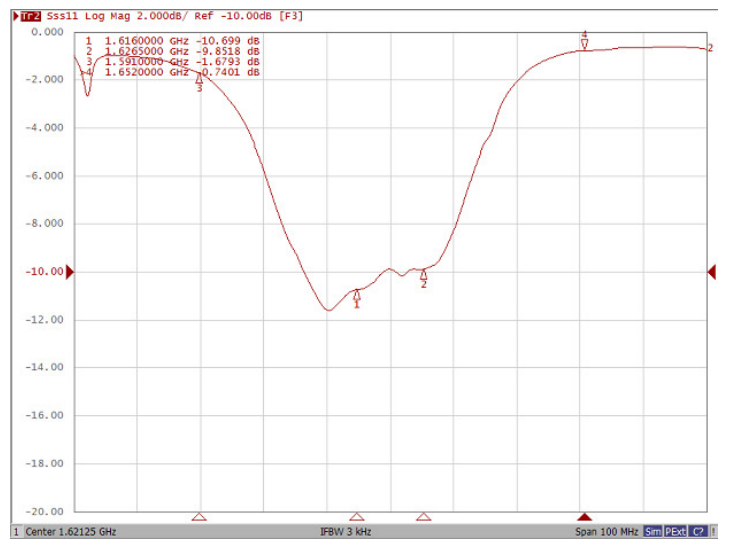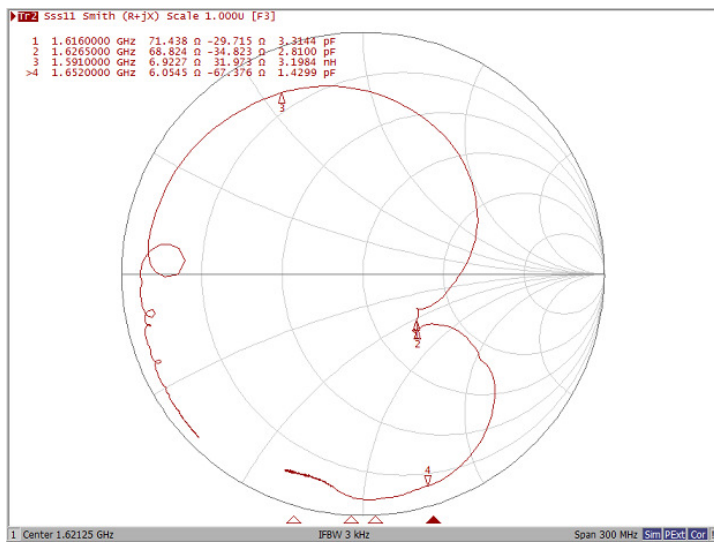


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

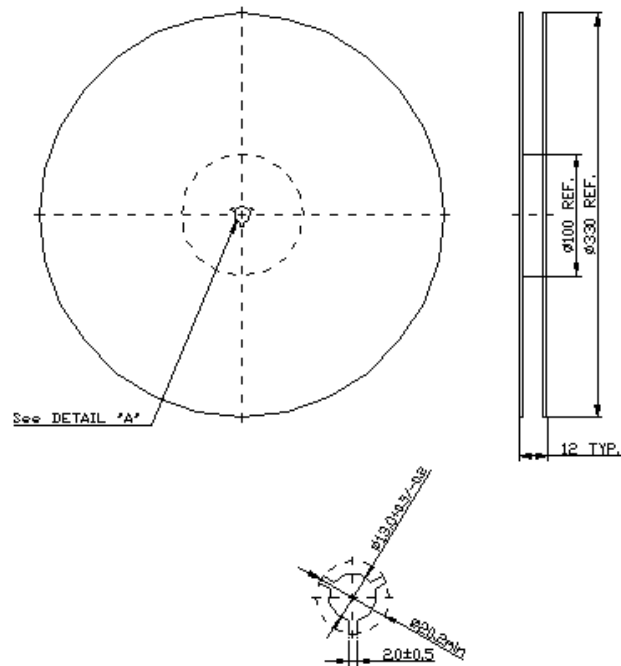

2. TAPE DIMENSION

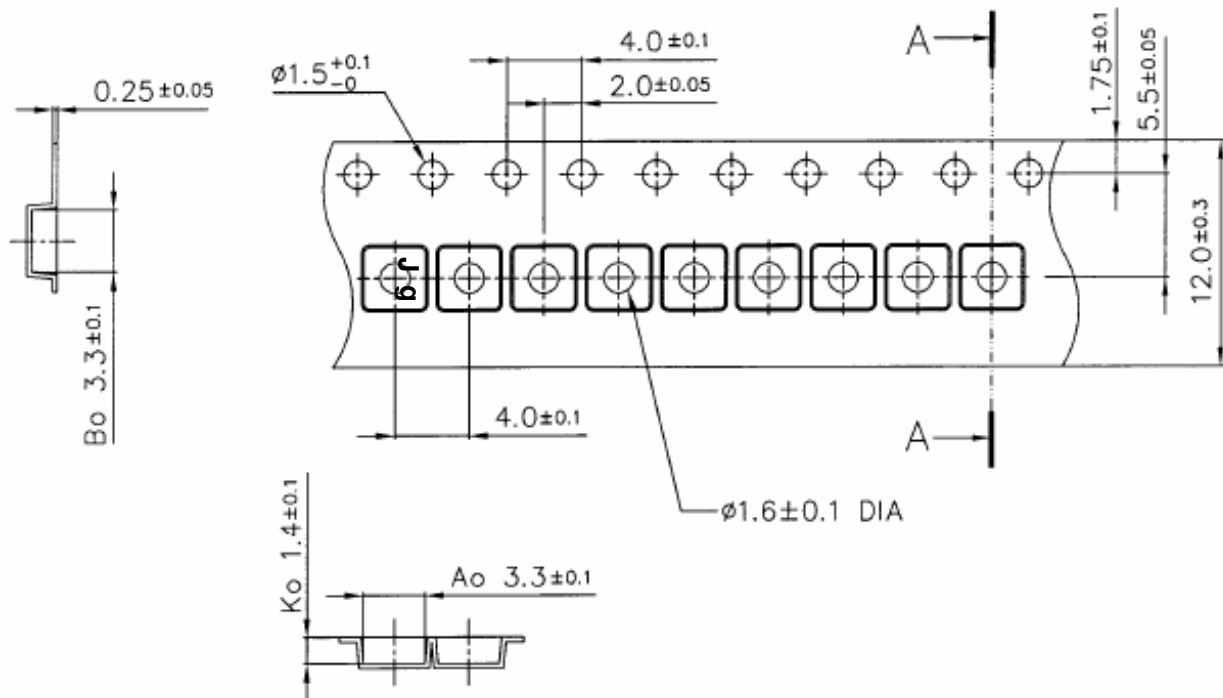

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

