



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: TCSAW Filter 2332.5 MHz SMD 1.1X0.9 mm (BW=25MHz)

TST Parts No.: TA2392ATCA

Customer Parts No.: _____


Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau 

Approval by: _____ Andy Yu 

Date: _____ 2021/05/28

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

TCSAW Filter 2332.5MHz BW25MHz SMD 1.1x0.9mm

MODEL NO.:TA2392ATCA

REV. NO.:2.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -40°C to +105°C
4. Storage Temperature: -40°C to +125°C
5. ESD Machine Mode : 50V
6. ESD Human Body Mode : 100V
7. Moisture Sensitive Level (MSL): Level 2a

RoHS Compliant

Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:

Temperature range for specification : $T_{spec} = -40^{\circ}\text{C}$ to $+105^{\circ}\text{C}$


Terminating source impedance : $Z_s = 50\ \Omega$

Terminating load impedance : $Z_L = 50\ \Omega$


Item	Unit	Min.	Typ.	Max.
Center Frequency F_c	MHz	-	2332.5	-
Min. Insertion Loss (2320~2345 MHz) α	dB	-	3.1	-
Max. Insertion Loss (2320~2345 MHz) IL	dB	-	4.6	7
Amplitude Ripple (2320~2324.5 MHz)	dB _{p-p}	-	1.3	2.3
Amplitude Ripple (2324.5~2328.2 MHz)	dB _{p-p}	-	0.6	1.2
Amplitude Ripple (2328.2~2332.5 MHz)	dB _{p-p}	-	0.2	1.2
Amplitude Ripple (2332.5~2334.38 MHz)	dB _{p-p}	-	0.4	1.2
Amplitude Ripple (2334.38~2336.25 MHz)	dB _{p-p}	-	0.2	1.2
Amplitude Ripple (2336.25~2337.75 MHz)	dB _{p-p}	-	0.2	1.2
Amplitude Ripple (2337.75~2341.25 MHz)	dB _{p-p}	-	0.3	1.2
Amplitude Ripple (2341.25~2343.125 MHz)	dB _{p-p}	-	0.2	1.2
Amplitude Ripple (2343.125~2345 MHz)	dB _{p-p}	-	0.5	2.1
VSWR (2320~2345 MHz)		-	1.8	2.1
Attenuation (refer to min. insertion loss α)				
100 ~ 800 MHz	dB	35	65	-
800 ~ 2100 MHz	dB	31	42	-
2100 ~ 2275 MHz	dB	32	37	-
2275 ~ 2288 MHz	dB	30	32	-

2288 ~ 2300 MHz		dB	25	32	-
2300 ~ 2310 MHz		dB	15	23	-
2310 ~ 2315 MHz		dB	3.5	7.5	-
2350 ~ 2355 MHz		dB	3.5	5.5	-
2355 ~ 2365 MHz		dB	13	17	-
2365 ~ 2377 MHz		dB	39	42	-
2377 ~ 2390 MHz		dB	35	39	-
2390 ~ 3000 MHz		dB	28	30	-
Temperature Coefficient		ppm/°C	-	-6.5	-


C. MEASUREMENT CIRCUIT:

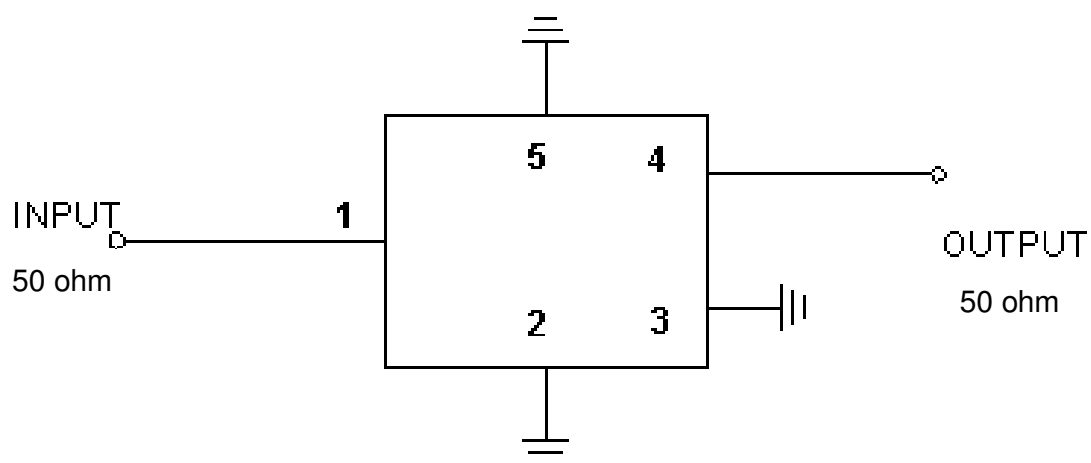

D. PCB Footprint :

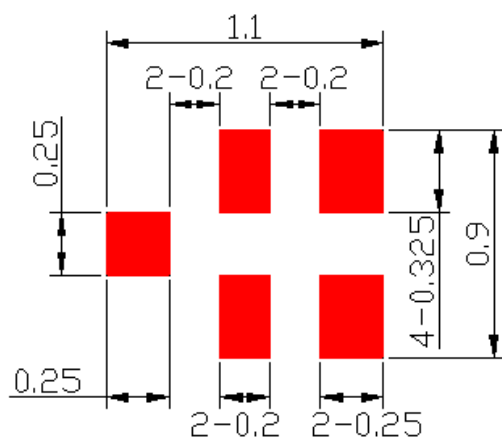


E.OUTLINE DRAWING:

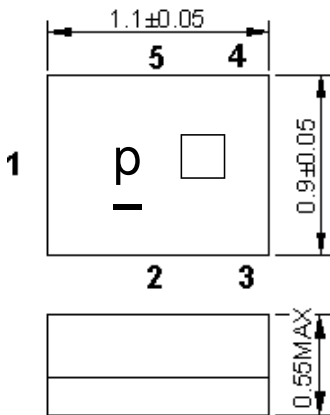

All tolerances are ± 0.05 mm unless otherwise specified
Coplanarity : 0.1 mm max.

1 to 5 : Pin No.

Unit : mm


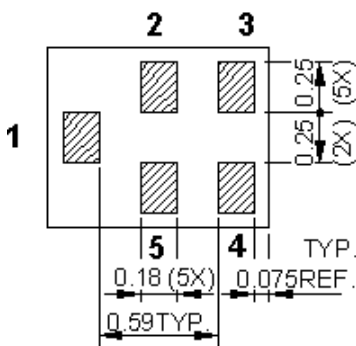





Pin No.	Symbol	Function
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground

□ : Year/Month Code (Follow the table)

YEAR/Month	1	2	3	4	5	6	7	8	9	10	11	12
2013/2021	A	B	C	D	E	F	G	H	J	K	L	M
2014/2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2015/2023	a	b	c	d	e	f	g	h	j	k	l	m
2016/2024	n	p	q	r	s	t	u	v	w	x	y	z
2017/2025	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>	<u>J</u>	<u>K</u>	<u>L</u>	<u>M</u>
2018/2026	<u>N</u>	<u>P</u>	<u>Q</u>	<u>R</u>	<u>S</u>	<u>T</u>	<u>U</u>	<u>V</u>	<u>W</u>	<u>X</u>	<u>Y</u>	<u>Z</u>
2019/2027	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>	<u>g</u>	<u>h</u>	<u>j</u>	<u>k</u>	<u>l</u>	<u>m</u>
2020/2028	<u>n</u>	<u>p</u>	<u>q</u>	<u>r</u>	<u>s</u>	<u>t</u>	<u>u</u>	<u>v</u>	<u>w</u>	<u>x</u>	<u>y</u>	<u>z</u>

F. Frequency Characteristics:

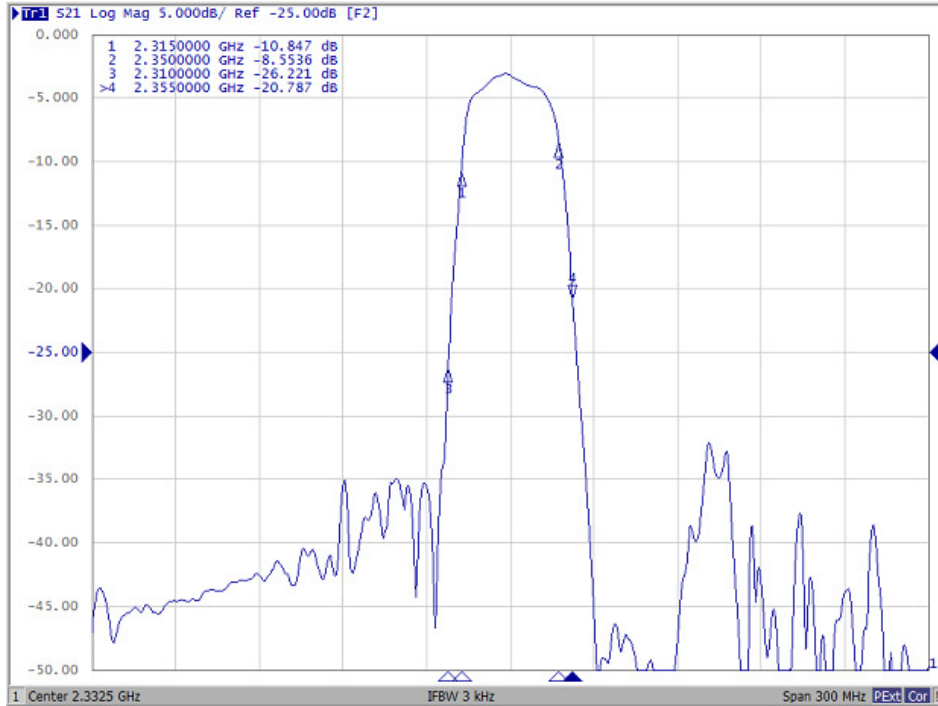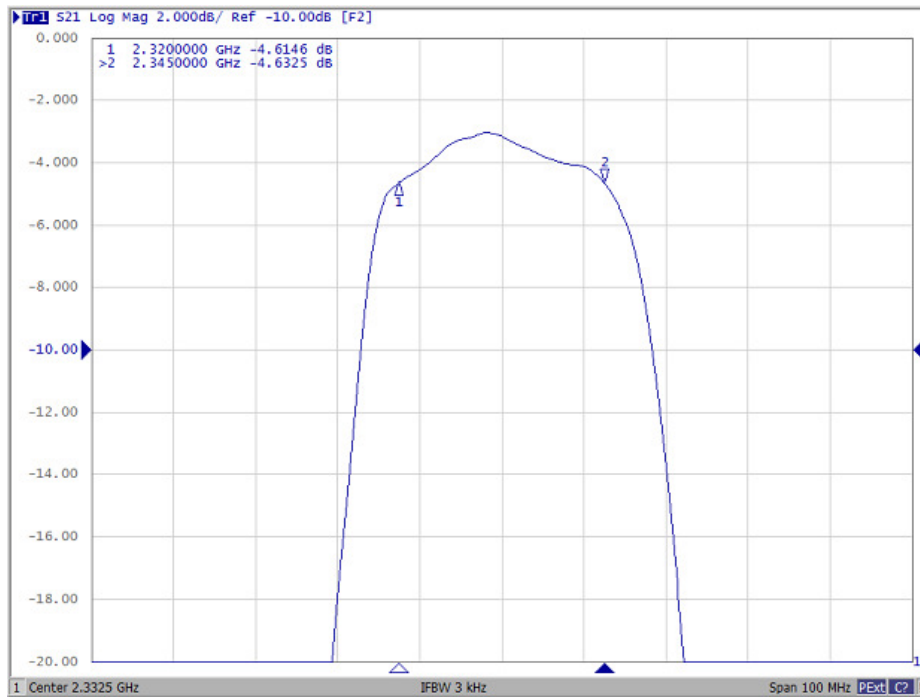


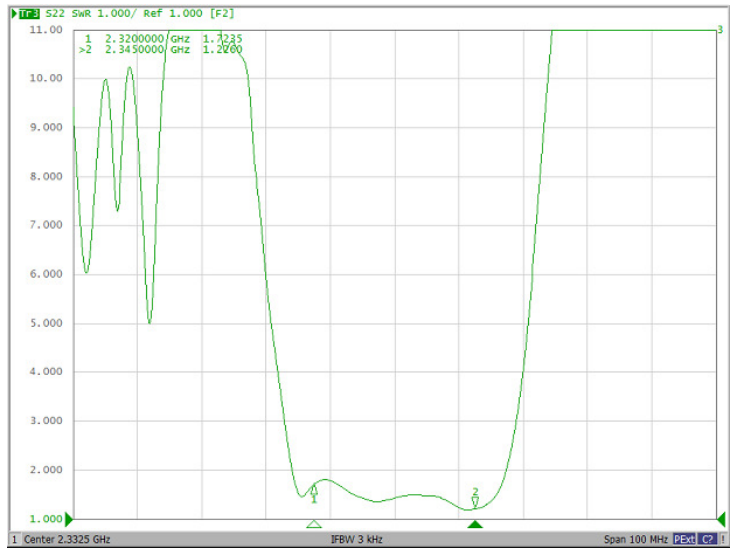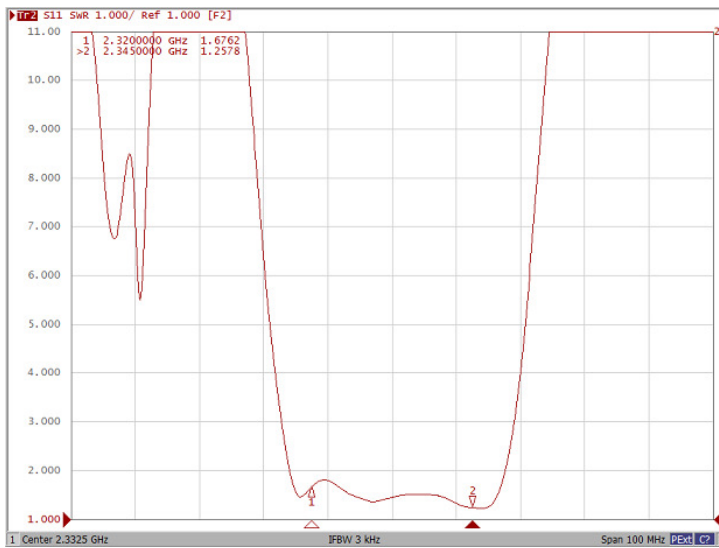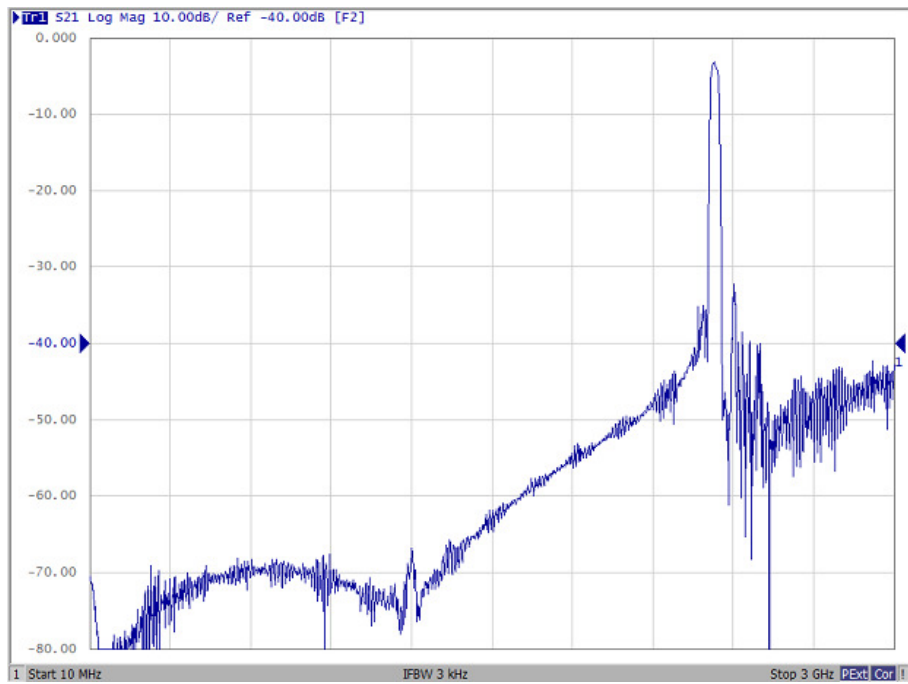


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

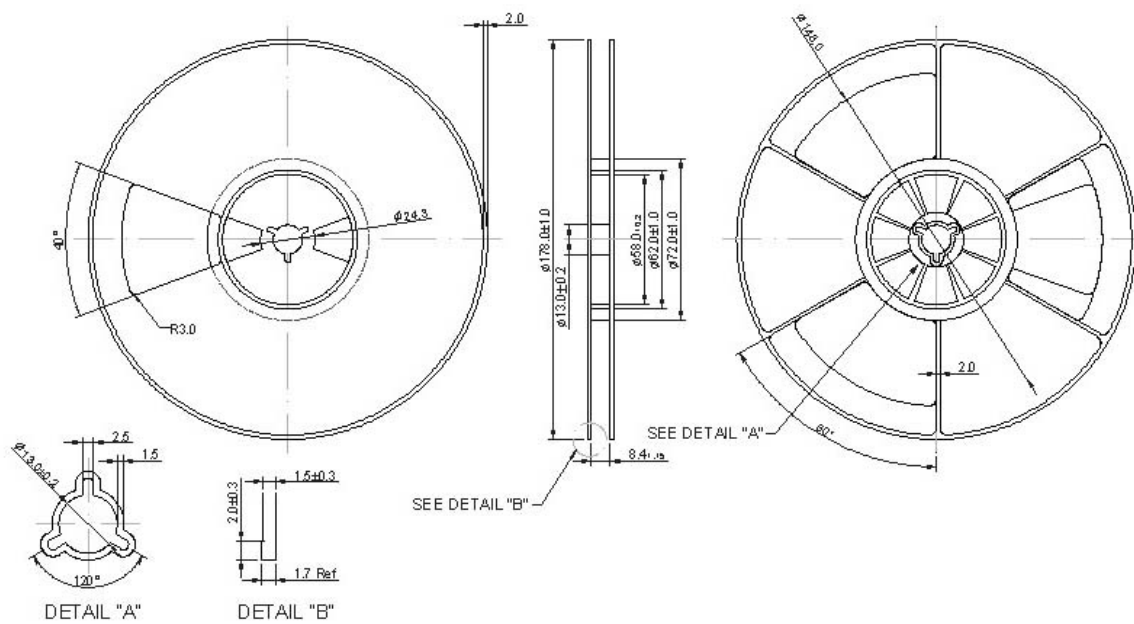

2.TAPE DIMENSION

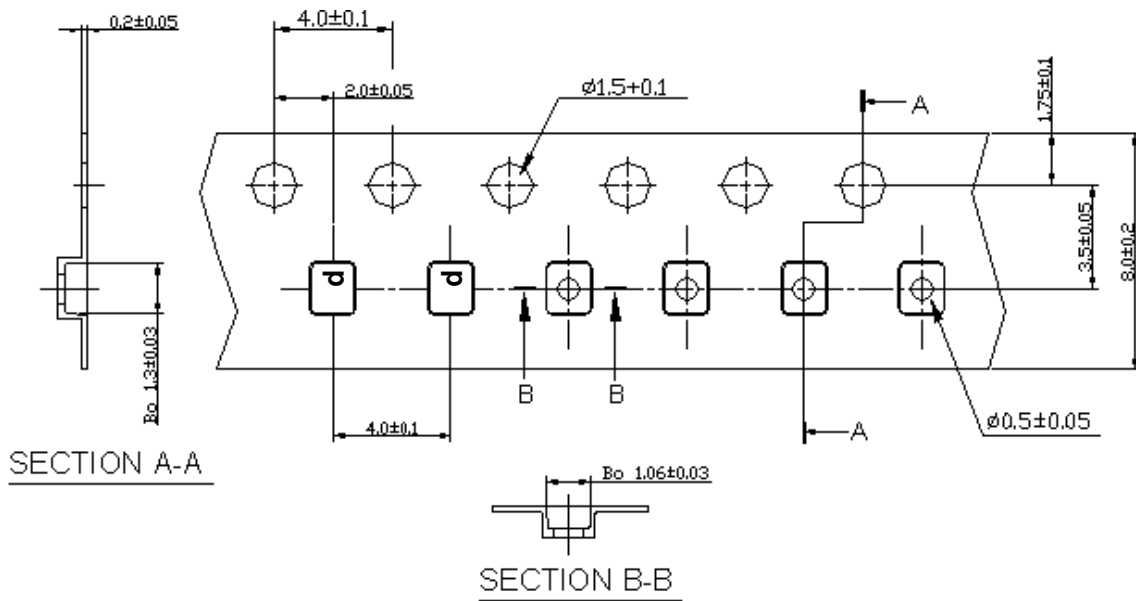

Direction of Feed



H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

