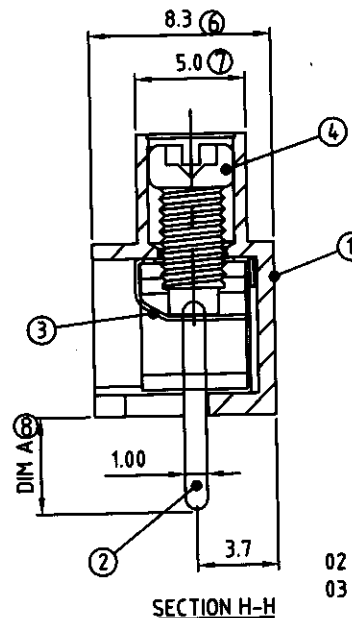
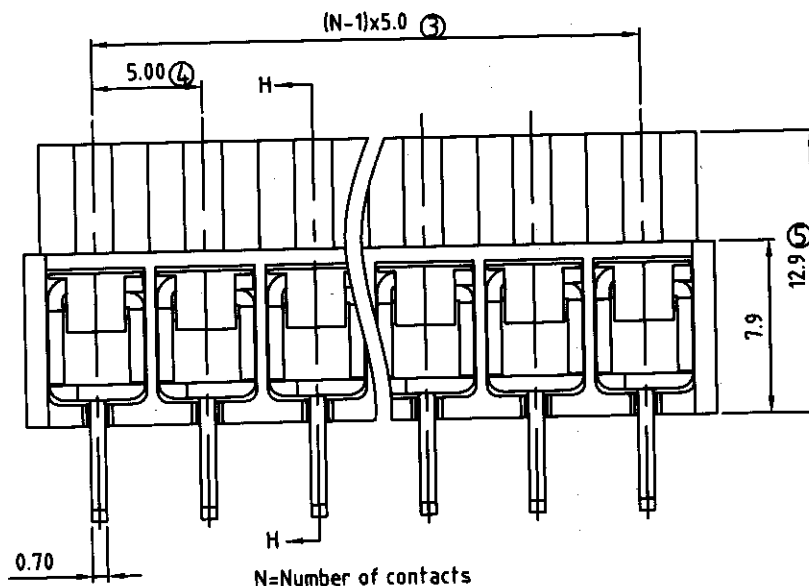
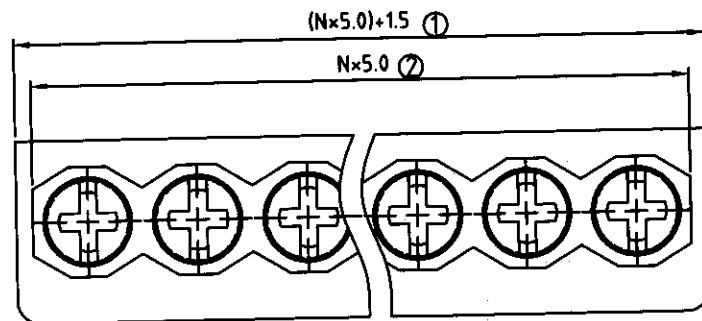


RECOMMENDED P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△	01/11/06	Standard spec is changed.	xionghaitao
△	10/09/06	VDE wire range changed from 0.75-1.5mm ² to 0.75-4.0mm ²	Tason
△	10/09/06	Solid wire and Stranded wire changed from 112-18 to 112-20	Tason
△	02/27/07	Soldering temperature changed from 245° to 250°	Tason
△	02/27/07	Part NO is Changed	Tason

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item 1 Insulator(housing):Thermoplastic (UL 94V-0)
- Item 2 Metal housing: Brass ,Tin plated
- Item 3 Contacts:Stainless steel
- Item 4 Terminal screw: Steel Zinc plating"+/-"slot type

△ Electrical cULus/VDE

- Voltage rating: 300VAC/450VAC
- Current rating: 10A/17.5A
- △ ● Wire range:0.75-4.0mm²
- △ ● Solid wire(AWG): 12-20
- △ ● Stranded wire(AWG): 12-20
- Torque: 3.5Lb-In/0.4Nm
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -30°C to +105°C
- △ ● Soldering temperature: 250°C±10°C/5 Sec
- SAFETY APPROVAL DATA: US

△ T4 xx 04 x x xxxx G

02 2 CONTACTS	0 Black	0 4.4mm	0000:"@Logo (Standard)	RoHS
03 3 CONTACTS	5 Green	1 3.0mm	000A:"ANYTEK"Logo	Pb<40,000ppm
...	6 Blue		Any special item by	
24 24 CONTACTS	8 Grey		customer request,	
			please contact sales	
			department.	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	T4-5.0mm 2P-30P					
PART NO.	T4xx04xxxxxxG			DWG NO.	8T40001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
						UNIT: mm
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	REV: E
					X° ±1°	