
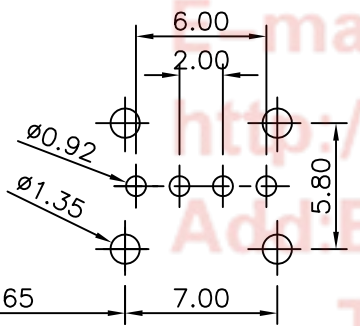
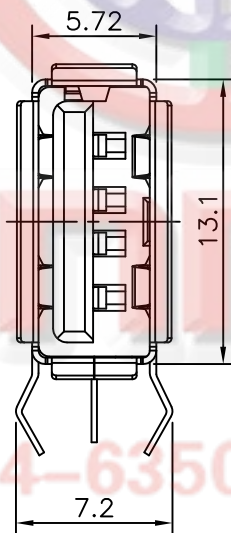
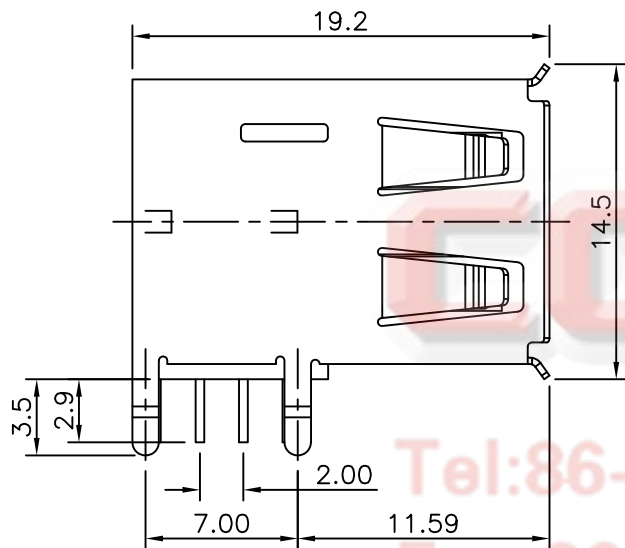


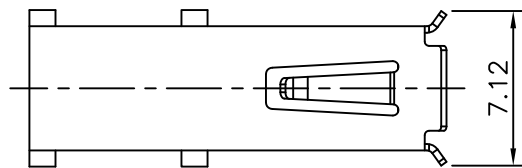

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/09/08'	~	LJC 08/09/08'
B	DRAWING UPDATE	JLZ 04/01/15'	~	

NOTES:

1. SPECIFICATIONS:

- 1.0 CONTACT RESISTANCE: 30mΩ max.
- 1.1 INSULATOR RESISTANCE: 1000MΩ min.AT DC 500V.
- 1.2 CURRENT RATING: 1.5A.
- 1.3 VOLTAGE RATING: 30V AC/DC.
- 1.4 DIELECTRIC STRENGTH: AC 500V FOR 1 Minute.
- 1.5 TEMPERATURE RANGE: -40°C ~ +105°C .

2. MATERIALS:

- 2.0 HOUSING: PBT+30% GLASS FIBER(UL 94-0).
- 2.1 CONTACT: COPPER ALLOY
- 2.2 SHELL: COPPER ALLOY OR STEEL

3. PRODUCT NUMBER CODE:

DS1095-01-X X X X - X

SHELL MATERIAL

Fe: Steel

N/A Code: Copper Alloy

CONTACT PLATING

0: Selective gold flash

03: Selective gold 3u"

30: Selective gold 30u"

MOUNTING TYPE

R: R/A

SHELL PLATING:

N: Nickel

6: Tin

COLOR OF HOUSING:

W: WHITE

B: Black

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	USB A TYPE UP RIGHT ANGLE TYPE
SHEET SIZE A4	SERIES DS1095-01 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1095-01-XXRXX-X-B



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD