


N-Channel Enhancement Mode Power MOSFET

Description The GT130N03D5 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It can be used in a wide variety of applications.		 Schematic Diagram	
General Features ● V_{DS} 30V ● I_D (at $V_{GS} = 10V$) 115A ● $R_{DS(ON)}$ (at $V_{GS} = 10V$) < 3.5mΩ ● $R_{DS(ON)}$ (at $V_{GS} = 4.5V$) < 6mΩ ● 100% Avalanche Tested ● RoHS Compliant		 DFN5X6-8L	
Application ● Synchronous Rectification in SMPS or LED Driver ● UPS ● Motor Control ● BMS ● High Frequency Circuit			
Device	Package	Marking	Packaging
GT130N03D5	DFN5X6-8L	GT130N03	2500pcs/Reel

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Continuous Drain Current	I_D	115	A
Pulsed Drain Current (note1)	I_{DM}	345	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	P_D	36	W
Single pulse avalanche energy (note3)	E_{AS}	156	mJ
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 To 150	$^\circ\text{C}$

Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Ambient	R_{thJA}	40	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	R_{thJC}	2.8	$^\circ\text{C/W}$



Specifications $T_J = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
Static Parameters						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	30	--	--	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 30V, V _{GS} = 0V	--	--	1	μA
Gate-Source Leakage	I _{GSS}	V _{GS} = ±20V	--	--	±100	nA
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1	1.5	2.2	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = 10V, I _D = 50A	--	2.5	3.5	mΩ
		V _{GS} = 4.5V, I _D = 50A	--	3.5	6	
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 15V, f = 1.0MHz	--	1330	--	pF
Output Capacitance	C _{oss}		--	360	--	
Reverse Transfer Capacitance	C _{rss}		--	55	--	
Total Gate Charge	Q _g	V _{DS} = 15V, I _D = 20A, V _{GS} = 10V	--	20	--	nC
Gate-Source Charge	Q _{gs}		--	3.5	--	
Gate-Drain Charge	Q _{gd}		--	3.5	--	
Turn-on Delay Time	t _{d(on)}	V _{DS} = 15V, I _D = 20A, R _G = 3Ω	--	8	--	ns
Turn-on Rise Time	t _r		--	3	--	
Turn-off Delay Time	t _{d(off)}		--	20	--	
Turn-off Fall Time	t _f		--	3	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I _S	T _C = 25°C	--	--	40	A
Body Diode Voltage	V _{SD}	T _J = 25°C, I _S = 1A, V _{GS} = 0V	--	--	1.2	V



Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. Identical low side and high side switch with identical R_G
3. EAS condition : $T_J = 25^\circ\text{C}$, $V_{DD} = 30V$, $V_{GS} = 10V$, $L = 0.5mH$, $R_G = 25\Omega$



Gate Charge Test Circuit

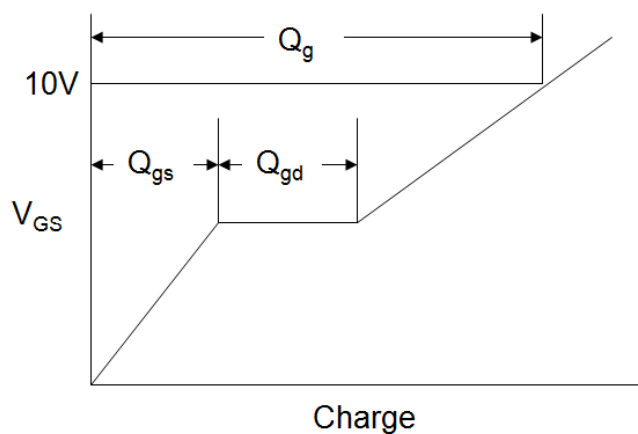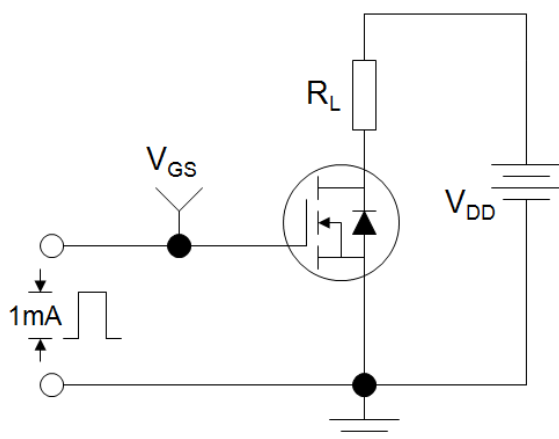

EAS Test Circuit

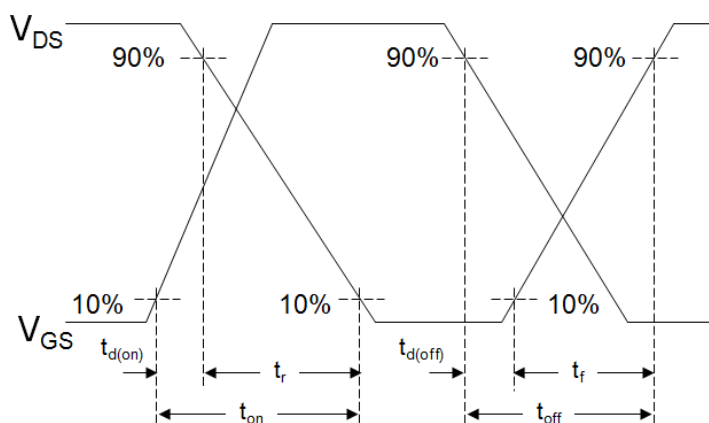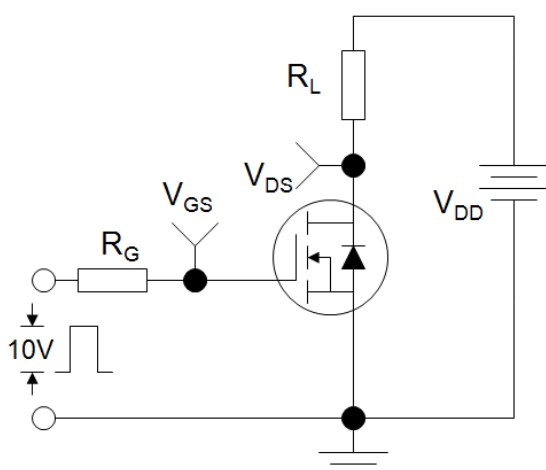

Switch Time Test Circuit

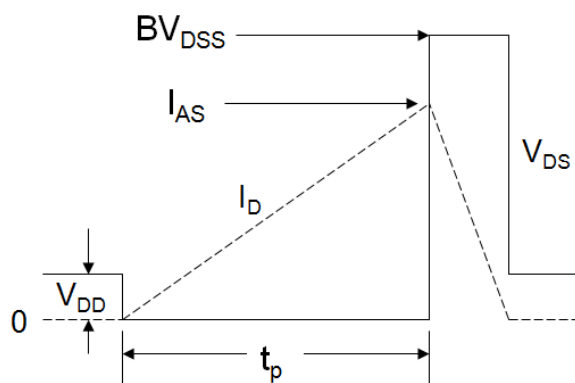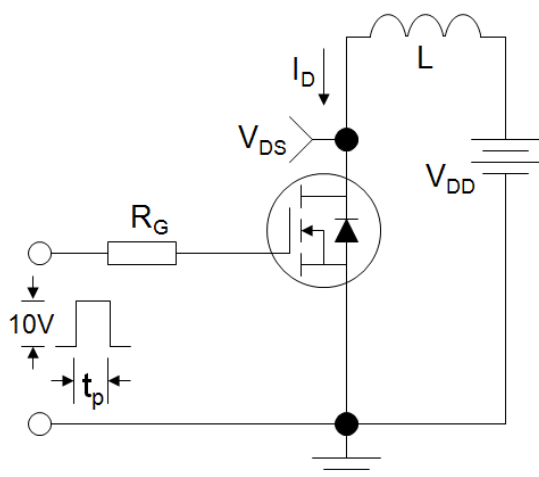

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 1. Output Characteristics

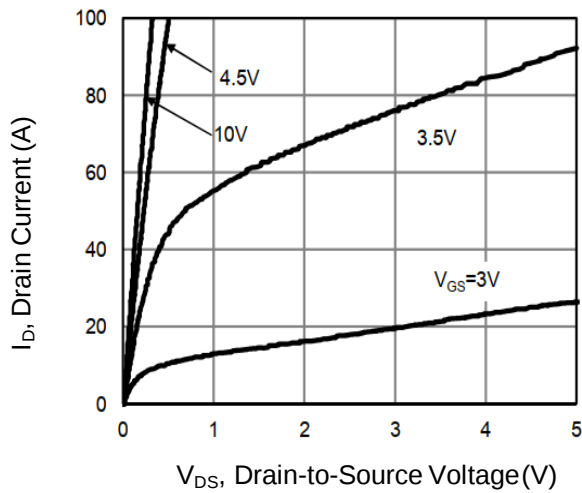


Figure 2. Transfer Characteristics

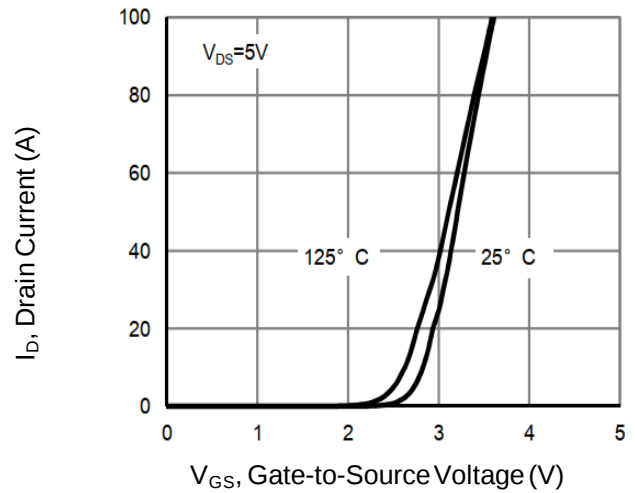


Figure 3. $R_{DS(on)}$ -Drain Current

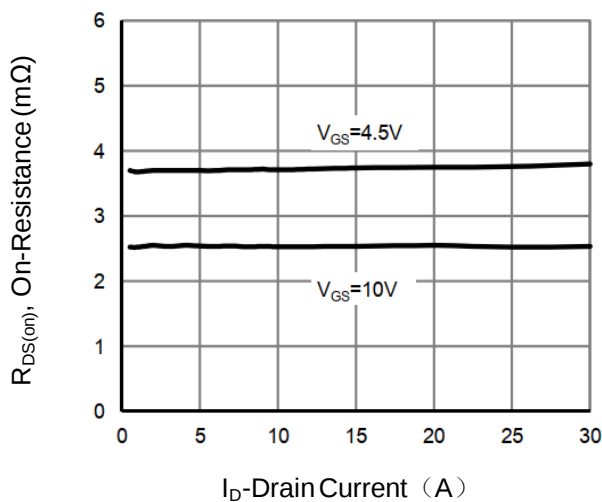


Figure 4. Gate Charge

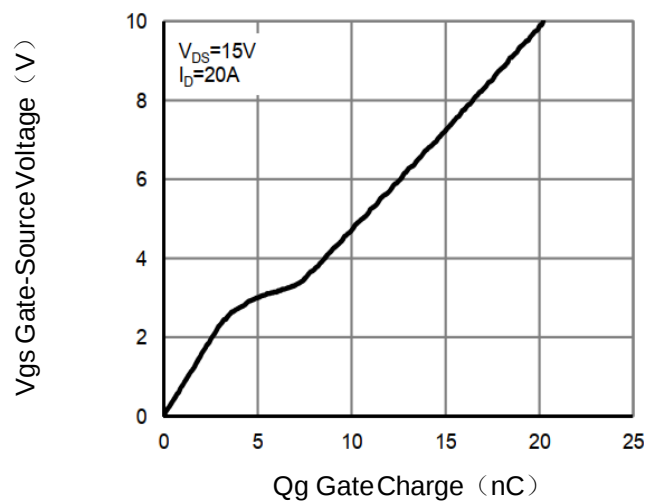


Figure 5. Capacitance vs V_{DS}


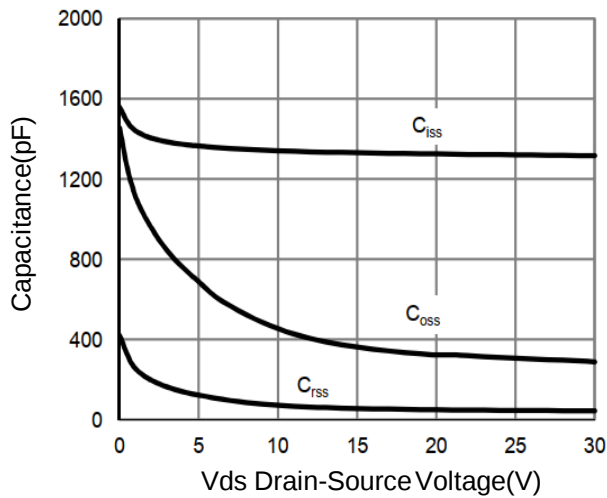


Figure 6. Source-Drain Diode Forward

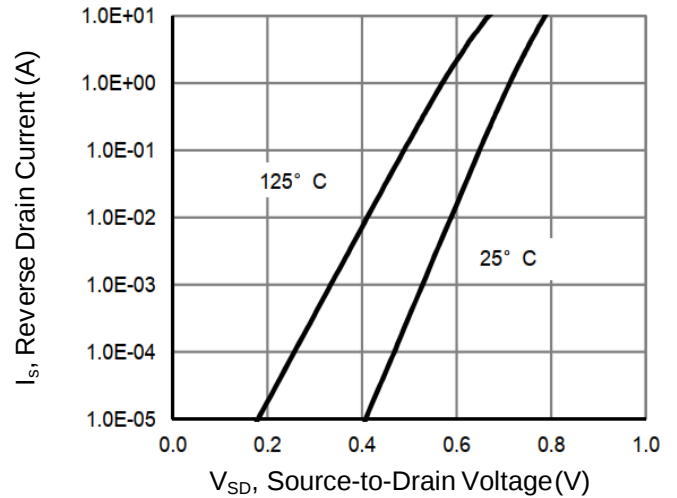

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 7. Drain-Source On-Resistance

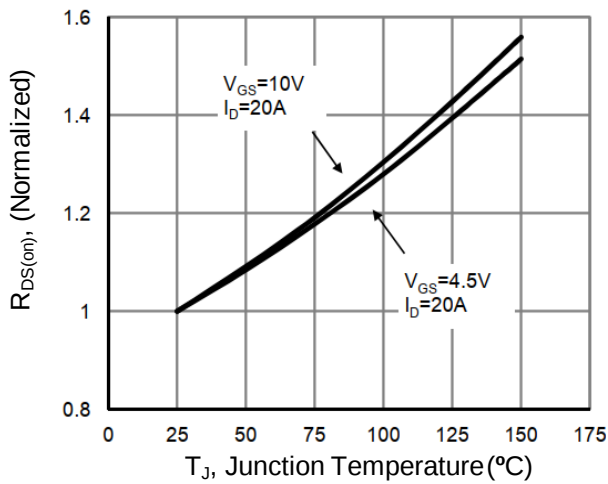


Figure 8. On-Resistance vs. Gate-Source Voltage

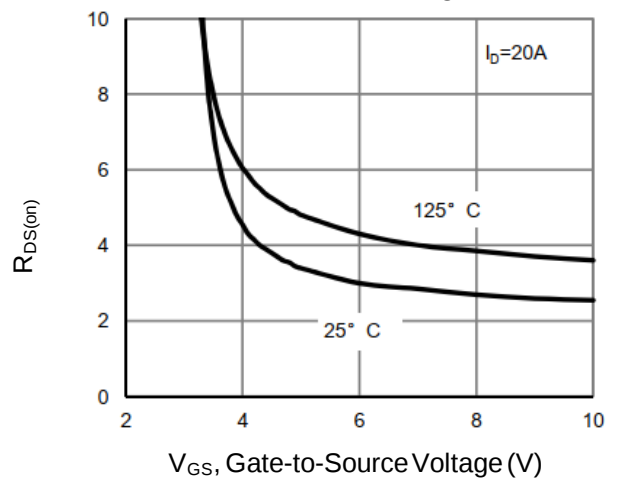


Figure 9. Normalized Maximum Transient Thermal Impedance



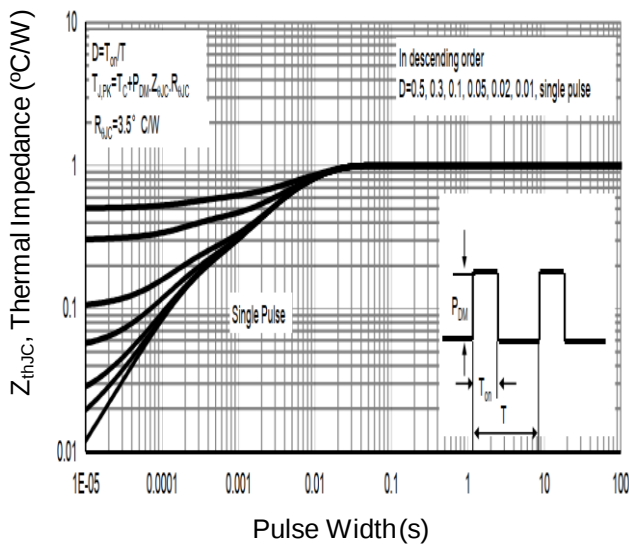


Figure 10. Safe Operation Area

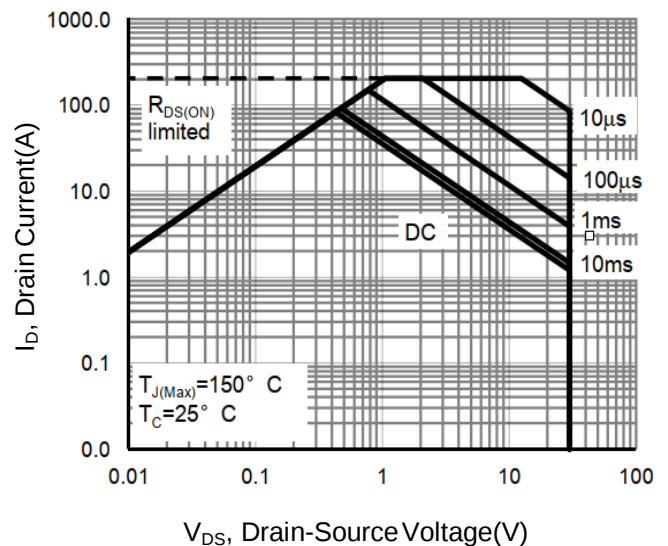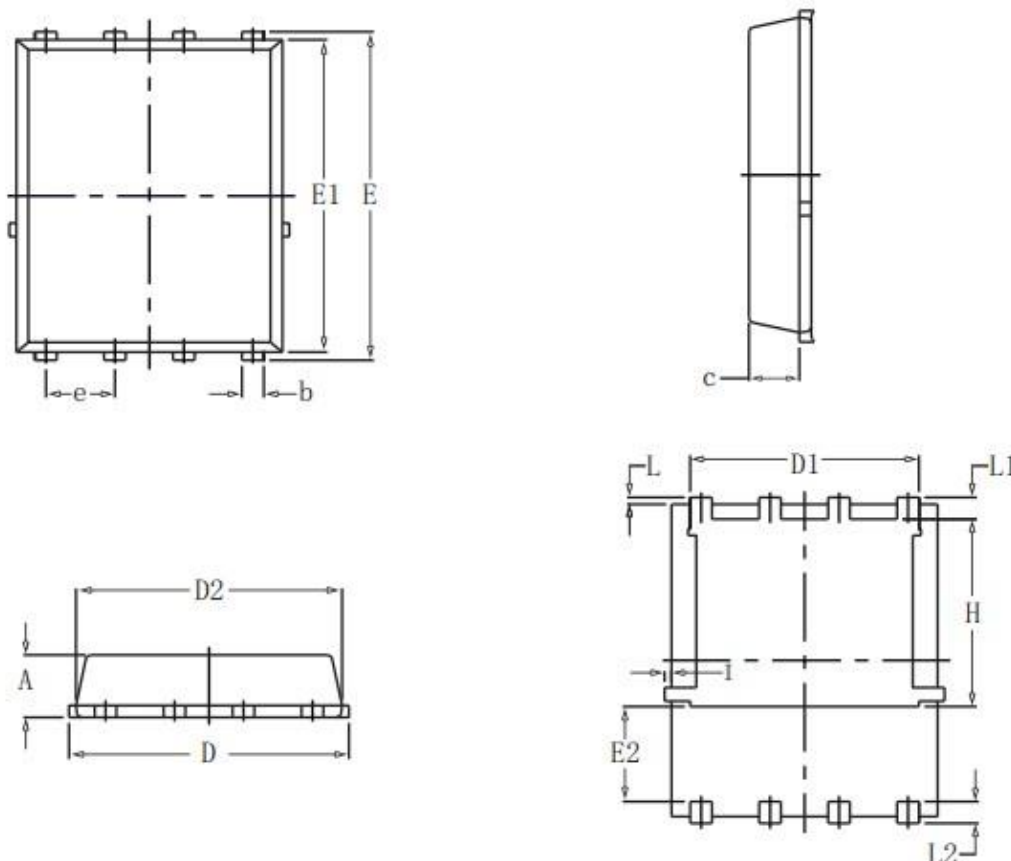

DFN5~~X~~ -8L Package Information

SYMBOL	COMMON			
	MM		INCH	
	MIN	MAX	MIN	MAX
A	1.03	1.17	0.0406	0.0461
b	0.34	0.48	0.0134	0.0189
c	0.824	0.970	0.0324	0.0382
D	4.80	5.40	0.1890	0.2126
D1	4.11	4.31	0.1618	0.1697
D2	4.80	5.00	0.1890	0.1969
E	5.59	6.15	0.2343	0.2421
E1	5.65	5.85	0.2224	0.2303
E2	1.60	-	0.0630	-
e	1.27 BSC		0.05 BSC	
L	0.05	0.25	0.0020	0.0098
L1	0.38	0.50	0.0150	0.0197
L2	0.38	0.50	0.0150	0.0197
H	3.30	3.50	0.1299	0.1378
I	-	0.18	-	0.0070