

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/31/17'	~	

NOTES:

1. MATERIAL

- 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT MATERIAL:COPPER ALLOY.



2. SPECIFICATION

- 2.1 CURRENT RATING:1.0 Amp.
- 2.2 INSULATION RESISTANCE:1000MΩ Min.
- 2.3 DIELECTRIC WITHSTANDING:300VAC.
- 2.4 CONTACT RESISTANCE:20mΩ Max.
- 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

3. PRODUCT NUMBER CODE:

DS1064-01 - X X X X X X - X

- PLATING LEVEL
3A: 3A LEVEL
- PACKING TYPE
B: TUBE
T: TRAY
- DIM H TYPE
H12.0
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- MOUNTING TYPE
V:V/T TYPE
- No.OF CONTACTS
06 ~ 40

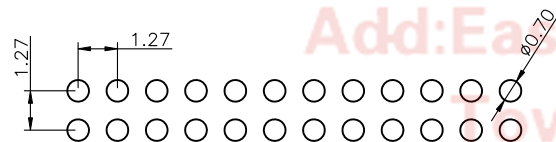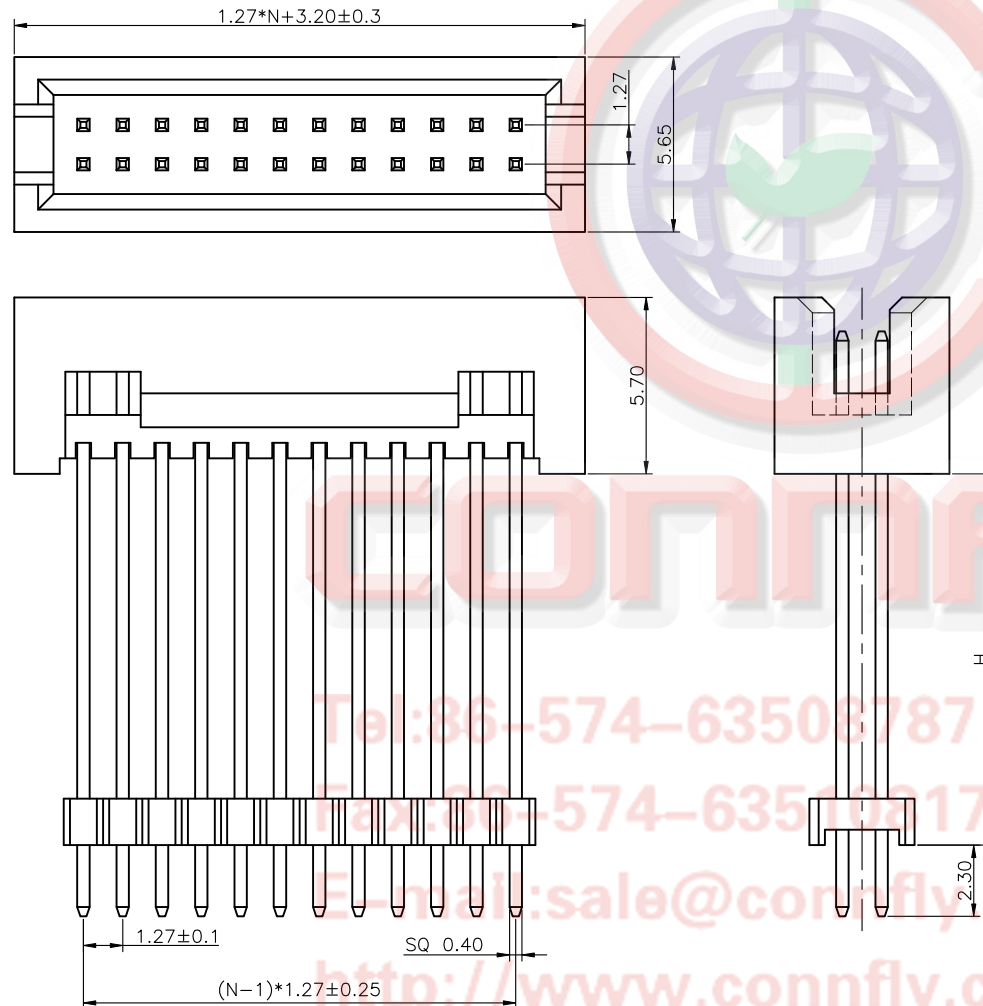

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		
X.	±0.60	X.	±5°	UNITS	mm	1.27mm BOX HEADER STACK V/T TYPE		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1064-01 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET					1 OF 1
DRAWING NO.		C-DS1064-01-XXXXXX-X-A						