

**UF3N20**

Preliminary


*Power MOSFET***3A, 200V N-CHANNEL
POWER MOSFET****■ DESCRIPTION**

The UTC **UF3N20** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with planar stripe and DMOS technology. This technology allows a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **UF3N20** is generally applied in high efficiency switch mode power supplies, active power factor correction and electronic lamp ballasts based on half bridge topology.

■ FEATURES


- * $R_{DS(ON)} < 200m\Omega$ @ $V_{GS}=10V$, $I_D=1.5A$
- * High switching speed
- * 100% avalanche tested

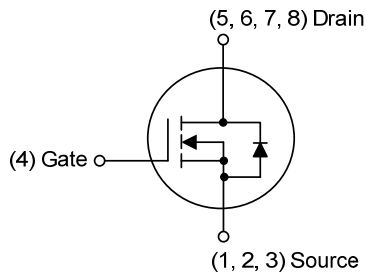■ SYMBOL**■ ORDERING INFORMATION**

Ordering Number	Package	Pin Assignment								Packing
		1	2	3	4	5	6	7	8	
UF3N20G-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: S: Source G: Gate D: Drain

UF3N20G-S08-R (1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) S08: SOP-8 (3) G: Halogen Free and Lead Free
--	--

■ MARKING

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	200	V
Gate-Source Voltage		V_{GSS}	± 20	V
Continuous Drain Current	Continuous	I_D	3	A
	Pulsed	I_{DM}	12	A
Avalanche Energy		E_{AS}	52	mJ
Power Dissipation		P_D	4.5	mW
Junction Temperature		T_J	+150	°C
Storage Temperature Range		T_{STG}	-55~+150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by T_J .

3. $L=55\text{mH}$, $I_{AS}=2.0\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\ \Omega$, Starting $T_J = 25^\circ\text{C}$

4. $I_{SD} \leq 2.4\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ\text{C}$


■ ELECTRICAL CHARACTERISTICS

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =0V	200			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =200V			1	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			10	μA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-10	μA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	I _D =250μA	1.0		3.0	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =1.5A			200	mΩ
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1MHz		1530		pF
Output Capacitance		C _{OSS}			145		pF
Reverse Transfer Capacitance		C _{RSS}			8		pF
SWITCHING PARAMETERS							
Total Gate Charge		Q _G	V _{GS} =10V, V _{DS} =50V, I _D =1.3A I _G =100μA (Note 1, 2)		160		nC
Gate to Source Charge		Q _{GS}			6.0		nC
Gate to Drain Charge		Q _{GD}			3.2		nC
Turn-ON Delay Time		t _{D(ON)}	V _{GS} =10V, V _{DD} =30V, R _G =25Ω, I _D =0.5A (Note 1, 2)		36		ns
Rise Time		t _R			28		ns
Turn-OFF Delay Time		t _{D(OFF)}			490		ns
Fall-Time		t _F			64		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S				3	A
Maximum Body-Diode Pulsed Current		I _{SM}				12	A
Drain-Source Diode Forward Voltage		V _{SD}	I _S =3A			1.3	V


Notes: 1. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.


■ TEST CIRCUITS AND WAVEFORMS

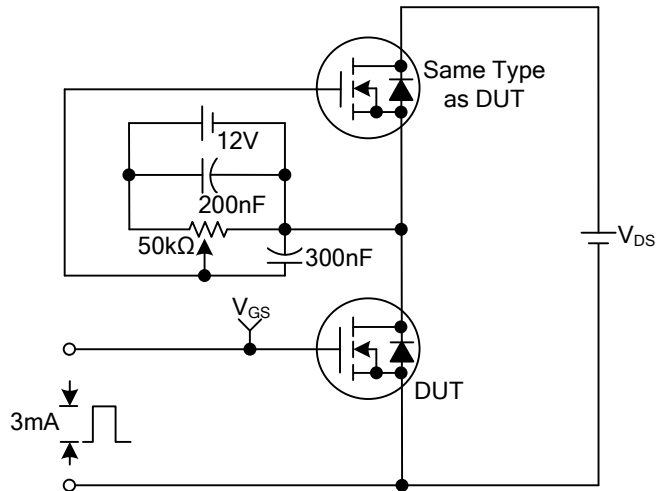


Gate Charge Test Circuit

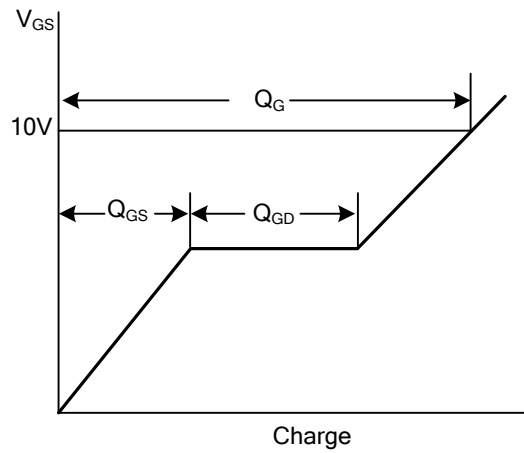


Gate Charge Waveforms

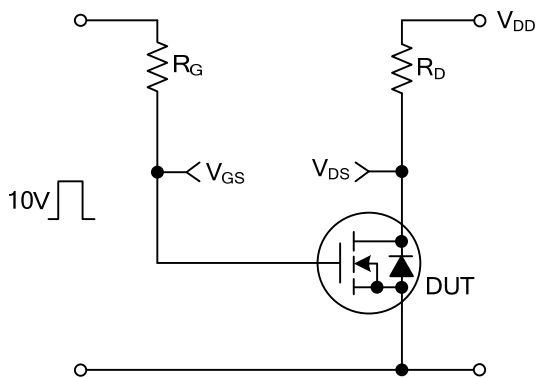


Resistive Switching Test Circuit

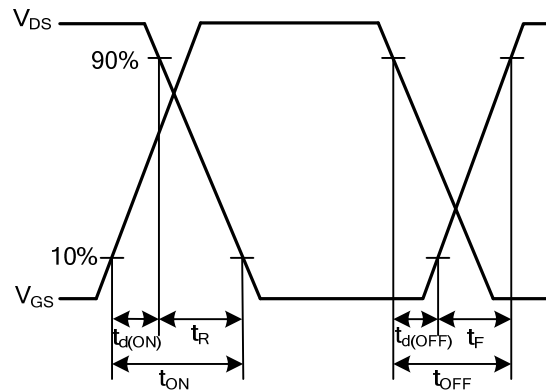

Resistive Switching Waveforms

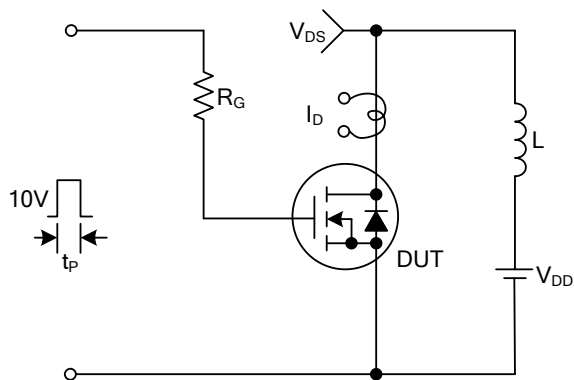


Unclamped Inductive Switching Test Circuit

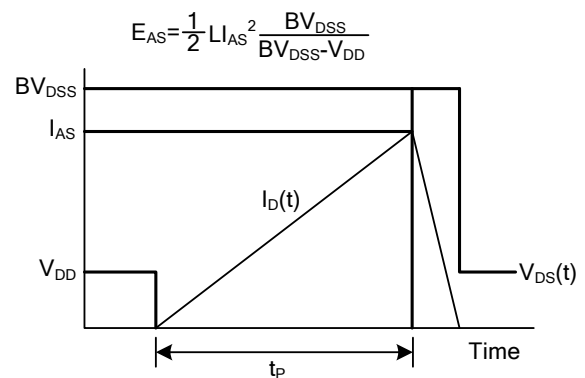


Unclamped Inductive Switching Waveforms

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

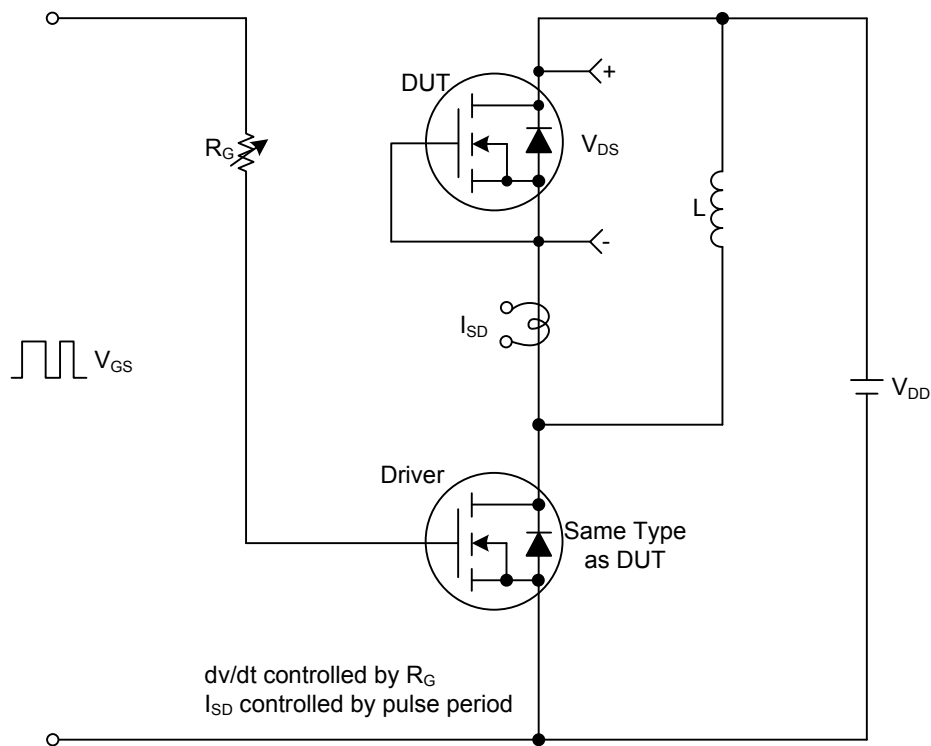

Peak Diode Recovery dv/dt Test Circuit & Waveforms

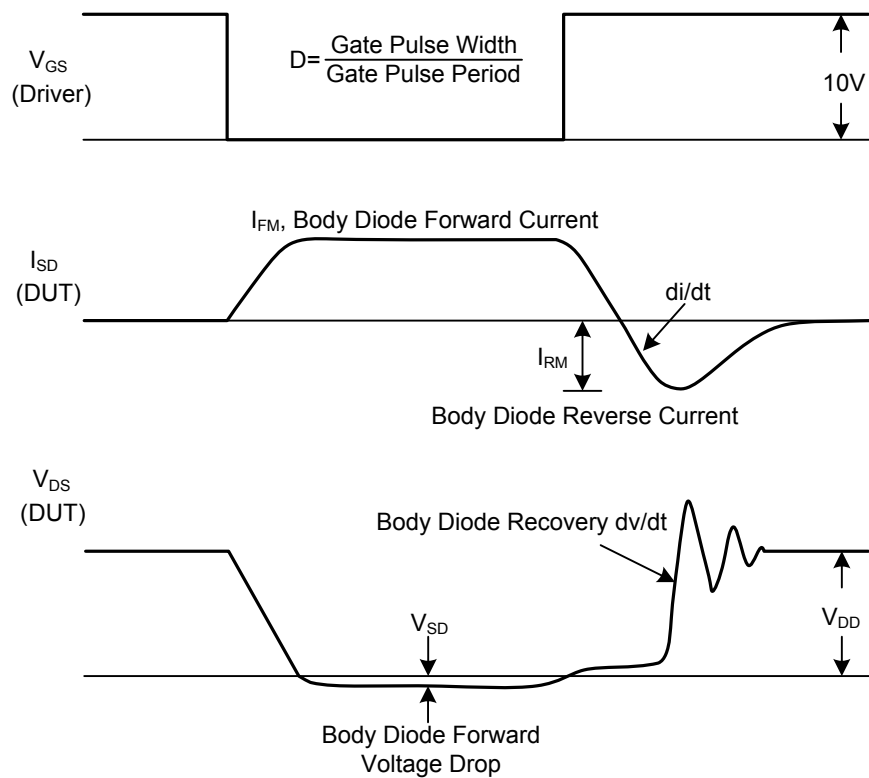

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.