

SPECIFICATION FOR APPROVAL

承 認 書

Description : **Micro Dynamic Speaker**

Kingstate Part No. : **KDSG36050-10E**

Customer's Model No. : _____

Specification No. : **DRD-B431**

Number Of The Edition : **1.1**

CUSTOMER'S APPROVED SIGNATURE		





志豐電子股份有限公司 KINGSTATE ELECTRONICS CORP.

Address: 10F, No. 69-11, Sec. 2, Chung Cheng E. Rd., Tamshui County, Taipei Hsien, Taiwan, R.O.C.

International sales dept.: TEL:886-2-2809-5651 FAX:886-2-2809-7151

Domestic sales dept.: TEL:886-2-2809-0668 FAX:886-2-28096748

<http://www.kingstate.com.tw>

Approved by	Checked by	Issued by
	 2017.8.7.	王川 2017.08.07

A. SCOPE 範疇

This specification applies speaker, **KDSG36050-10E**

此規格書適用於喇叭, **KDSG36050-10E**

B. SPECIFICATION 規格

No.	Item	Symbol	Unit	Specification	Condition
1	Dimension 尺寸		mm	$\phi 36 \times 4.3$	
2	Power Rating 功率		W	Rated. 1.0W/ MAX.1.5W	Maximum Power:IEC-60268-5 Filter 60s On/120s Off 10 Cycles (Room TEMP.)
3	Impedance 阻抗	Ω	ohm	$50 \pm 15\%$	At 1.0KHz 1.0V
4	Resonance Frequency 低音諧振	Fo	Hz	$550 \pm 20\%$	At 1.0V
5	Output S.P.L. 音壓位準		dB	$92 \pm 3\text{dB}(0.1\text{w}/0.1\text{m})$	Average 1.0,1.2k,1.5,2.0 KHz
6	Frequency Range 有效頻寬		Hz	Fo--6K	Output S.P.L. $\pm 10\text{dB}$
7	Distortion 失真		%	$< 15\%$ Max.	At 1.0KHz , 0.1W
8	Voice Coil 音圈		mm		
9	Magnet 磁石		mm	$\phi 12.5 \times 1.5$	Nd-Fe-B (鈹鐵鋁)
10	Flux Density 磁通密度		Gauss		
11	Operating temp. 操作溫度		$^{\circ}\text{C}$	-40 ~ +85	
12	Buzzer & Rattle 異常音				Not be audible at 7.07V sine wave between Fo ~ 6KHz 輸入 7.07V 正弦波從 Fo 到 6KHz 之間無異常音
13	Weight 重量		g	6.8	
14	Material 材質				
15	Environmental Protection Regulation 環保法規			RoHS 2.0	

頻率響應曲線

31

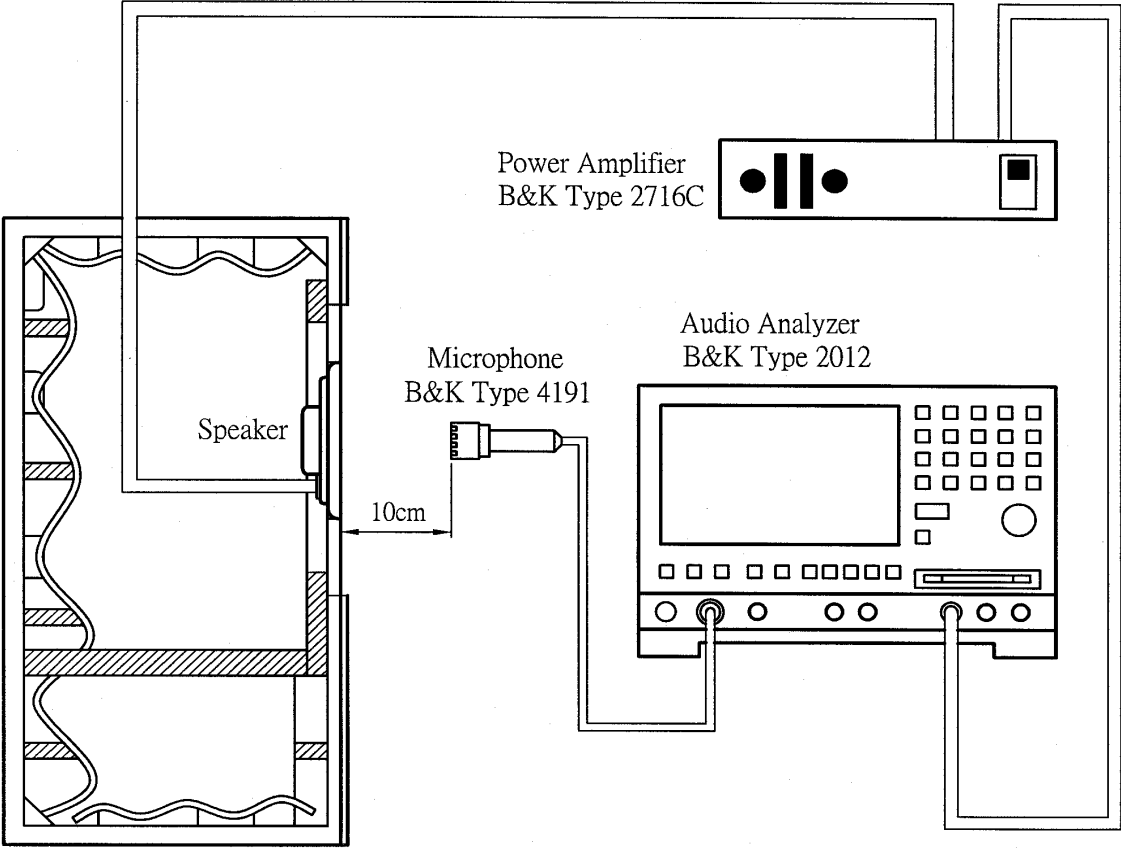


Figure 1



Unit: mm

E. MEASUREMENT CIRCUIT 測量線路

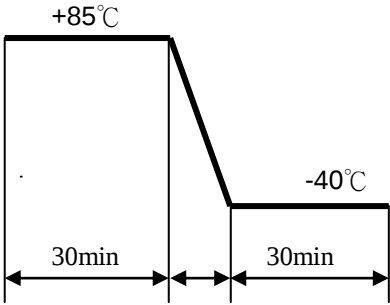


JIS C5531
940mm x 640mm x 1240mm

F. MECHANICAL CHARACTERISTICS 機械特性

No.	Item	Test condition	Evaluation standard
1	Solderability 焊錫附著性 (Connector excepted) 端子類不適用此項	Stripped wires of lead wires are immersed in rosin for 5 seconds and then immersed in solder bath of +270±5°C for 3±0.5 seconds. 裸線部份浸入松香溶液 5 秒後,再浸入+270±5°C 熔融焊錫槽 3±0.5 秒.	90% min. stripped wires shall be wet with solder.(Except the edge of terminal) 浸入裸線部份附著焊錫 90% 以上.(末端斷面不算).
2	Lead Wire Pull Strength 線材拉力	The pull force shall be applied to double lead wire : Horizontal 3.0N(0.306kg) for 30 seconds. Vertical 2.0N(0.204kg) for 30 seconds. 雙線材水平方向施以 3.0N(0.306kg) 的力量, 垂直方向施以 2.0N(0.204kg) 的力量,各 30 秒.	No damage and cutting off 線材不鬆動, 不脫落.
3	Vibration Test 振動測試	Speaker shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 per-pendicular directions for 2 hours. 振動週波數 10~55Hz、全振幅 1.5mm 於 X.Y.Z 3 個方向, 各 2 小時.	No obstacle to be harmful to normal operation; damages, cracks, rusts and distortions. Should not be audible at 7.07V sine wave between Fo ~ 6KHz
4	Drop Test 落下測試	Drop the speakers contained in normal box onto the board 40mm thick 10 times from the height of 75cm 將揚聲器置於盒中, 自 120 公分高度落在 20mm 木板上共 10 次.	測試後無任何障礙防礙正常操作.且在輸入 7.07V 正弦波從 Fo 到 6KHz 之間無異常音.

G. ENVIRONMENTAL TEST 環境試驗

No.	Item	Test conditions	Evaluation standard
1	High temp. Test 高溫測試	After being placed in a chamber at +85°C for 96 hours 置於+85°C環境中 96 小時	Being placed for 6 hours at +25°C, speaker shall be measured. No obstacle to be harmful to normal operation; damages, cracks, rusts, etc. Should not be audible at 7.07V sine wave between Fo ~ 6KHz. Fo should meet initial one. S.P.L. deviation of unit should be within ±3dB. 經測試後, 靜置於+25°C (室溫)環境中 6 小時後, 測試後無任何障礙防礙正常操作. 且在輸入 7.07V 正弦波從 Fo 到 6KHz 之間無異常音. Fo 與原規格值相同, 輸出音壓變化量在±3dB 內.
2	Low temp. Test 低溫測試	After being placed in a chamber at -40°C for 96 hours. 置於-40°C環境中 96 小時	
3	Humidity test 相對濕度測試	After being placed in a chamber at +85°C and 85±5% RH relative humidity for 56 days 置於+85°C, 相對濕度 85±5%環境中 56 天	
4	Temp. cycle test 溫度循環測試	The part shall be subjected to 100 cycles. One cycle shall be consist of: 單體承受溫度循環測試 100 次, 其循環內容如圖示: 	

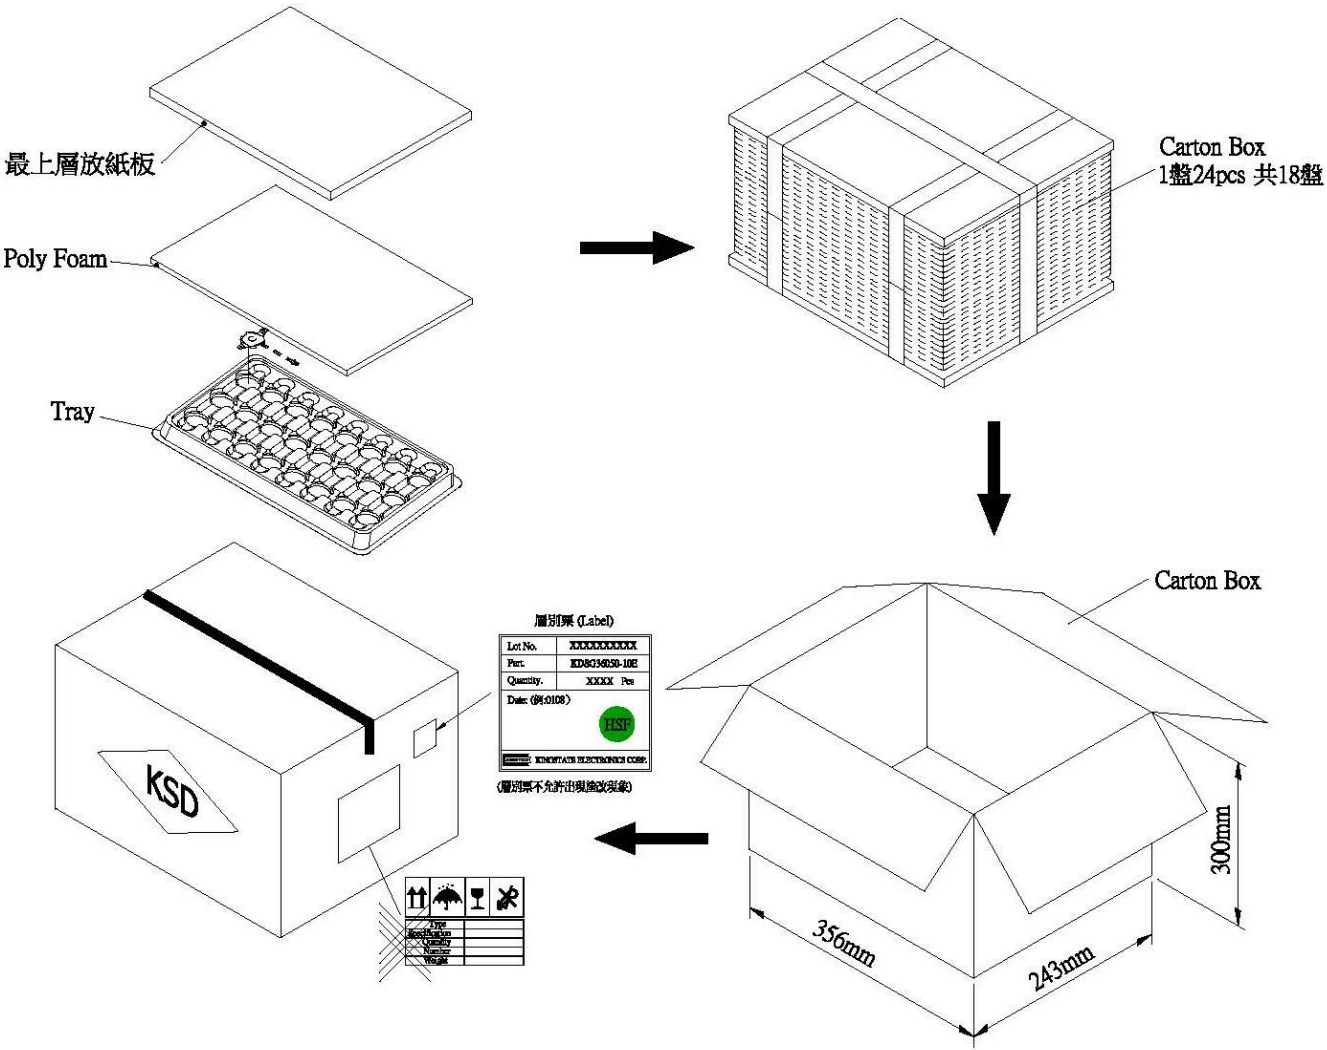
H. RELIABILITY TEST 信賴性試驗

No.	Item	Test conditions	Evaluation standard
1	Load test 連續負荷	1.0W white noise is applied for 240 hours, at room temp. 在室溫下, 輸入功率 1.0W, 白雜音連續操作 240 小時.	Being placed for 1 hours at +25°C, speaker shall be measured. No obstacle to be harmful to normal operation; damages, cracks, rusts, etc. Should not be audible at 7.07V sine wave between Fo ~ 6KHz. Fo should meet initial one. S.P.L. deviation of unit should be within ±3dB. 經測試後, 靜置於+25°C (室溫)環境中 1 小時後, 測試後無任何障礙防礙正常操作. 且在輸入 7.07V 正弦波從 Fo 到 6KHz 之間無異常音. Fo 與原規格值相同, 輸出音壓變化量在±3dB 內.

TEST CONDITION.

Standard Test Condition :	a) Temperature : +5 ~ +35°C	b) Humidity : 45-85%	c) Pressure : 860-1060mbar
一般測試條件 :	a) 溫度 : +5 ~ +35°C	b) 濕度 : 45-85%	c) 氣壓 : 860-1060mbar
Judgment Test Condition	a) Temperature : +25 ± 2°C	b) Humidity : 60-70%	c) Pressure : 860-1060mbar
爭議時測試條件:	a) 溫度 : +25 ± 2°C	b) 濕度 : 60-70%	c) 氣壓 : 860-1060mbar

I. PACKING STANDARD 包裝規格



Tray	347mmx235mmx23mm	1x24PCS=24PCS
Carton Box	356mmx243mmx300mm	24PCSx18=432PCS