


**UK1398****Power MOSFET****N-CHANNEL MOSFET FOR HIGH SPEED SWITCHING****DESCRIPTION**

The UTC **UK1398** uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

FEATURES


- * $R_{DS(ON)} \leq 20 \Omega$ @ $V_{GS}=4.0V$, $I_D=10mA$
- * Low capacitance
- * Low gate charge
- * Fast switching capability
- * Avalanche energy specified

SYMBOL**ORDERING INFORMATION**



Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UK1398L-AE3-R	UK1398G-AE3-R	SOT-23	G	S	D	Tape Reel
UK1398L-T92-B	UK1398G-T92-B	TO-92	S	D	G	Tape Box
UK1398L-T92-K	UK1398G-T92-K	TO-92	S	D	G	Bulk

Note: Pin Assignment: G: Gate S: Source D: Drain

UK1398G-AE3-R (1) Packing Type (2) Package Type (3) Green Package		(1) R: Tape Reel, B: Tape Box, K: Bulk (2) AE3: SOT-23, T92: TO-92 (3) G: Halogen Free and Lead Free, L: Lead Free
---	--	---

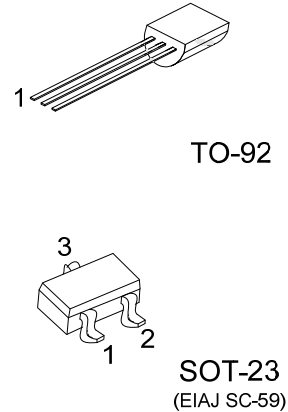

MARKING

SOT-23	TO-92
 L: Lead Free G: Halogen Free	 L: Lead Free G: Halogen Free Date Code

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	50	V
Gate-Source Voltage		V_{GSS}	± 7.0	V
Continuous Drain Current	DC	I_D	100	mA
	Pulse(Note 2)		200	mA
Power Dissipation	SOT-23	P_D	200	mW
	TO-92		625	
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.






2. Pulse width $\leq 10\text{ms}$, Duty cycle $\leq 50\%$.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	50			V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=50V, V_{GS}=0V$			10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 7.0V, V_{DS}=0V$			± 5.0	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0		3.0	V
	$V_{GS(OFF)}$	$V_{DS}=3.0V, I_D=1.0\mu A$	0.6	1.2	1.5	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=4.0V, I_D=10mA$			20	Ω
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{DS}=5.0V, V_{GS}=0V, f=1MHz$		11		pF
Output Capacitance	C_{OSS}			11		pF
Reverse Transfer Capacitance	C_{RSS}			4		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	$t_{D(ON)}$	$V_{DD}=3.0V, I_D=20mA,$ $V_{GS(ON)}=3.0V, R_G=10\Omega,$ $R_L=150\Omega$		15		ns
Turn-ON Rise Time	t_R			100		ns
Turn-OFF Delay Time	$t_{D(OFF)}$			30		ns
Turn-OFF Fall-Time	t_F			35		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Diode Forward Voltage	V_{SD}	$I_S=1A, V_{GS}=0V$			1.3	V

■ TYPICAL CHARACTERISTICS

Switching Time Waveforms

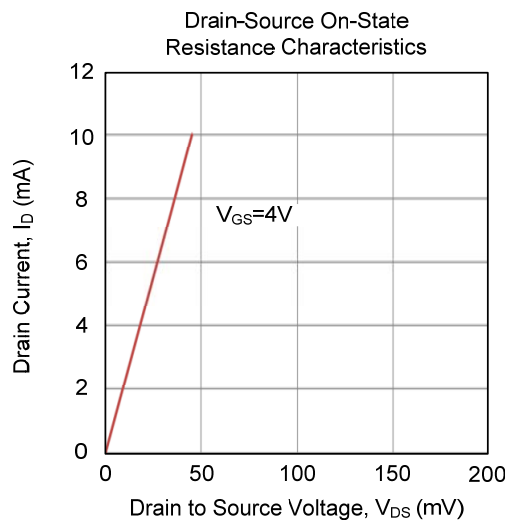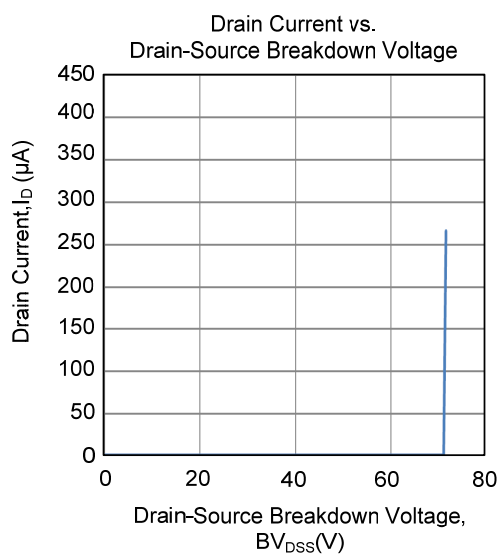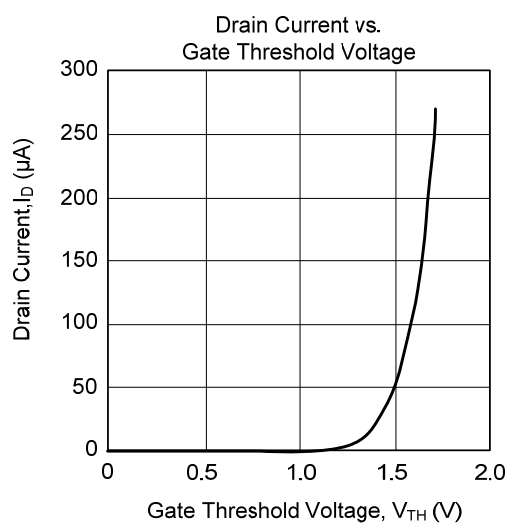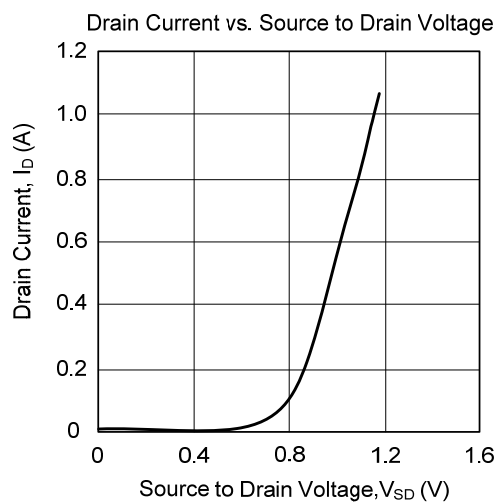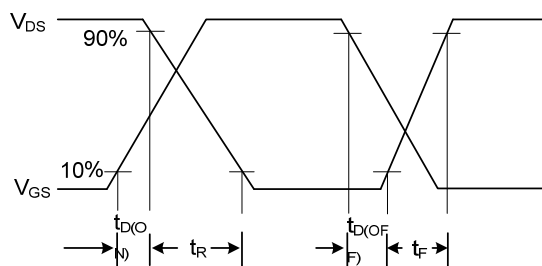

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.