


SIGN	DATE	DESCRIPTION	APPROVER
△	10/16/14	Change the position of protruding point & update the drawing	Evan
THIS IS CAD DRAWING, DO NOT REVISE MANUAL Y!!!			



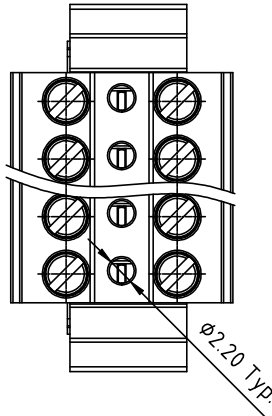


Material

- Item ① Terminal up housing: Thermoplastic (UL94V-0)
- Item ② Terminal down housing: Thermoplastic (UL94V-0)
- Item ③ Terminal screw: Steel/Zinc plating "-" slot type
- Item ④ Clamp: Brass, Ni plated
- Item ⑤ Wire guard: PhBz , Tin plated
- Item ⑥ With latch: Thermoplastic (UL94V-0)

Electrical


- Voltage rating: 300V
- Current rating: 12A
- Solid wire (AWG) : 12-24
- Stranded wire (AWG) : 12-24
- Torque (lb-in) : 4, 3
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Critical dimension: ∇

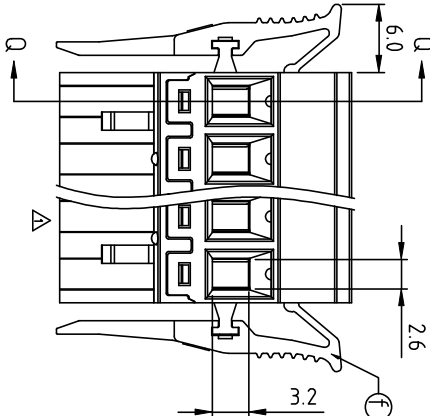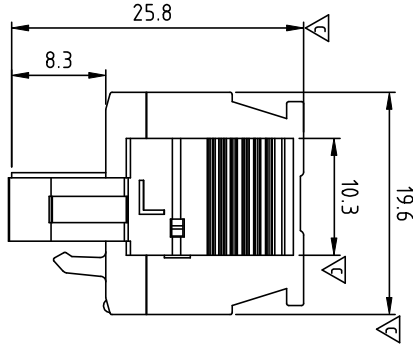

SECTION Q-Q

N=NUMBER OF POLES

Dim L	N×5.08
Dim P	(N-1)×5.08

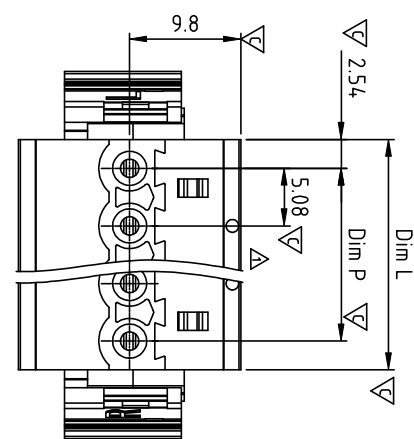

TOL				
2P-6P	7P-12P	13P-18P	19P-24P	
Dim L	±0.15	±0.25	±0.35	±0.40
Dim P	±0.15	±0.25	±0.35	±0.40

K5 XX 51 X 2 XXXX G

- △ No. OF POLES
- 02 2 poles
- 03 3 poles
-
- 24 24 poles
- Color
- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL 2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- C Green(RAL 6018/U)
- G RoHS compliant △ (lead<4%) In copper Alloy
- 0000: "0" Logo (Standard)
- 000A: "ANYTEK" Mark
- Any special item by customer request.
- please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K5 - 5.08 Series 2P-24P "-" screw (With latch)			
PART NO.	K5xx51x2xxxxG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO
	Evan	2014.10.16	Evan	2014.10.16
				SHEET: 01/01
				REV: C
				UNIT: mm
				SCALE: NONE
				X°
				±0.50
				±0.30
				±0.10
				±1°