

TFT DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司 Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

salescontact@raystar-optronics.com | www.raystar-optronics.com

RFF500F-AWW-DNG

General Specifications

- Size: 5.0 inch
- Dot Matrix: 800 × 3(RGB) × 480 dots
- Module dimension: 120.7(W) × 75.8(H) × 4.475 mm
- Active area: 108(W) × 64.8 (H) mm
- Pixel pitch: 0.135(W) × 0.135(H) mm
- LCD type: TFT, Normally Black, Transmissive
- View Direction: 80/80/80/80 (IPS)
- Aspect Ratio: 5:3
- Driver IC : ST7262
- Interface: 24 bit R.G.B.
- Backlight Type: LED ,Normally White
- PCAP IC: ILI2130
- PCAP Interface: I2C
- PCAP FW Version: 0x07.0x00.0x00.0x00.0xA1.0x25.0x50.0x00
- PCAP Resolution:16384*16384
- Touch Panel: Projected Capacitive Touch Panel, PCAP
- Surface: Glare

Interface

LCM PIN Definition


Pin	Symbol	Function
1	VLED-	Power for LED backlight (Cathode)
2	VLED+	Power for LED backlight (Anode)
3	GND	Power Ground
4	VDD	Power voltage
5	R0	Red data (LSB)
6	R1	Red data
7	R2	Red data
8	R3	Red data
9	R4	Red data
10	R5	Red data
11	R6	Red data
12	R7	Red data(MSB)
13	G0	Green data(LSB)
14	G1	Green data
15	G2	Green data
16	G3	Green data
17	G4	Green data
18	G5	Green data
19	G6	Green data
20	G7	Green data(MSB)
21	B0	Blue data(LSB)
22	B1	Blue data
23	B2	Blue data
24	B3	Blue data
25	B4	Blue data
26	B5	Blue data
27	B6	Blue data
28	B7	Blue data(MSB)
29	GND	Power Ground
30	CLK	Sample clock(DCLK)

31	DISP	Display on/off
32	NC	No connection
33	NC	No connection
34	DE	Data input enable
35	NC	No connection
36	GND	Power Ground
37	NC	No connection
38	NC	No connection
39	NC	No connection
40	NC	No connection

PCAP PIN Definition

Pin	Symbol	Function
1	VSS	Ground for analog circuit
2	VDDT	Power Supply : +3.3V
3	SCL	I2C clock input I2C clock input
4	NC	No connect
5	SDA	I2C data input and output
6	NC	No connect
7	/RST	External Reset, Low is active
8	NC	No connect
9	/INT	External interrupt to the host
10	VSS	Ground for analog circuit

Contour Drawing

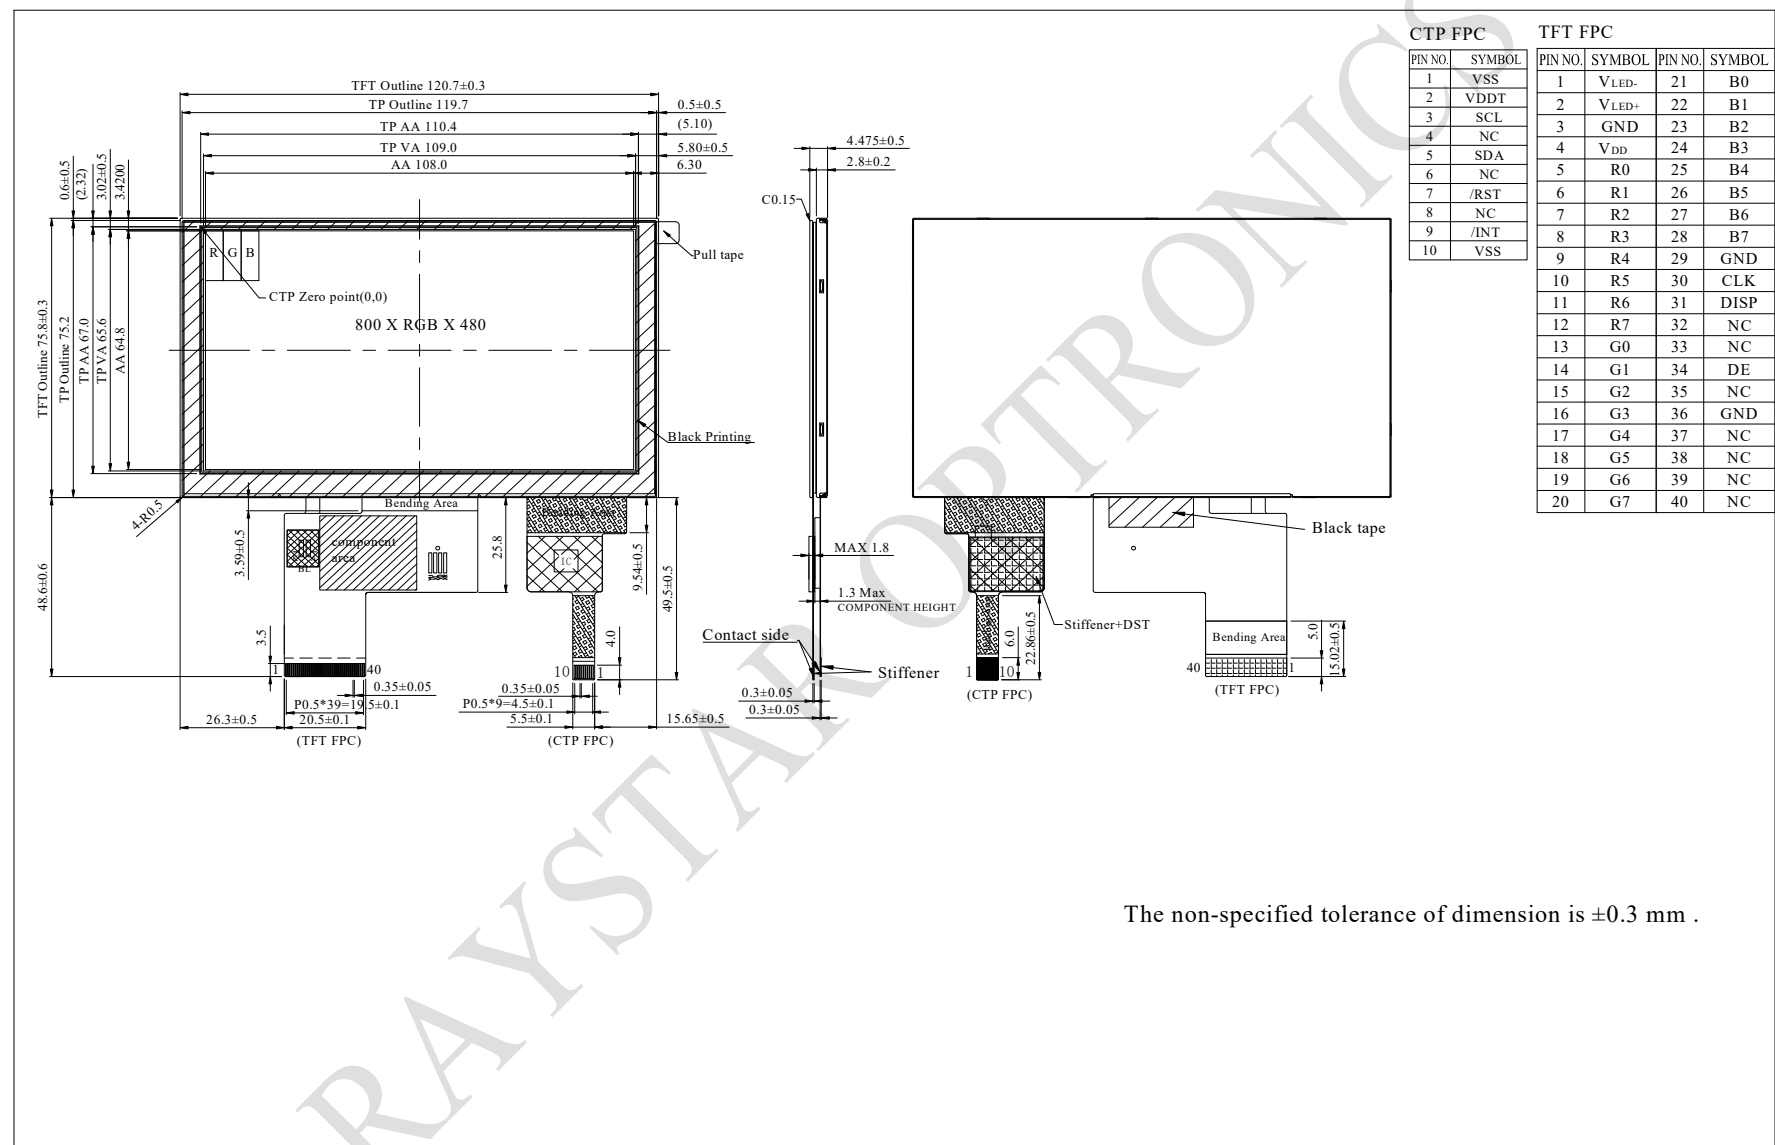

The non-specified tolerance of dimension is ±0.3 mm .

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Typical Operation Conditions

Item	Symbol	Values			Unit
		Min.	Typ.	Max.	
Power voltage	VDD	3.1	3.3	3.6	V
Current for Driver(Black)	IDD	-	65	97.5	mA
Input logic high voltage	VIH	0.7 VDD	-	VDD	V
Input logic low voltage	VIL	0	-	0.3 VDD	V
Supply PCAP	VDDT	3.1	3.3	3.5	V
	I _{CTP}	—	51	77	mA

Backlight Driving Conditions

Item	Symbol	Values			Unit
		Min.	Typ.	Max.	
Voltage for LED backlight	VL	16.8	19.2	20.4	V
Current for LED backlight	IL	--	60	--	mA
LED life time	-	--	50,000	-	Hr