


RoHS Compliant

N=NUMBER OF CONTACTS

DIM		TOL				
		1P	2P	3P-4P	5P-8P	9P-12P
Dim L	N×10.0	±0.20	±0.40	±0.40	±0.50	±0.60
Dim P	(N-1)×10.0	/	±0.20	±0.40	±0.50	±0.60



REV	SIGN	DATE	DESCRIPTION	APPROVER
C	△	05/09-18	Update the drawing	zhangcan
	△	05/09-18	Add Marking and RoHS compliant	zhangcan
	△	05/09-18	Replace the drawing frame	zhangcan
	△	05/09-18	Add 01 1 CONTACTS	zhangcan
D	△	2018.08.29	Modify the Struction	LENA
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Lever: Thermoplastic (UL 94V-0),
- Item ② Cam: Thermoplastic (UL 94V-0),
- Item ③ Middle Body: Thermoplastic (UL 94V-0),
- Item ④ Left side body: Thermoplastic (UL 94V-0),
- Item ⑤ Right side body: Thermoplastic (UL94V-0),
- Item ⑥ Contact: Copper,Matte Tin plated over Nickel plated,
- Item ⑦ Spring clamp: Stainless steel

Electrical:





- Voltage rating: 300 V
- Current rating: 55A
- Wire range(AWG): 16-6 (Solid & Stranded)
- Wire strip length: 12-13 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: 
- Critical dimension: 
- Part No.:

NZ XX 00 X A XXXX G

- △ No. OF POLES
- 01 1 Pole
 - 02 2 Poles
 -
 - 12 12 Poles

- Body Color
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7004/P)
 - 9 White(RAL1102)
 - C Multiple colors

- RoHS compliant (lead<4%) In copper Alloy
- 0000: "①" Logo (Standard)
 - 000A: "ANYTEK" Mark

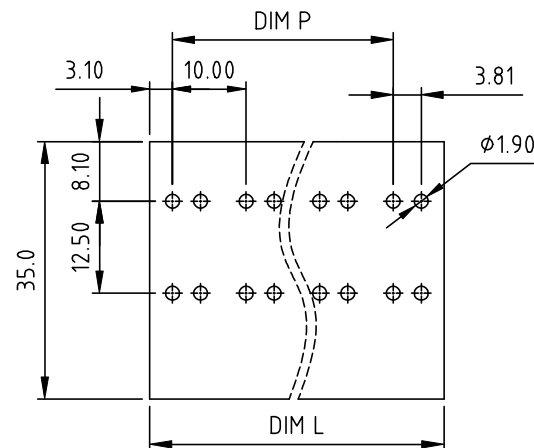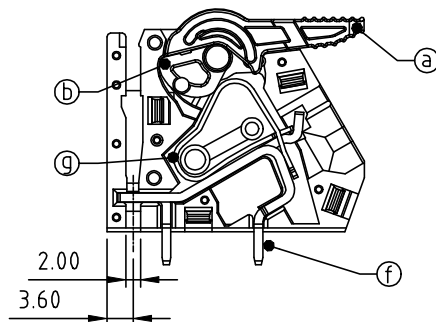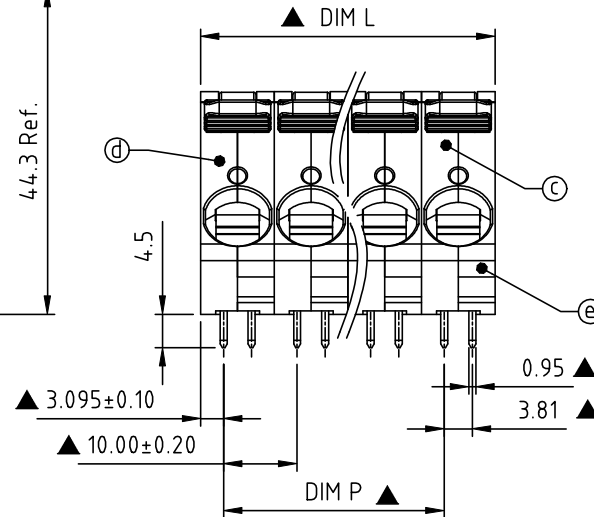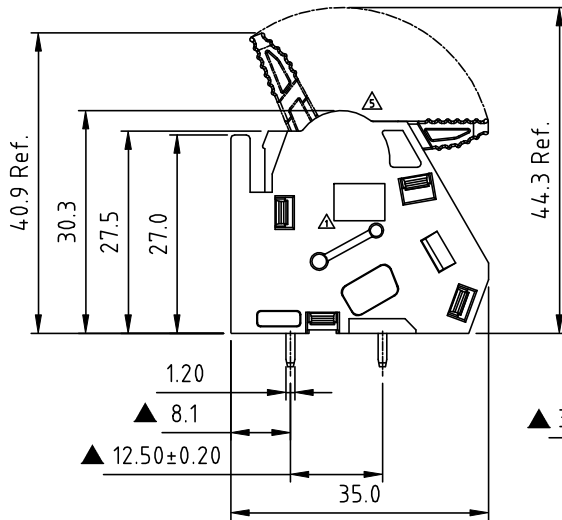

PCB LAYOUT (TOP VIEW)

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	NZ 10.0mm Pitch, with Jumper Slot Series						
PART NO.	NZ XX00XAXXXG			DWG NO.	8NZ0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		LENA 2018.08.29	LENA 2018.08.29			UNIT: mm	X. ±0.50
				SHEET: 01/01		SCALE: 1:1	X.X ±0.30
						REV.: D	X.XX ±0.10
							X° ±1°