

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/10/05'		LJC 05/10/05'
B	ADD SHELL MATERIAL TYPE	JLZ 04/09/15'		

NOTES:

1. SPECIFICATIONS:

- 1.0 CONTACT RESISTANCE:30mΩ max.
- 1.1 INSULATION RESISTANCE:1000MΩ min.
- 1.2 CURRENT RATING:1.5A.
- 1.3 VOLTAGE RATING:30VDC.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V FOR 1 Minute.
- 1.5 OPERATING TEMPERATURE: -25°TO +85°.

2. MATERIALS:

- 2.0 HOUSING:PBT+30% GLASS FIBER(UL 94-0).
- 2.1 CONTACT:COPPER ALLOY
- 2.2 SHELL:COPPER ALLOY OR STEEL.

3. PRODUCT NUMBER CODE:

DS1099 - X X X - X

MATERIAL OF SHELL (B)

Fe: Steel
N/A: Copper Alloy

CONTACT PLATING

0: Selective Gold Flash
03: Selective Gold 3u"
30: Selective Gold 30u"

SHELL PLATING



N: Nickel
6: Tin

COLOR OF HOUSING:

W: WHITE
B: BLACK



SERIES No.

DS1099 series

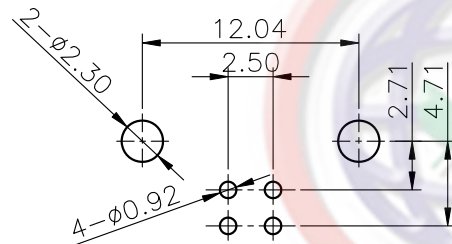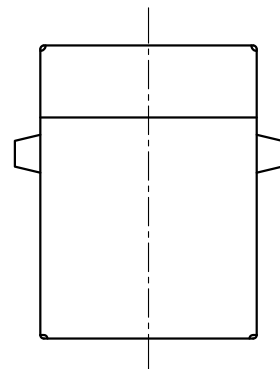

RECOMMEND PCB LAYOUT

TOLERANCE=±0.05

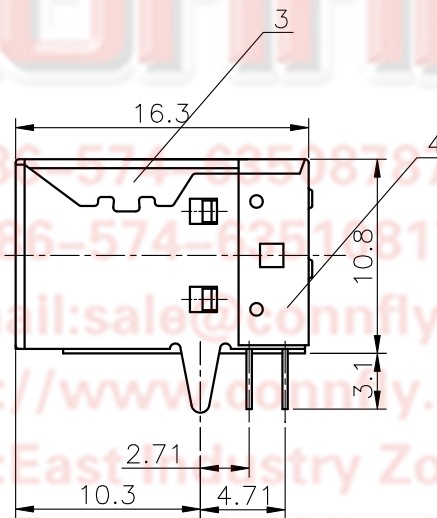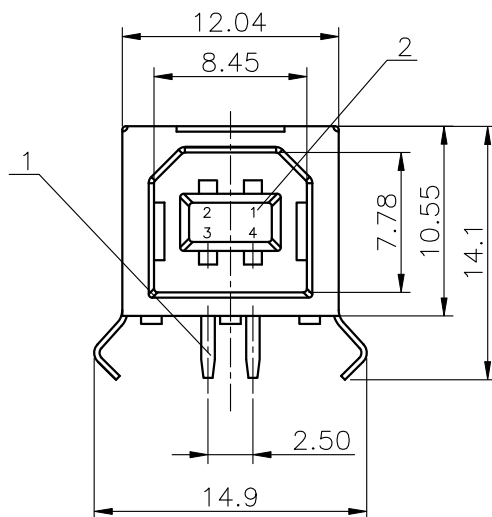

				GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB B TYPE R/A DIP TYPE	
				X. ±0.60 .X ±0.38 .XX ±0.25		X. ±5° .X ±3° .XX ±2°		UNITS	mm			
								SHEET SIZE	A4	SERIES	DS1099 SERIES	
4	BACK SHELL	STEEL	SEE NOTES	DRAWING TYPE		CUSTOMER			 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD			
3	FRONT SHELL	COPPER ALLOY OR STEEL	SEE NOTES	SCALE		1:1	SHEET	1 OF 1				
2	HOUSING	PBT	UL 94 V-0	DRAWING NO.		C-DS1099-XXX-X-B						
1	CONTACT	COPPER ALLOY	SEE NOTES									
ITEM	PART NAME	MATERILAS	FINISHED									



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO., LTD