
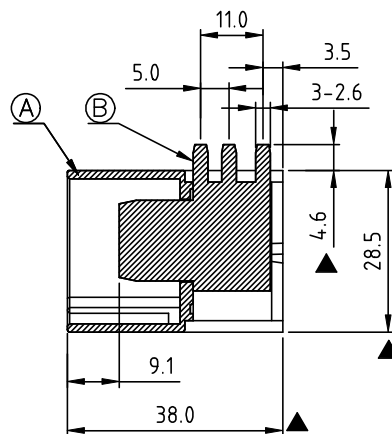
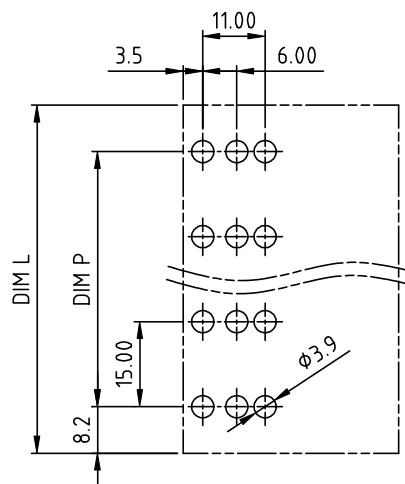
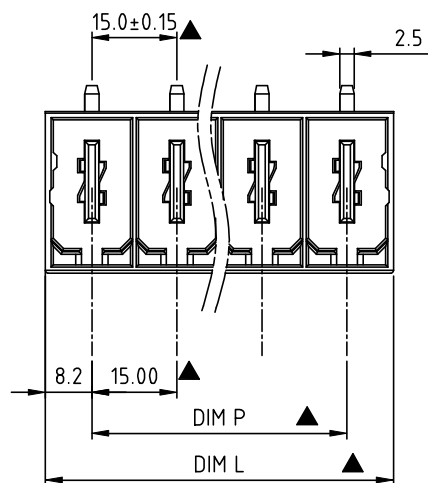


RoHS Compliant

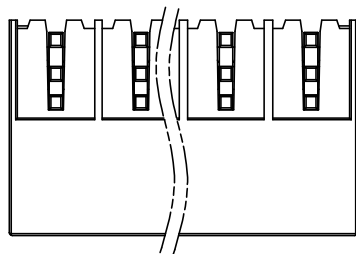

POLE	2	3	4	5	6	7	8	9	10
Dim.L	31.4	46.4	61.4	76.4	91.4	106.4	121.4	136.4	151.4
Dim.P	15.0	30.0	45.0	60.0	75.0	90.0	105.0	120.0	135.0
Tol.	±0.20			±0.35			±0.50		

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		05/03-11	Initial release	Runner
C	△	05/13-20	Add RoHS Compliant, and Amphenol Logo	Chen Bo
	△	05/13-20	Change the symbol of critical dimension	Chen Bo
	△	05/13-20	add cULus safety certification mark	Chen Bo
	△	05/13-20	add the colour code,	Chen Bo
	△	05/13-20	update the wave soldering temperature	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal housing: PBT (UL94V-0)
- Item ② Male contact : Copper. Gold plated.

Electrical:

cULus

- Voltage rating: 600 V
- Current rating: 115 A
- Withstanding Voltage: 2.2 KV
- Operating temperature: -40°C to +115°C
- ⑤ ● Wave soldering temperature: 260°C±5°C/5 Sec
- ③ ● APPROVAL: cULus
- ② ● Critical dimension: ▲

KU xx C 0 x 1 xxxx G

No. OF POLES
02: 2 POLES
:
10: 10 POLES



COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@ Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.



Amphenol

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KU 15.0mm Body Series (Right angle) without flange 2P-10P						
PART NO.	KUxxC0x1xxxxG			DWG NO.	8KU0005		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo 05/13-20	Chen Bo 05/13-20		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV.: C	X.XX	±0.10
						X°	±1°