

TFT DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司 Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

salescontact@raystar-optronics.com | www.raystar-optronics.com

RFA515600B-AYW-ENN

General Specifications

- Size: 15.6 inch
- Dot Matrix: 1920 x RGB x 1080 dots
- Module dimension: 360.0(W) x 212.3(H)x 9.0(D) mm
- Active area: 344.16 x 193.59 mm
- Pixel pitch: 0.17925 (H) x 0.17925 (V) mm
- LCD type: TFT, Normally Black, Transmissive
- Viewing Angle: 80/80/80/80 (IPS)
- Backlight Type: LED, Normally White
- Driver IC: TC2055G
- Interface: eDP
- Touch Panel: Without Touch Panel
- Surface: Anti-Glare

Interface


LCM PIN Definition

Pin No.	Signal Name	Description
1	NC	Not Connect
2	H_GND	Ground
3	Lane1_N	Complement Signal Link Lane 1
4	Lane1_P	True Signal Line 1
5	H_GND	Ground
6	Lane0_N	Complement Signal Link Lane 0
7	Lane0_P	True Signal Line 0
8	H_GND	Ground
9	AUX_CH_P	True Signal Auxiliary Ch.
10	AUX_CH_N	Complement Signal Auxiliary Ch.
11	H_GND	Ground
12-13	LCD_VDD	LCD Logic and Driver Power
14	NC	Not Connect
15-16	LCD_GND	Ground
17	HPD	HPD Signal Pin
18-21	LCD_GND	Ground
22-30	NC	Not Connect

Backlight PIN Definition

Pin No.	Symbol	Description
1	VLED+	Black, LED_ Anode
2	VLED-	White, LED_ Cathode

Contour Drawing

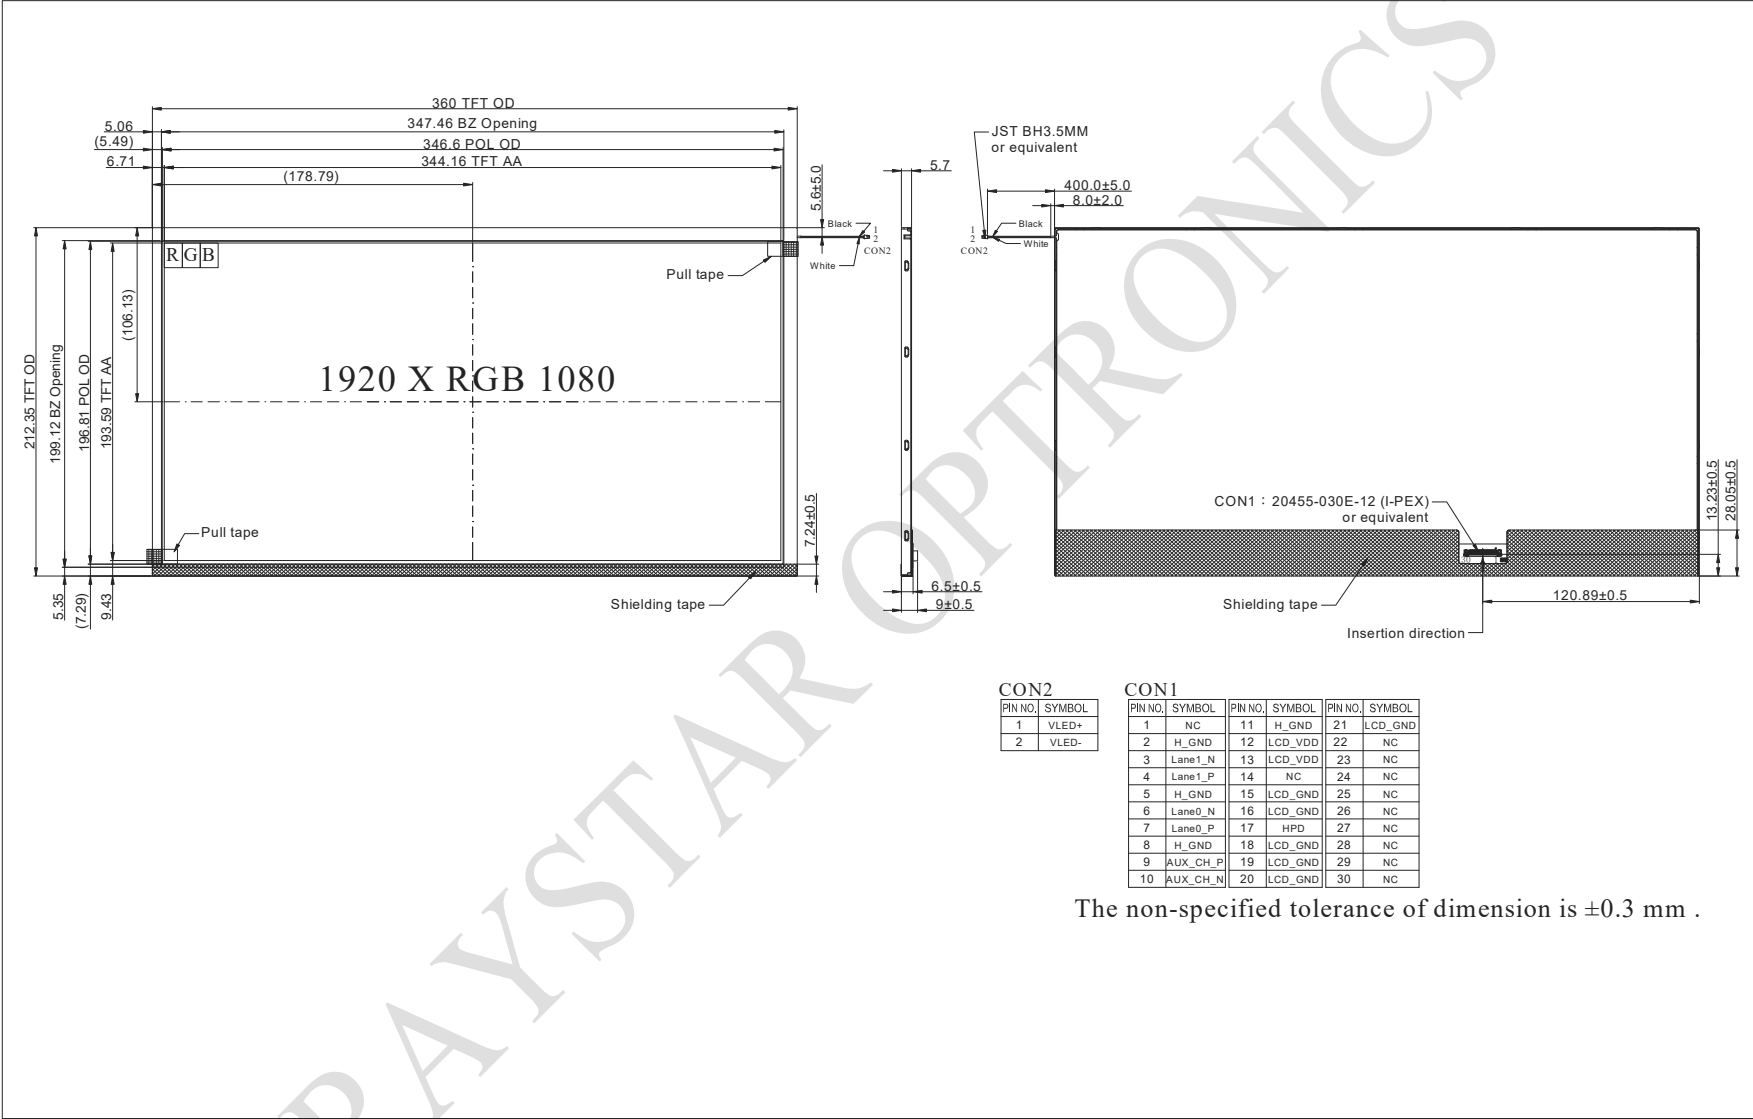

The non-specified tolerance of dimension is ±0.3 mm .

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

TFT LCD Module

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Logic/LCD Drive Voltage	LCD_VDD	3.0	3.3	3.6	V	
LCD_VDD Current	IDD	-	200	300	mA	
LCD_VDD Current	IDDMAX	-	-	400	mA	
LCD_VDD Power	PDD	-	0.66	1.32	W	
Inrush Current	IRush	-	-	2	A	
Allowable Logic/LCD Drive Ripple Voltage	LCD_VDDrp	-	-	100	mV	Vp-p