REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/24/17'	~	



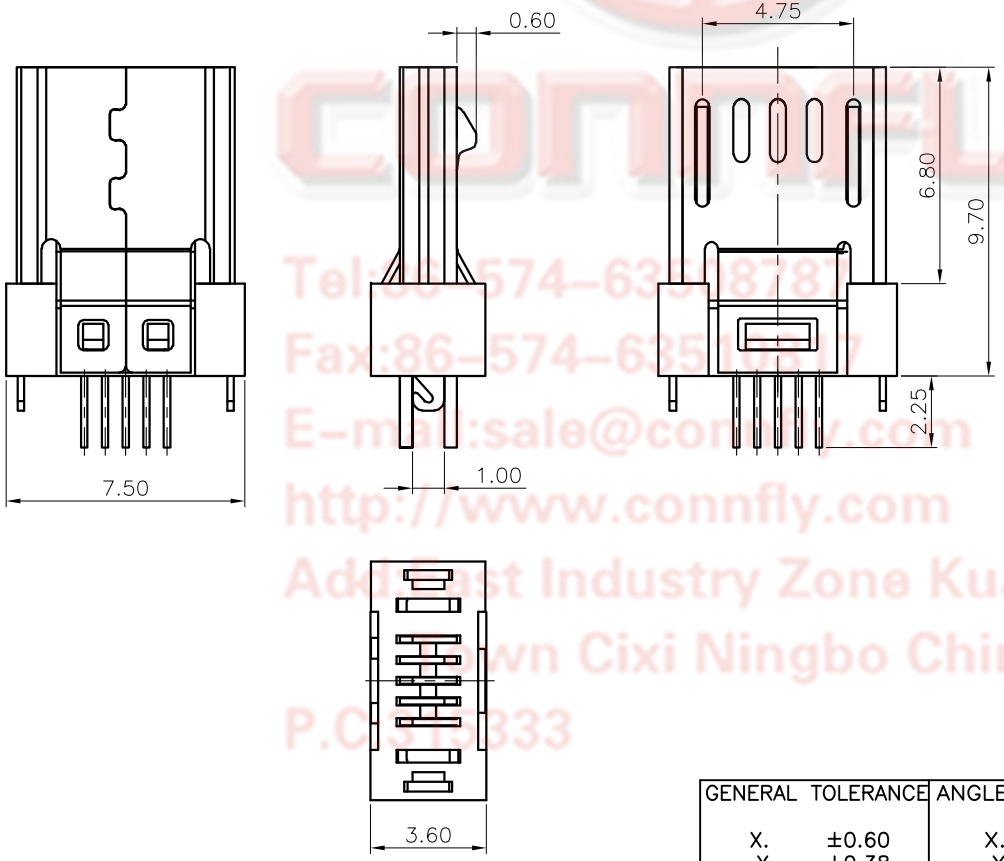

NOTES:

1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
1.2 CURRENT RATING: 1.0A FOR PIN1 AND PIN5.
1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
1.4 HOUSING: THERMOPLASTIC (UL 94-0).
1.5 CONTACT: COPPER ALLOY
1.6 SHELL: COPPER ALLOY.
1.7 HOOK: STAINLESS STEEL.
1.8 PRODUCT NUMBER CODE:
DS1105-09 - X X X

CONTACT PLATED:
0: Selective Gold Flash

SHELL PLATED:
N: Nickel

COLOR OF HOUSING:
B: Black

Tel:86-574-635[illegible]878
Fax:86-574-635[illegible]87
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:31[illegible]33

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1105-09-XXX-A		

PROJECTION		TITLE	MICRO USB MALE 5P V/T TYPE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1105-09 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD